



- (51) International Patent Classification:
E04C 3/08 (2006.01) *E04B 1/18* (2006.01)
- (21) International Application Number:
PCT/US2013/076399
- (22) International Filing Date:
19 December 2013 (19.12.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/739,217 19 December 2012 (19.12.2012) US
14/133,151 18 December 2013 (18.12.2013) US
- (71) Applicant: PATCO, LLC [US/US]; 6260 Downing Street, Denver, Colorado 80216 (US).
- (72) Inventors: VANKER, John Louis; 12885 N. Sand Lake Drive, Lac du Flambeau, Wisconsin 54528 (US). LASTOWSKI, Michael J.; 9079 E. Panorama Circle, Unit 405, Centennial, Colorado 80112 (US).
- (74) Agent: PATEL, Chirag; HolzerIPLaw, PC, 216 16th Street, Suite 1350, Denver, Colorado 80202 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRUSS CONFIGURATION

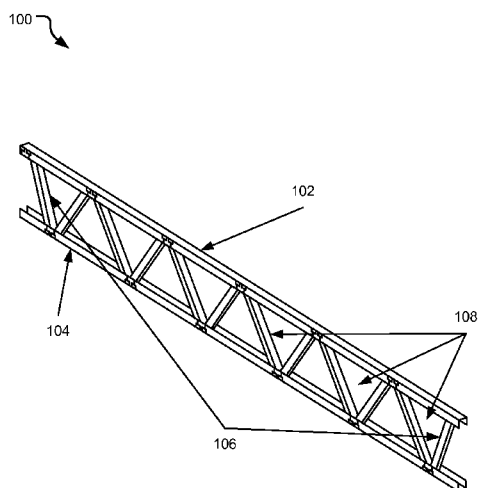

(57) Abstract: An implementation of a truss configuration disclosed herein includes a plurality of trusses, each including a top chord, a bottom chord, a plurality of exterior braces, and a plurality of interior braces, wherein length of each of the plurality of exterior braces is substantially similar and wherein the angle between each of the exterior braces and the top chord is substantially similar. Furthermore, length of each of the plurality of interior braces is substantially similar and wherein the angle between each of the alternate interior braces and the top chord is substantially similar.

FIG. 1