

29/10/04
2004063335

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/101650 A1

- (51) International Patent Classification⁷: B23B 31/11, B23C 5/10, B23D 77/00
- (21) International Application Number: PCT/IL03/00405
- (22) International Filing Date: 19 May 2003 (19.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
150013 4 June 2002 (04.06.2002) IL
- (71) Applicant (for all designated States except US): ISCAR LTD. [IL/IL]; P.O. Box 11, 24959 Tefen (IL).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): HECHT, Gil [IL/IL]; 30/18 Ahad Ha'am Street, 22443 Nahariya (IL).
- (74) Agent: ISCAR LTD., PATENT DEPARTMENT; P.O. Box 11, 24959 Tefen (IL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ROTARY CUTTING TOOL.

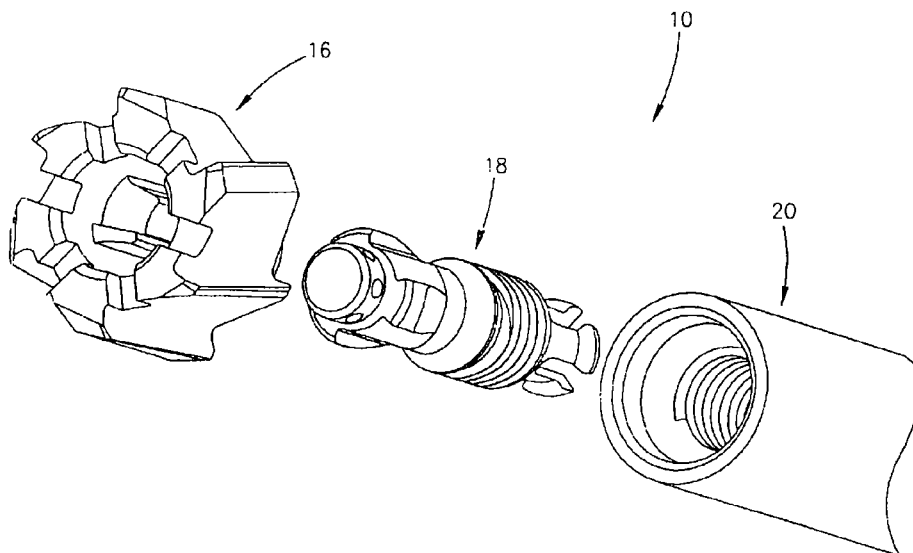

(57) Abstract: A rotary cutting tool (10, 110) comprising a cutting head (16, 116), a screw member (18, 118) and a tool shank (20). The cutting head (16, 116) has an axially directed through bore (27, 127) with locking wings (30, 130) protruding from the bore surface (28, 128). Each locking wing having a sloping locking surface (34, 134) and stopper (36, 136) with a stop surface (40, 140). The screw member (18, 118) has outwardly radially protruding clamping wings (66, 166) each having a sloping clamping surface (70, 170), and an associated side abutment surface (71'', 175''). The screw member is in threaded engagement with the tool shank, with the clamping wings and locking wings aligned in pairs with the locking and clamping surfaces (34, 70; 134, 170) of each pair in abutment, and with each stop surface (40, 140) in abutment with a given side abutment surface (71'', 175'').

WO 03/101650 A1



162162



ACTION