



(43) International Publication Date
20 August 2015 (20.08.2015)

(51) International Patent Classification:
E02B 3/10 (2006.01)

(21) International Application Number:
PCT/DK2015/050031

(22) International Filing Date:
11 February 2015 (11.02.2015)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA201470074 14 February 2014 (14.02.2014) DK

(72) Inventors; and

(71) Applicants : ANDERSEN, Christian Rohde [DK/SE];
Frukthagegränd 12, S-218 45 Vintrie (SE). SØRENSEN,
Allan [DK/DK]; Engvang 12, DK-2300 Copenhagen S
(DK).

(74) Agent: GUARDIAN IP CONSULTING I/S; Diplomvej,
Building 381, DK-2800 Kgs. Lyngby (DK).

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).


Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

(54) Title: A DAM

FIG. 1

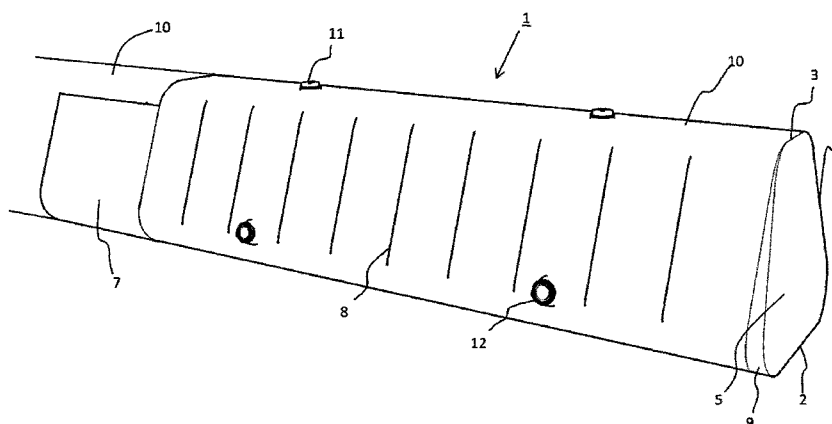

(57) Abstract: A dam (1) for shielding against water, said dam comprising at least one elongate section (10), each section comprising a section bottom (2), a section top (3) and two longitudinal side faces (4) and two end faces (5) together defining a volume (6), said at least one section (10) comprising one or more openings (11, 12) configured for filling and emptying of liquid to the volume (6), said at least one end face (5) comprising a collar (7) extending in the width along the periphery of the end face in extension of the bottom section and the two longitudinal side faces.