

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
12 August 2021 (12.08.2021)



(10) International Publication Number
WO 2021/156601 A1

(51) International Patent Classification:
E21B 23/12 (2006.01) *E21B 29/08* (2006.01)

(21) International Application Number:
PCT/GB2021/050133

(22) International Filing Date:
21 January 2021 (21.01.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2001448.6 03 February 2020 (03.02.2020) GB

(71) Applicant: ENOVATE SYSTEMS LTD [GB/GB]; Building 1, Aberdeen International Business Park, Dyce Drive, Aberdeen Aberdeenshire AB21 0BR (GB).


(72) Inventor: SHUTTLETON, Anthony; 102 Bannermill Place, Aberdeen Aberdeenshire AB24 5EE (GB).

(74) Agent: HGF LIMITED; Document Handling - HGF Aberdeen, 1 City Walk, Leeds Yorkshire LS11 9DX (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: DEVICE AND APPARATUS

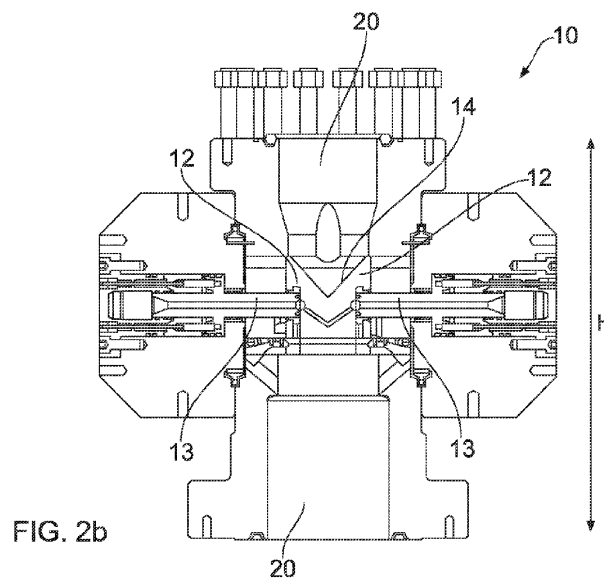

(57) Abstract: The present disclosure provides a bore selector device (10) comprising a housing (11) defining a bore (20) extending therethrough, the bore having a main longitudinal axis. The bore selector device also comprises at least a first and a second actuator (13) opposite each other. Each of the first and second actuators being moveable between respective retracted and extended positions in a direction perpendicular to the main longitudinal axis. Each actuator is connected to a respective ram (12) such that the rams are each moveable between respective retracted positions and extended positions in a direction perpendicular to the main longitudinal axis. Each actuator and attached ram is moveable in the same linear direction.

[Continued on next page]



WO 2021/156601 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*