

A24733

The present invention relates to a semiconductor optical device, and to a method for fabricating a semiconductor optical device, and in particular to a semiconductor optical device which is adapted to form a low loss interconnection with an optical fibre.

The development of semiconductor devices and optical fibres, for example for use in optical communications systems, has occurred very much in isolation from each other. Semiconductor devices, for example lasers, have been developed and optimised with their own particular requirements in mind, for example for lasers, low threshold, high bandwidth, narrow linewidth and high output power are all desirable. These requirements, in combination with the fundamental limitations imposed by the available semiconductor materials, in particular their refractive index, has meant that very small waveguide modes have been essential in order to optimise the functionality of these semiconductor optical devices. In contrast, the requirements for optical fibres have been the need for low loss, low material and waveguide dispersion, a range of mechanical properties (including being handleable), and the ability to be spliced. Although the progression from multi-mode to single mode fibres has seen a reduction in the waveguide mode size for optical fibres, the mode size for single mode fibres which in practice can be spliced, is very much larger than the waveguide mode sizes found in semiconductor optical devices. The spot size ($1/e^2$ diameter) of standard telecommunications single mode optical fibre at a wavelength of $1.55 \mu\text{m}$ is approximately $10 \mu\text{m}$, whereas the spot size at the output facet of a typical double heterostructure semiconductor laser is $1.0 \mu\text{m}$ by $1.5 \mu\text{m}$.

This large mismatch between the mode spot sizes of semiconductor optical devices and optical fibres means that coupling efficiencies between the two are very low, for example as low as 10% for a laser and a cleaved single mode

fibre. In addition, tight alignment tolerances are required in order to maximise the coupling efficiency between a semiconductor laser and an optical fibre, which dramatically increases the cost of packaging semiconductor devices. One
5 of the key economic requirements for the implementation of FTTH (fibre to the home) is the availability of low cost packaged semiconductor lasers. The largest proportion of the cost of the laser is incurred in packaging the device, and a major contribution to this cost is the need to use sub-micron
10 active fibre alignment techniques to align the fibre to the semiconductor laser.

A technique for increasing the coupling efficiency between semiconductor devices and optical fibre is described in "Low Loss Coupling Between Semiconductor Laser And Single
15 Mode Fibre Using Tapered Lensed Fibres" I W Marshall, British Telecom Technology Journal, Vol. 4, No. 2, April 1986. This paper describes how lenses can be formed on the end of single mode fibres by first drawing the fibre to a taper, by holding it under tension in the arc of a fusion splicer, and then
20 forming a lens by melting the tip of the taper. While this technique does indeed increase the coupling efficiency between the fibre and the semiconductor laser, it significantly increases the cost of packaging these devices. In addition to the cost of actually forming the lens, higher
25 alignment tolerances are required when such a lens is utilised, relative to those required with a cleaved fibre end. This arises because the sensitivity of the coupling loss to misalignment of the lensed fibre increases as the lens radius decreases, so that alignment tolerances must be
30 traded for increased coupling efficiency.

An alternative approach to increasing the coupling efficiency between semiconductor optical devices and optical fibres, which also reduces the alignment tolerances required when packaging these devices, comprises the use of passive
35 mode converters. Such devices are described in, for example, "Highly Efficient Fibre Waveguide Coupling Achieved By InGaAsP/InP Integrated Optical Mode Shape Adapters" presented

at European Conference on Optical Communications 1993 by T Brenner and H Melchior and "Spot Size Converters Using InP/InAlAs Multiquantum Well Waveguides For Low Loss Single Mode Fibre Coupling" Electronic Letters 1992, Vol. 28, pp 5 1610-1617, N Yoshimoto et al. These devices are passive optical components which serve to optically connect single mode fibres to semiconductor devices by utilising tapered waveguide sections to transform the small semiconductor modes into the much larger mode of a single mode fibre. A very 10 gradual change in the waveguide parameters of these passive mode converters is required to allow the optical mode to expand adiabatically, in order to avoid high losses. Although these passive mode converters do improve the coupling efficiency between semiconductor devices and optical 15 fibres, and also increase the alignment tolerances, they comprise a further component which must be aligned and packaged between the semiconductor optical device and the optical fibre, and thus increase the complexity, size and cost of these packaged devices.

20 A laser having an integrated passive tapered waveguide which increases its output spot size is described in "Tapered Waveguide InGaAs/InGaAsP Multiple Quantum Well Lasers" T L Koch et al, IEEE Photonics Technology Letters, Vol. 2, No. 2, February 1990. This device employs a conventional multi- 25 quantum well active layer, and a number of passive waveguide layers which are successively etched at different points along the length of the device in order to achieve a stepped, tapered waveguide. The active layer is evanescently coupled to the passive tapered waveguide, and a further passive 30 "outrigger" waveguide spaced a considerable distance from the tapered waveguide, is also employed. The design allows little flexibility for the optimisation of the laser, for example the active layer is limited in thickness by the need to achieve a high degree of evanescent coupling to the 35 passive tapered waveguide. This thickness limit on the active layer limits the high temperature performance of the laser. Furthermore the use of a stepped, tapered passive

waveguide requires a large number of additional stages of photolithography, and thus considerably increases the complexity and cost of device fabrication.

According to a first aspect of the present invention
5 there is provided a semiconductor optical device comprising a composite optical waveguide having first and second ends, the composite waveguide comprising: -

a first optically waveguiding region of semiconductor material, which first region is optically passive and is
10 substantially planar, and

a second optically waveguiding region of semiconductor material, which second region is optically active and is tapered along a substantial part of the length of the second region, from the first end to the second end of the composite
15 waveguide, in a direction substantially parallel to the plane of the first region,

wherein the first and second regions are in optical contact, and the size of the fundamental optical mode supported by the composite waveguide varies along the length
20 of the composite waveguide.

Thus, in contrast to the device disclosed by Koch et al which comprises an active region of uniform cross-section, and a tapered passive region, a device according to the present invention comprises a tapered active region in
25 optical contact with a passive planar waveguide. This arrangement gives far greater flexibility in the design of active semiconductor optical devices having large output spot sizes. For example, because the active region is laterally tapered i. e. tapered in a direction parallel to the plane of
30 the passive waveguide, there is greater flexibility in the allowable thickness of the active layer. This active layer can be chosen to be sufficiently thick that the device has good high temperature performance, without degrading the degree of optical coupling between the active and passive
35 waveguides. It is believed that this extra degree of flexibility in design arises because the active region becomes less strongly guiding as it is tapered.

Furthermore, by employing an active tapered region the length of the taper can be reduced, compared to the length of passive tapers, without significantly affecting the performance of the device. Since the costs of a semiconductor device are in part related to the size of the semiconductor chip employed, this reduction in taper length will allow a reduction in device cost.

The present invention thus provides, for example, a laser having a large spot size output which is better matched to the spot size of standard single mode telecommunications optical fibre, whose other characteristics, for example threshold current, and high temperature performance, have not been unduly compromised. Such large spot size lasers achieve higher coupling efficiencies to optical fibres, and thus allow simple cleaved fibre ends, rather than expensive tapered lensed fibre ends, to be employed. The use of cleaved fibre ends, in combination with a large spot sized laser, may improve the fibre alignment tolerances to such an extent that low cost passive (i.e. without active monitoring of the laser light launched into the fibre) fibre alignment techniques could be employed during the packaging process. Conventional semiconductor laser packages incorporate an active cooling device (e.g. a Peltier element) for maintaining the temperature of the laser chip at a low level, for example at, or below room temperature. A further reduction in the cost of packaged lasers may be achieved if the active cooling device for the laser chip is excluded. This may be possible with lasers according to the present invention because of their good high temperature performance.

Advantageously the tapered part of the optically active region is truncated. Although truncation of the taper does cause loss due to the discontinuity in refractive index experienced by light travelling down the taper, it has surprisingly been found that this truncation loss does not greatly affect the performance of devices according to the present invention. This truncation of the taper allows the taper length to be reduced significantly. Furthermore, it is

believed that truncating the taper avoids the undesirable effect of non-radiative recombinations at the edge of the active region which could become significant as the active volume is reduced.

5 Advantageously the optically active region is tapered in a direction substantially perpendicular to the plane of the passive region. Reducing the height, as well as the width, of the optically active region will further reduce the strength of the optical waveguiding of this region, thus
10 increasing further the size of the optical mode supported by the composite waveguide. Tapering the height of the optically active region may also reduce the loss due to truncation of the taper.

 Preferably the optically active region comprises a
15 multi-quantum well structure. Such structures have good high temperature performance, and low thresholds particularly when they comprise a large number of wells, for example at least eight.

 According to a second aspect of the present invention
20 there is provided

- 1) epitaxially growing a planar wafer comprising an active region above a passive region;
- 2) defining a first mesa comprising the active region;
- 25 3) forming a mask on the first mesa, the width of the mask being less than the width of said first mesa, the mask width varying along the length of the mask; and
- 30 4) defining a second mesa, of substantially the same width as the first mesa, which second mesa comprises the passive region, and redefining the first mesa to correspond to the mask.

 The method of the present invention thus provides a
35 simple, two stage, technique for defining a composite waveguide structure having a tapered active region, and a planar passive region.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a schematic of the composite waveguide structure employed in a large spot size laser according to
5 the invention;

Figure 2 is a graph of the critical taper length against the width of the active waveguide, calculated using Love's method;

Figure 3 is a graph of the single pass loss vs. active
10 waveguide width truncation for a 16 well MQW active layer on a 3.0 μ m wide, 0.16 μ m thick passive guide;

Figure 4 shows an epitaxially grown planar wafer;

Figure 5 a) to e) show various stages in the growth of a double mesa structure, of a large spot size laser according
15 to the invention;

Figure 6 a) to d) show further stages in the growth of the double mesa structure from each end of the device;

Figure 7 shows the device after notching, and material transport, with the confinement layers in place;

20 Figure 8 shows the device after second stage overgrowth;

Figure 9 a) and b) show a schematic cross section of the completed device from each end;

Figure 10 is a graph of the threshold current of large
25 spot size lasers according to the invention having different taper lengths, as a function of temperature;

Figure 11 is a graph showing the coupling efficiency of large spot size lasers of different taper lengths to standard cleaved fibre;

30 Figure 12 is a graph showing the coupling efficiency of large spot size lasers having different taper lengths to cleaved small core fibre;

Figure 13 is a contour plot showing the optical field distribution calculated for a 7 μ m wide, 0.07 μ m thick, 1.1
35 μ m quaternary passive waveguide with 5 μ m InP overgrowth and arsenic doped silica glass (ASG);

Figure 14 is a graph showing the truncation loss

against active waveguide width for a 16 well active layer device having the passive waveguide shown in Figure 13;

Figure 15 is a graph showing the critical taper length according to Love's method for a 16 well active layer device
5 having the passive waveguide shown in Figure 13;

Figure 16 is a graph showing truncation loss against active waveguide width for an 8 well strained active layer device having the passive waveguide shown in Figure 13;

Figure 17 shows the critical taper length by Love's
10 method for an 8 well strained active layer device having the passive waveguide shown in Figure 13; and

Figure 18 is a graph showing the taper profile for a linear taper, and a three section taper of 60 μm taper length, compared to the critical taper length by Love's
15 method.

The exemplary embodiment of the present invention is a large spot size laser, although it will be appreciated that the present invention may be advantageously applied to any semiconductor optical device, and that some such devices, for
20 example an optical amplifier, may require the optically active region to be tapered at both of its ends.

When designing a large spot size laser, a number of, sometimes conflicting, design considerations need to be taken into account. The passive waveguide should have a spot size
25 which is well matched to the spot size of the waveguide into which the laser mode is to be launched, for example an optical fibre or an ASG (arsenic doped silica glass) waveguide. The tapered active region needs to be tapered sufficiently slowly so as not to cause excessive loss, and
30 yet sufficiently rapidly so as to give a device of reasonable length. The theoretical basis of these design considerations will now be discussed, before describing the fabrication of a large spot size laser, and the performance of the resulting device.

35 Referring to Figure 1, the composite waveguide structure comprises an active waveguide 1 and a passive planar waveguide 2. The active waveguide comprises a section

of constant width 3, and a tapered section 4.

Dealing firstly with the design of the passive waveguide 2. The passive guide structure 2 was modelled using a finite difference programme which indicated that a
5 passive guide $0.16\mu\text{m}$ thick by $3.0\mu\text{m}$ wide would give a spot size of $3.8\mu\text{m}$ by $2.6\mu\text{m}$. Where spot size was measured as $1/e^2$ of the guided mode intensity. These results show this structure is a good candidate for the passive guide, since its spot size would be well matched to both cleaved small
10 core fibre and ASG waveguides (which have a spot size of approximately $3.5\mu\text{m}$). The choice available for the material wavelength, and therefore refractive index, of the passive guide 2 is fairly broad. The main consideration is that the material wavelength of the passive guide 2 should be less
15 than that of the active region 1 to ensure it is low loss. Reducing the wavelength and therefore refractive index of the passive guide 2 will allow its thickness to be increased, thus giving a degree of design latitude. The passive waveguide should have a thickness and refractive index which
20 ensure that it remains single-moded at the wavelength of operation, for efficient coupling to single mode optical fibre.

The length of the passive waveguide 2 should be greater than the length of the active waveguide 1, so that
25 after the end of the tapered active waveguide the mode of the composite waveguide is allowed to "settle down" before it reaches the front facet of the device. This is desirable because the spot size of the mode at the point where the tapered region is truncated will in general be smaller than
30 the guided mode supported by the passive region. Therefore once the mode passes from the tapered region into the passive region, having incurred some loss at the interface of said regions, it will slowly expand and evolve into the passive waveguide mode. The length of the passive region required to
35 achieve this is dependant on the design of both the active and passive guides.

It should be understood that although the passive

waveguide is a planar, or slab, waveguide and therefore guides light in essentially two dimensions, its thickness, or width, may nevertheless vary along the length of the composite waveguide.

5 Turning now to the design of the active waveguide 1 and in particular to the length of the tapered section 4, the method employed to calculate the required taper length is an approximation based on Love's method (see J D Love, W M Henry, W J Stewart, R J Black, S Lacroix and F Gonthier,
10 "Tapered Single Mode Fibres and Devices, Part 1: Adiabaticity Criteria", IEE Proc J, 1991, Vol 138, No. 5, pp343-354) of calculating critical taper lengths for optical fibres. The method is derived from the physical argument that the local taper length must be larger than the coupling length between
15 the fundamental mode and the dominant coupling mode if loss is to be small. A local taper angle is defined by $\Omega(z) = \tan^{-1} |dp/dz|$ where z is the distance along the taper, and $p = p(z)$ is the local guide radius. In this approximation the local radius ρ is replaced by the local active half width w . The
20 coupling length between the fundamental and second mode is taken to be the beat length z_b . Where

$$z_b = \frac{2\pi}{\beta_1 - \beta_2}$$

(1)

and β_1 and β_2 are the respective propagation constants.
25 Therefore the local taper angle is given by

$$\Omega = \frac{w(n_1 - n_2)}{2\lambda}$$

(2)

where n_1 and n_2 are the effective indices of the guided modes and in this case n_2 is the substrate index if the guide is
30 designed to be single moded. Integrating Ω over all active widths gives a critical taper length z_c . For taper lengths

$\gg z_c$, the loss will be small and the taper can be assumed to be adiabatic. While for taper lengths $\ll z_c$, there will be significant loss into the substrate.

The critical taper length according to these
5 calculations for different widths of active waveguide 1 are plotted in Figure 2. From this it can be seen that as the active waveguide width is reduced, and particularly as it approaches zero, the taper length required for adiabatic mode expansion increases rapidly. Therefore it is important to
10 assess the loss of the composite waveguide structure if the active width is truncated before it has tapered down to zero width. This truncation loss is calculated by carrying out an overlap integration between the passive waveguide mode and the mode in the tapered waveguide at the specified active
15 width. The field profiles required for these integrals are obtained using a finite difference method. The results of this calculation are plotted in Figure 3 and it can be seen that if the active waveguide width is reduced to $0.3\mu\text{m}$ prior to truncation the single pass loss is $<1\text{dB}$. It should be
20 noted that these loss values assume that the guide taper has been adiabatic up to the point of truncation.

The length of the untapered section 3 of the active waveguide required, depends on the design of the active region, and the length of the taper 4. The length of the
25 untapered section 3 required is reduced as the available gain from the active region is increased, or the length of the tapered section 4 is increased. The amount of gain available from the active region can be increased, for example in a multiquantum well laser, by increasing the number of wells.
30 This has the effect of reducing the device length required for a specified threshold current. Clearly as the length of the tapered section 4 of the active region is increased, the length of untapered section 3 required will reduce, and it should be noted that with very long taper lengths, for
35 example $800\text{m}\mu\text{m}$, an untapered section 3 of the active region may not be required at all.

The fabrication of a large spot size laser will now be

described. The process schedule for the fabrication of the large spot size laser is as follows:-

- 1 Grow planar wafer
- 2 Define first, wide mesa
- 5 3 Define second tapered mesa
- 4 Notch active layer, heat treat to cause material transport and carry out first stage overgrowth of confinement layers
- 5 Remove oxide
- 10 6 Carry out second stage overgrowth
- 7 Define ternary mesa
- 8 Define contact window
- 9 Thin to 90 μm
- 10 Deposit p side metal
- 15 11 Deposit n side metal

With reference to Figure 4, a planar wafer is grown by conventional MOVPE techniques, comprising an n doped InP substrate 5, an n doped InP buffer layer 6, a 1.1 μm quaternary passive waveguide layer 7 which may be either n doped or undoped, an n doped InP spacer layer 8, an active layer 9, and a p doped top InP layer. Further details of these layers are given in Table 1.

TABLE 1

	Layer	Composition	Thickness	Doping
25	Cap	InP	0.2 μm	p5-7e17
	Top SCH	1.3Q	100 $\text{\AA}$	nominally undoped
	MQW active	See below	0.268 μm	nominally undoped
	Bottom SCH	1.3Q	100 $\text{\AA}$	nominally undoped
	Spacer layer	InP	0.2 μm	n 1-2e18
30	Passive guide	1.1Q	0.16 μm	n 1-2e18
	Buffer	InP	3 μm	n 1-2e18
	Substrate	InP	300 μm	n 1-2e18

Where the term SCH refers to a separate confinement heterostructure. The MQW active layer is composed of sixteen 80 $\text{\AA}$ thick InGaAs wells, separated by fifteen 80 $\text{\AA}$ 1.3 Q barriers.

Since the passive waveguide is fairly weakly guiding the doping of the substrate and buffer layers are matched so as to prevent optical energy being launched into substrate modes.

5 Once the planar wafer has been grown by MOVPE, a silica layer is deposited by CVD (Chemical Vapour Deposition) and a mask 11 (shown in Figure 5) is defined by photolithography and etched in a 10% solution of buffered HF. This silica mask 11 defines the final width of the passive
10 planar waveguide 2. The dimensions of the passive waveguide 2 will depend on the waveguiding properties desired, for the large spot size laser described herein the passive waveguide 2 has a constant width of 3 μm , and extends along the whole length of the device. The first, wide mesa is then etched
15 down to the bottom of the active region 9, as shown in Figure 5b. The mesa is first dry etched using 15% methane/hydrogen reactive ion etching (RIE), to a depth that is within 0.1 μm of the base of the active layer 9. The mesa is then wet etched in 3:1:1 (Sulphuric Acid: Hydrogen Peroxide: Water) to
20 the bottom of the active layer 9. This etchant is selective and stops at the top of the InP spacer layer 8. The plan view of the planar wafer, shown in Figure 5c, shows the constant width of this first mesa. A second stage of silica deposition, photolithography and etching is then carried out,
25 to give a tapered mask 12, shown in Figure 5d and e. This mask 12 defines the final width of the active layer 9. The second, tapered, mesa is now etched by employing a dry etch followed by a wet etch, as for the first mesa. The etch details are the same as above. The thickness of the spacer
30 layer 8 and passive guide 7 are equal to or less than the depth to which the mesa is dry etched. This ensures that the passive guide is completely etched through, since the etch rate of 3:1:1 is strongly dependent on the composition of the guide, and reduces as the material wavelength is shortened.
35 In addition to removing material from the top InP layer 10 and the active layer 9 at either side of the mask 12, this etch also removes material from the spacer layer 8 and

passive layer 7 at either side of the first, uniform width, mesa. In this way the terraced structure shown in Figure 6a is formed. Figure 6a shows a schematic cross-section of the device from the direction 18 shown in Figure 1, while Figure 5 6b shows a schematic cross-section of the same device in the direction 19 shown in Figure 1. The tapered end of the mask 12 has been truncated, as can be seen in Figure 5e, and thus at the end 19 of the device shown in Figure 6b, all of the active layer 9 and top InP layer 10 have been etched away.

10 The active layer 9 is then "notched" (shown in Figure 6c) by applying an etchant which attacks only the active layer 9. A suitable etchant comprises sulphuric acid, hydrogen peroxide, and water in the ratio 3:1:1. This "notching" of the active layer 9 is believed to provide a 15 clean, fresh surface on the side of the active layer 9, which benefits the subsequent processing steps.

The whole device is then heated to approximately 700°C for 20 minutes in an over pressure of phosphine in order to cause material transport. This treatment converts the mesa 20 shape from that in Figure 6c to that in 7a, and also covers the edge of the active region with InP.

Optical and electrical confinement layers 13 and 14, shown in Figure 7, are grown to the top of the tapered active mesa 1. The first confinement layer 13 comprises 0.5 μm p 25 type InP at $7-8 \times 10^{17}$, while the second confinement layer 14 comprises 0.4 μm n type InP at $1-2 \times 10^{18}$. These confinement layers 13 and 14 serve to confine the electrical carriers and the photons generated from recombinations of these carriers, to the active layer 9.

30 Finally, the device is overgrown with 1.0 μm p type InP at $7-8 \times 10^{17}$ followed by 1.5 μm of p type InP at $1-2 \times 10^{18}$ which comprises layer 15 and 0.1 μm of p type InGaAs at $>1 \times 10^{19}$ which comprises the contact layer 16.

The contact layer 16 is patterned, a silica mask 17 is 35 deposited, and a contact window is defined in this mask 17 in a conventional manner. The device is completed by depositing p and n side titanium-gold metal contacts. Figure 9 shows a

schematic cross-section of the completed device, from direction 18 in Figure 9a and from direction 19 in Figure 9b.

A number of large spot size lasers have been fabricated, using tapered masks 12 having different taper lengths 4. The taper lengths employed were 60 μm , 180 μm , 400 μm and 800 μm . Two mask taper profiles were used, a linear taper, and a three section approximation to the critical taper length curve shown in Figure 2.

The dimensions of the three section tapers employed are given in Table 2, and Figure 18 shows the three section taper for the 60 μm taper length, together with the 60 μm linear taper profile, and the critical taper length curve for 60 μm .

TABLE 2

15		Taper section lengths in $\mu\text{m}'\text{s}$			
	Active Width in μm	60 μm taper	180 μm taper	400 μm taper	800 μm taper
	1.0-0.6	14	42	92	185
	0.6-0.4	20	60	134	265
20	0.4-0.3	26	78	174	350

The performance of the large spot size lasers is good, the shorter taper length lasers show only a small increase in threshold current when compared to conventional lasers. The threshold currents for different taper length devices as a function of temperature are shown in Figure 10, as are those for a conventional un-tapered laser. All the devices operated to a high temperature i.e. 70°C, as can be seen from Figure 10.

Coupling measurements carried out between these large spot size lasers and cleaved fibres show a significant improvement compared to conventional lasers. Coupling measurements to standard 8-9 μm core optical fibre, are shown in Figure 11, and to small core fibre in Figure 12. The results obtained for standard fibre, show coupling losses

down to 4.5dB for the 800 μ m taper device, which represents a 5 to 6 dB improvement in mean coupling strength over an un-tapered device. It can be seen that the performance of both linear and 3 section taper devices are comparable, and that only a small increase in coupling is obtained as the taper length is increased from 60 to 800 μ m. The modest spot size of this device, increased from ≈ 1 μ m to ≈ 3 μ m ($1/e^2$ of intensity), meant that no improvement in alignment tolerance was observed for tapered devices when compared to un-tapered devices. In order to increase the alignment tolerance to cleaved fibre, the spot size of the device would need to be enlarged much further. However the use of cleaved fibre as opposed to lens ended fibre increases the 3 dB alignment tolerance from ± 1.5 μ m to ± 3.5 μ m.

Better results were obtained for coupling to small core fibre ($1/e^2 \approx 2.0\mu$ m) (as shown in Figure 12) since the laser spot size is better matched to the spot size of this fibre. In this case it can be seen that mean coupling efficiencies of up to -1.5 dB have been obtained. The 3 dB alignment tolerance of the tapered devices to this small core fibre was ± 2.0 μ m

In order to improve the coupling loss between large spot size lasers and optical fibre further, a device with a spot size more closely matched to cleaved standard single mode fibre is required. Design work has been carried out which shows it is feasible to fabricate such a device.

If the laser spot size were increased to ≈ 8 μ m it would closely match the mode size of standard single mode fibre. This could allow losses of 1 dB or less to be obtained when coupling to cleaved standard single mode fibre. One of the first problems encountered is the result of the large spot size. While it is relatively easy to design a passive guide that will give a spot 8 μ m by 8 μ m it is not so easy to fabricate a device with it. Such a structure would require ≈ 8 μ m of InP to be grown over the guide if the field in the vertical axis was not to be distorted. Since the maximum thickness that can be easily regrown is ≈ 5 μ m, this

limits the vertical height to less than this. However there are no such constraints on the horizontal spot size. Therefore a guide of $1.1\text{ }\mu\text{m}$ quaternary $7\text{ }\mu\text{m}$ wide by $0.07\text{ }\mu\text{m}$ thick is chosen as the passive guide, since this gives a spot
5 $8\text{ }\mu\text{m}$ wide by $5\text{ }\mu\text{m}$ high whose index and profile are virtually unaffected by the limited overgrowth thickness. The calculations for this structure were carried out using a variable grid finite element programme, and a contour plot of the E-field for this structure is shown in Figure 13.

10 A 16 well MQW active region is chosen for the upper guide structure. The taper length required was calculated using Love's method and the taper length was found to be virtually identical to that shown in Figure 2. However the single pass loss at the truncation point was found to be much
15 larger, (see Figure 14), than previously calculated due to the greater mode expansion. These results indicated that the active width would need to be reduced to $0.1\text{ }\mu\text{m}$ before truncation if this loss was to be kept sufficiently low. This greatly increases the taper length required, (see Figure
20 15), suggesting that a critical taper length of over $600\text{ }\mu\text{m}$ would be required, greatly increasing device length, and tightening the active width tolerance required. To improve the active width tolerance, the effect of a reduced active thickness was investigated. An eight well strained MQW
25 active region was chosen, since this structure is known to have good high temperature performance. The SCH thickness was reduced to $100\text{ }\text{\AA}$ to minimise active thickness. These changes reduced the active layer thickness from $\approx 0.27\text{ }\mu\text{m}$ for the 16 well to $\approx 0.17\text{ }\mu\text{m}$. These changes reduced the
30 truncation loss as a function of active width, (see Figure 16), allowing the truncation width to be increased to $0.2\text{ }\mu\text{m}$. However the taper length as a function of active width was also increased, (see Figure 17), due to the smaller index difference between the guided and substrate modes. The net
35 effect of this was a small decrease in taper length to $\approx 500\text{ }\mu\text{m}$ for the device. These results show there is a balance point between the size and cost of the laser and the benefits

of improved coupling loss and alignment tolerance.

Although the embodiment of the present invention described comprises a bulk passive waveguide and a MQW active waveguide, it will be appreciated by those skilled in the
5 semiconductor field, that the active waveguide may comprise bulk active semiconductor material and/or the passive waveguide may comprise a MQW or superlattice structure.



CLAIMS

1. A semiconductor optical device comprising a composite optical waveguide having first and second ends, the composite
5 waveguide comprising: -
a first optically waveguiding region of semiconductor material, which first region is optically passive and is substantially planar, and
a second optically waveguiding region of semiconductor
10 material, which second region is optically active and is tapered along a substantial part of the length of the second region, from the first end to the second end of the composite waveguide, in a direction substantially parallel to the plane of the first region,
15 wherein the first and second regions are in optical contact, and the size of the fundamental optical mode supported by the composite waveguide varies along the length of the composite waveguide.
- 20 2. A semiconductor optical device as claimed in claim 1, wherein the first, optically passive region extends beyond the second, optically active region towards the second end of the composite waveguide.
- 25 3. A semiconductor optical device as claimed in claim 1 or claim 2, wherein the length of the first region is greater than the length of the part of the second region which is tapered.
- 30 4. A semiconductor optical device as claimed in any preceding claim, wherein the optically active region is tapered along at least 5% of its length.
5. A semiconductor optical device as claimed in claim 2,
35 wherein the optically active region is tapered along at least 10% of its length.



6. A semiconductor optical device as claimed in any preceding claim, wherein the optically active region is tapered along less than 80% of its length.
- 5 7. A semiconductor optical device as claimed in any one of claims 1 to 4, wherein the optically active region is tapered along substantially the whole of its length.
8. A semiconductor optical device as claimed in any
10 preceding claim, wherein the tapered part of the optically active region is truncated.
9. A semiconductor optical device as claimed in claim 8,
15 wherein the width of the truncated end of the tapered optically active region is at least 0.1 μ m.
10. A semiconductor optical device as claimed in claim 9,
wherein the width of the truncated end of the tapered optically active region is at least 0.3 μ m.
20
11. A semiconductor optical device as claimed in any preceding claim, wherein the optically active region is linearly tapered.
- 25 12. A semiconductor optical device as claimed in any preceding claim, wherein the optically active region is tapered in a direction substantially perpendicular to the plane of the passive region.
- 30 13. A semiconductor optical device as claimed in any preceding claim, wherein the material wavelength of the semiconductor material of the optically active region is greater than the material wavelength of the semiconductor material of the optically passive region.
35
14. A semiconductor optical device as claimed in any preceding claim, wherein the thickness of the passive region



is in the range 0.01 μ m to 0.4 μ m.

15. A semiconductor optical device as claimed in any preceding claim, wherein the optically active region
5 comprises a multi-quantum well structure.

16. A semiconductor optical device as claimed in claim 15, wherein the multi-quantum well structure comprises at least eight quantum wells.

10

17. A method for making a semiconductor optical device, the method comprising the steps of: -

- 15 1) epitaxially growing a planar wafer on a substrate, the wafer comprising an optically active region above an optically passive region;
- 2) defining a first mesa comprising the active region;
- 20 3) forming a mask on the first mesa, the width of the mask being less than the width of said first mesa, the mask width varying along the length of the mask; and
- 25 4) defining a second mesa, of substantially the same width as the first mesa, which second mesa comprises the passive region, and redefining the first mesa to correspond to the mask.

18. A method for making a semiconductor optical device as
30 claimed in claim 17, further comprising the further steps of: -

- 5) reducing the width of the active region by etching with a selective etchant; and
- 35 6) performing a heat treatment sufficient to cause material transport.



19. A method for making a semiconductor optical device as claimed in claim 17 or claim 18, further comprising the steps of: -

- 5 7) performing a first stage overgrowth to form optical and electrical confinement layers along the sides of said first and second mesas; and
- 8) performing a second stage overgrowth over the first and second mesas.

10

20. A method for making a semiconductor optical device as claimed in any one of claims 17 to 19, wherein any one of steps 1), 7) or 8) is carried out using metal organic vapour phase epitaxy.

15

ABSTRACT (FIGURE 1)

A semiconductor optical device, for example a laser, has a composite optical waveguide comprising a tapered, active waveguide 1, in optical contact with a substantially planar, passive waveguide 2. The fundamental optical mode supported by the composite waveguide varies along the length of the composite waveguide so that, in a laser, the laser mode is enlarged and is a better match to single mode optical fibre. A method for making such semiconductor optical devices is also disclosed.

FIGURE 1

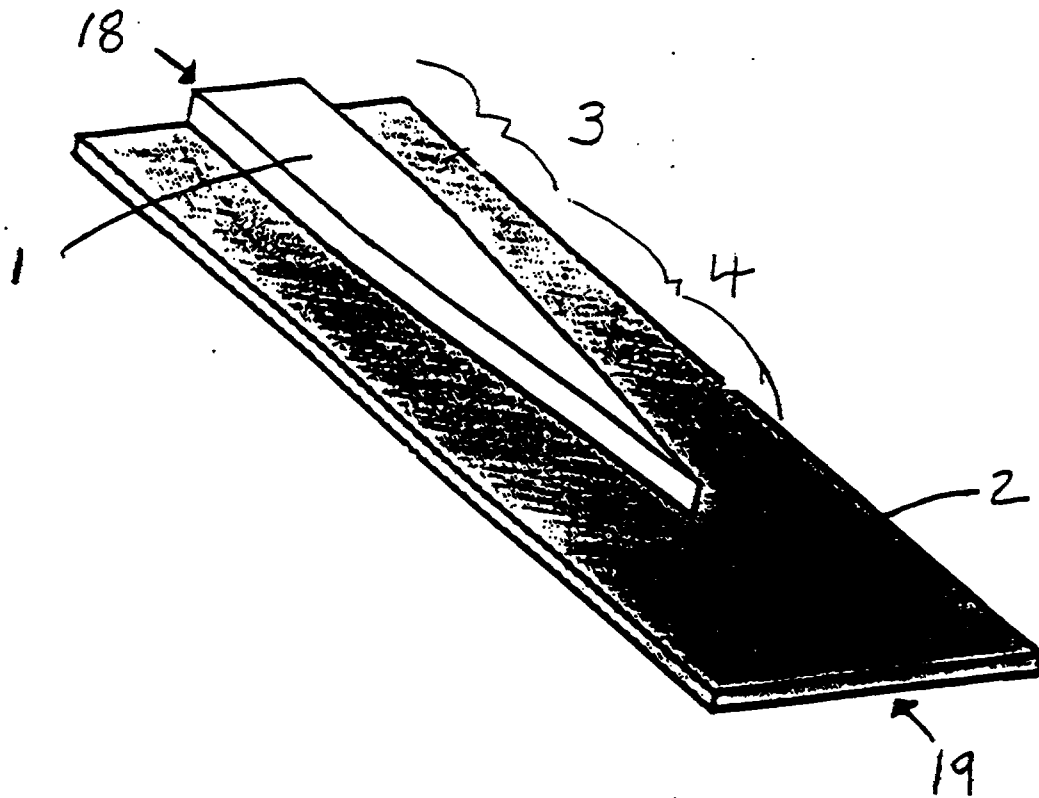


FIGURE 2

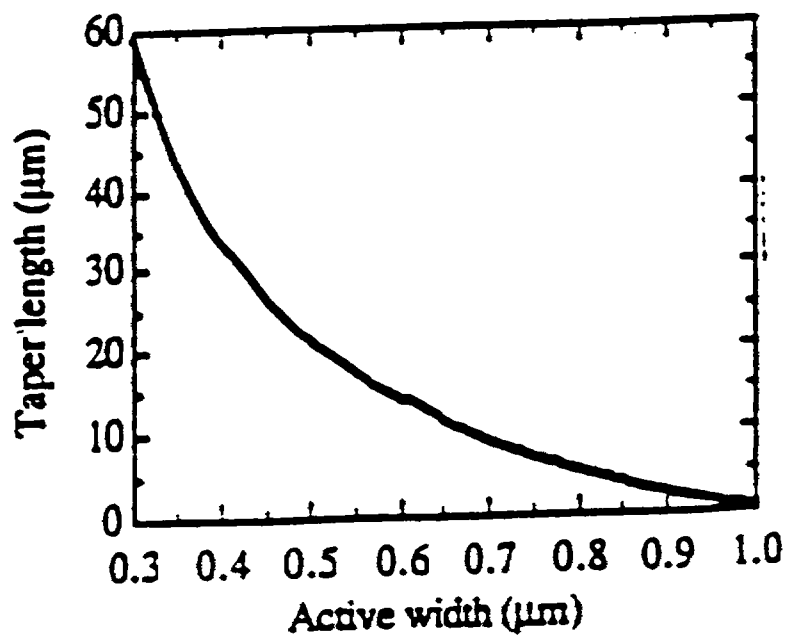


FIGURE 3

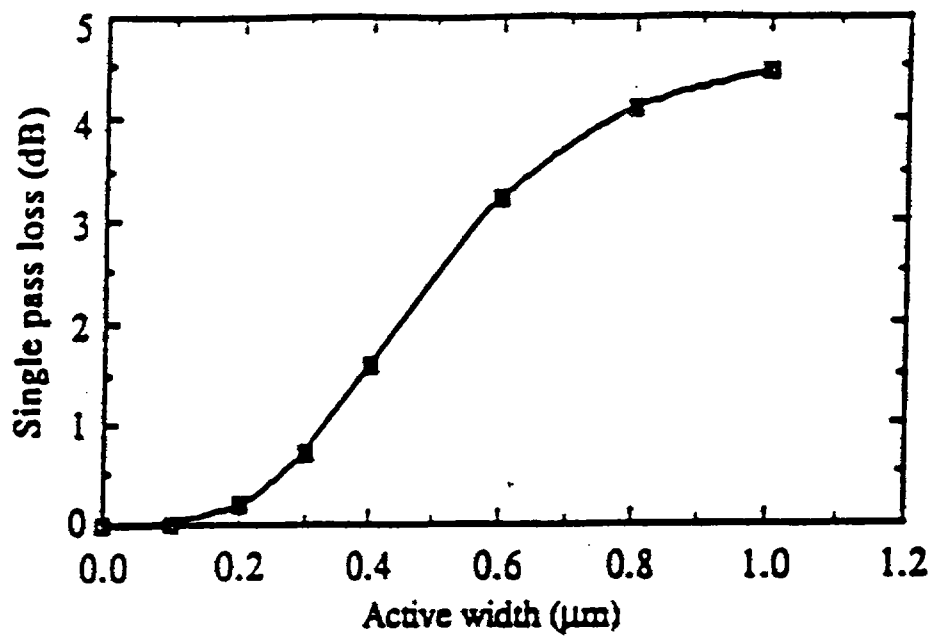


FIGURE 4

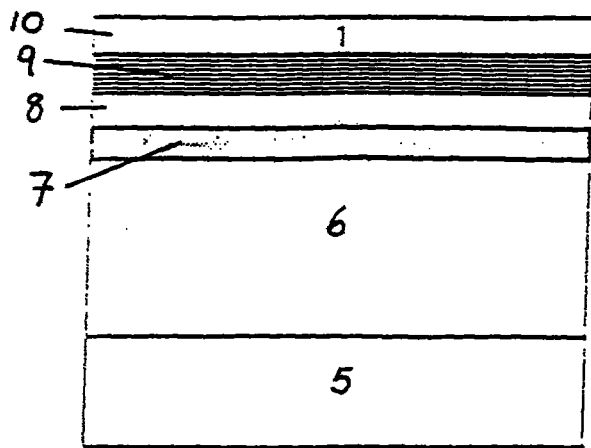
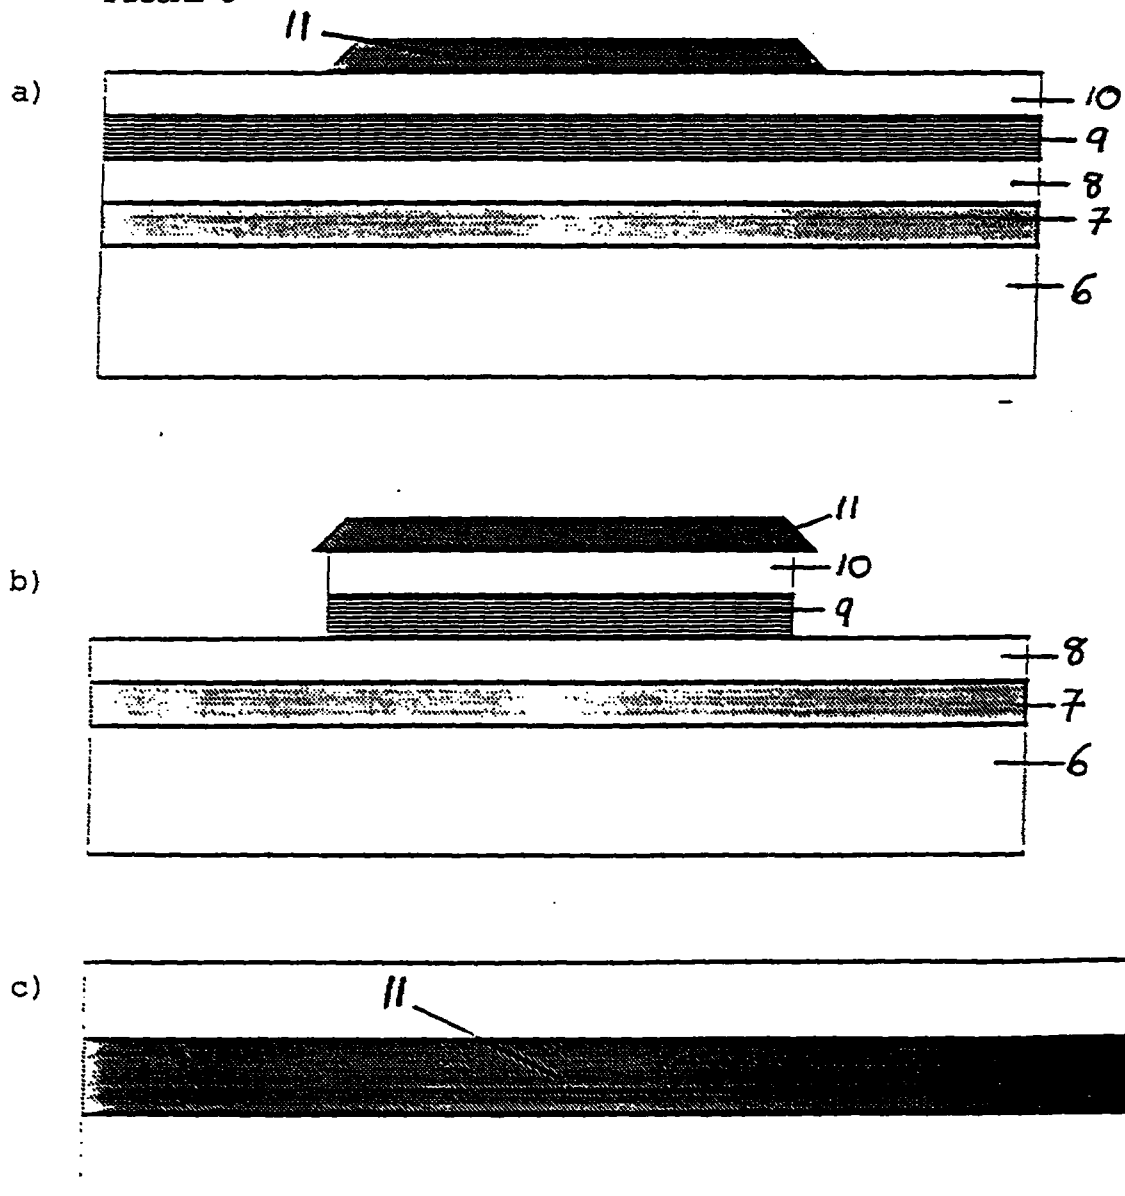


FIGURE 5






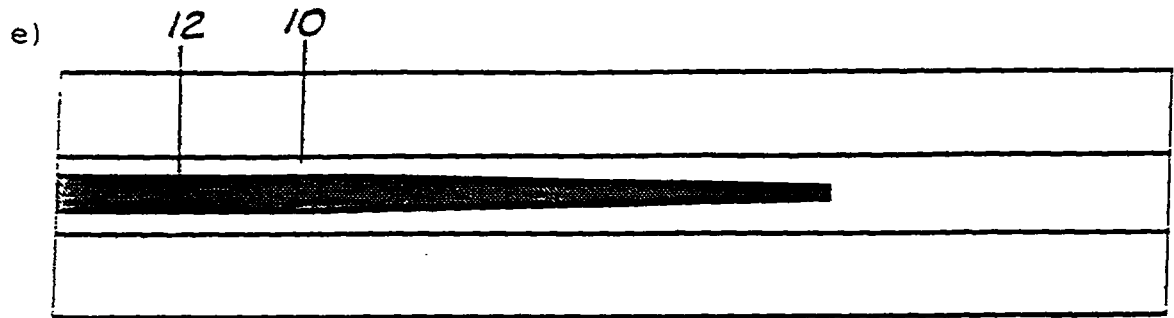


FIGURE 6

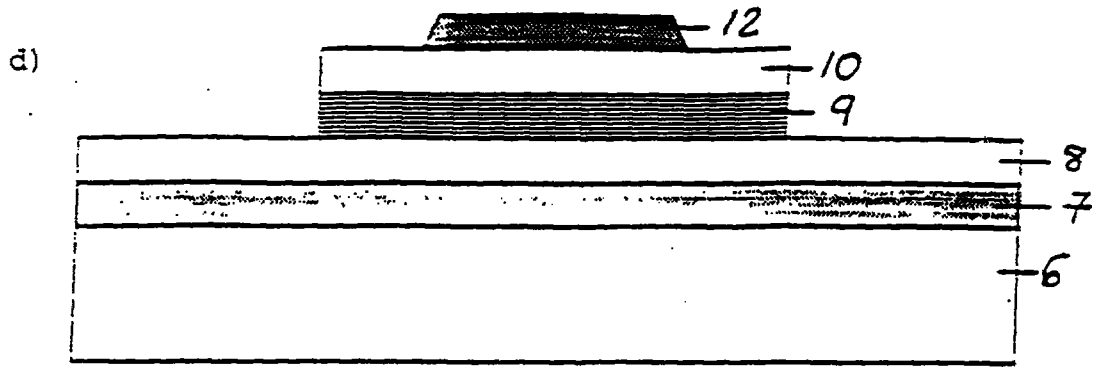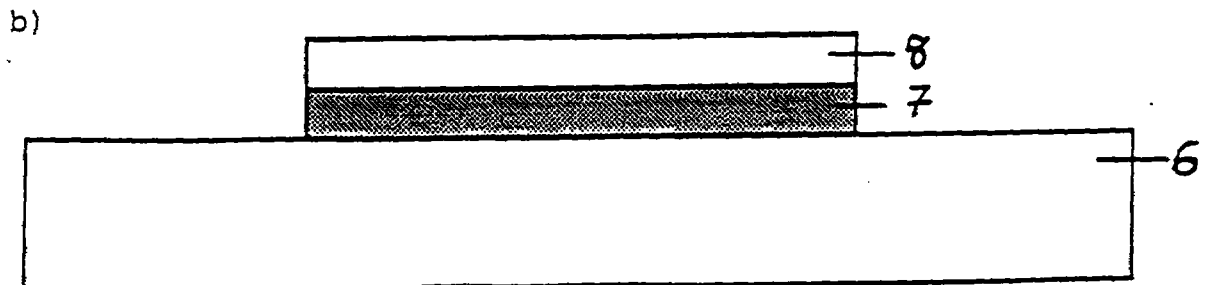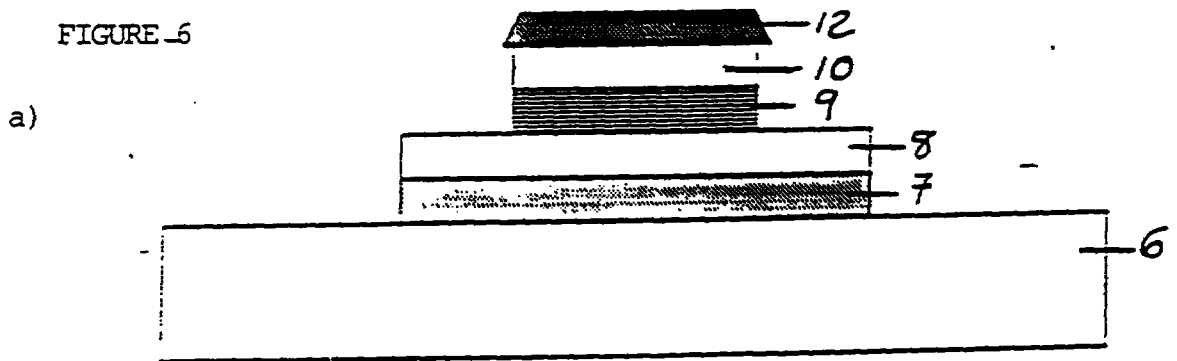

5/12




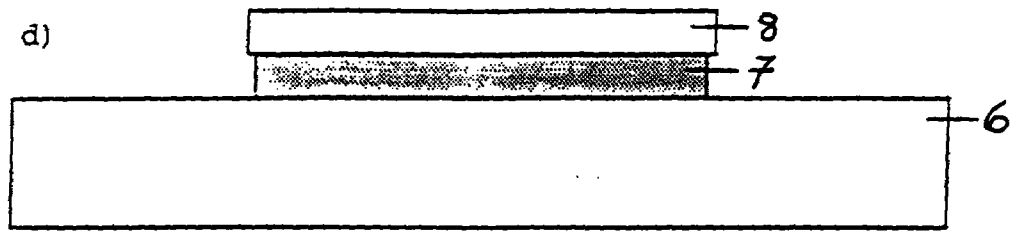


FIGURE 7

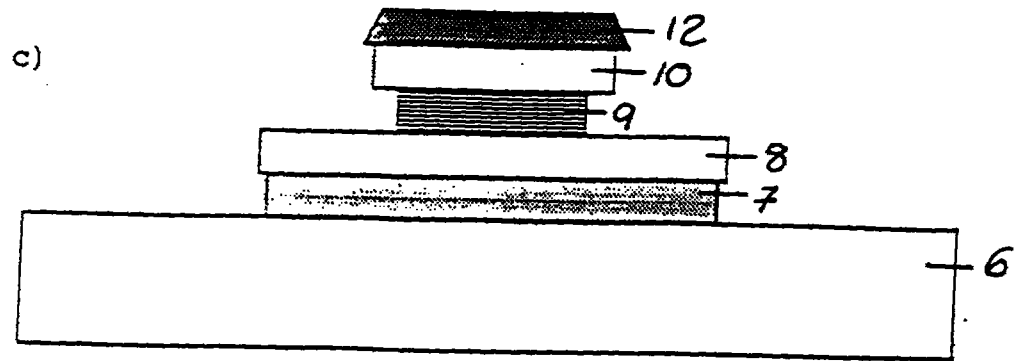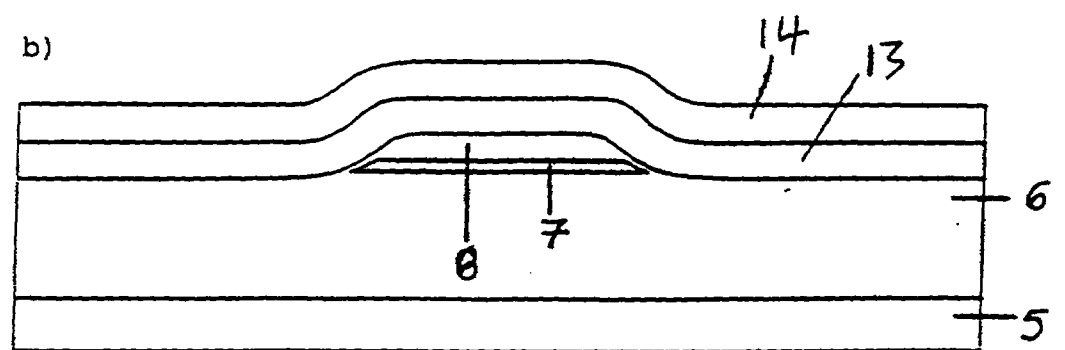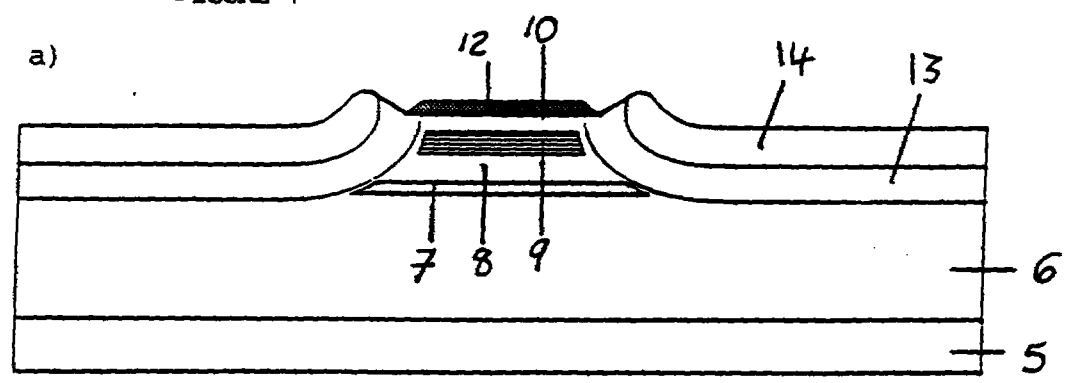

6/12

FIGURE 8



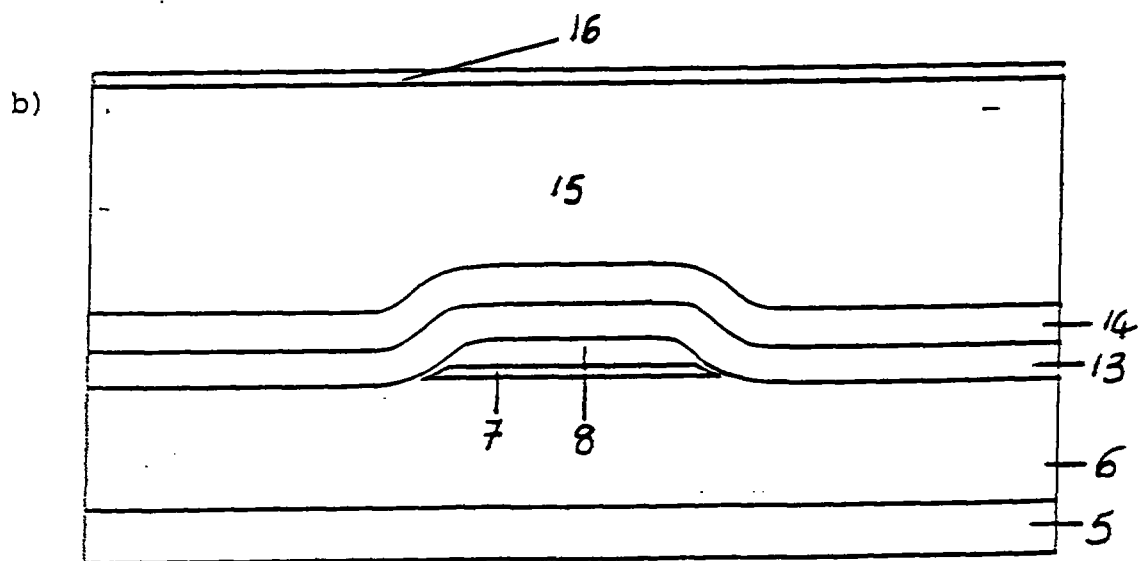



FIGURE 9

7/12

a)

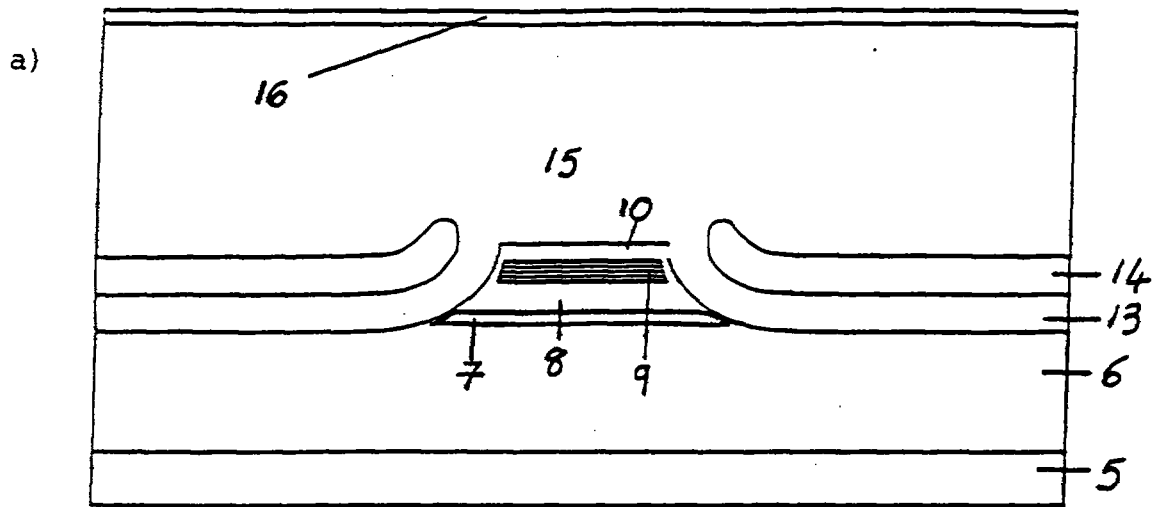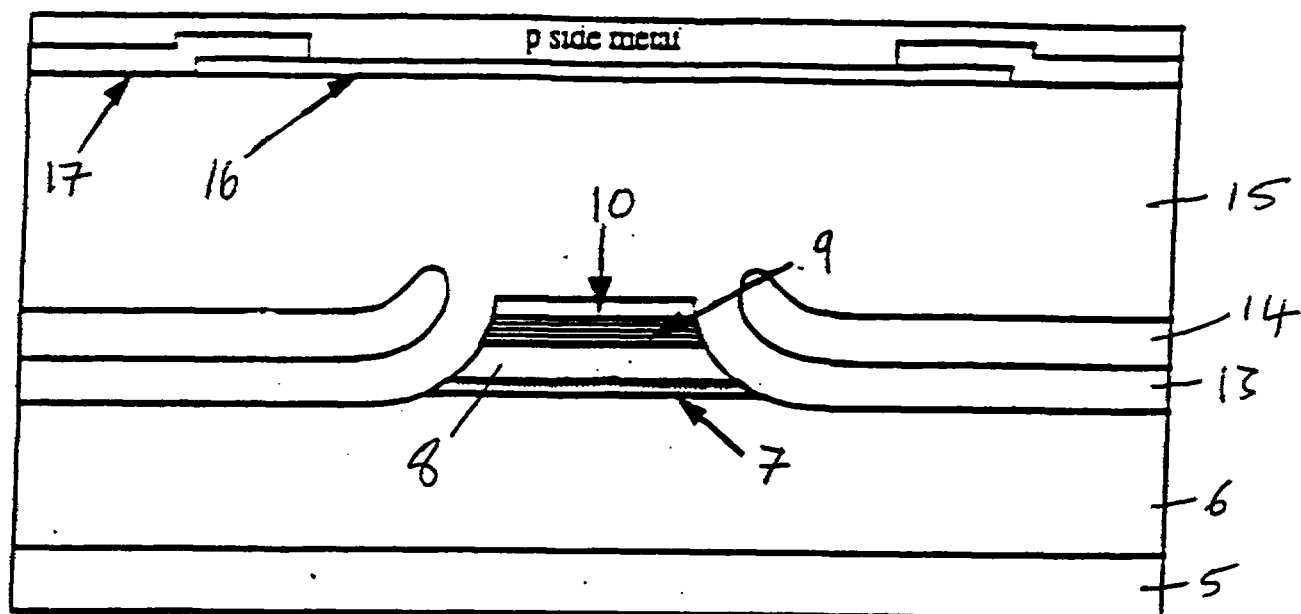

b)

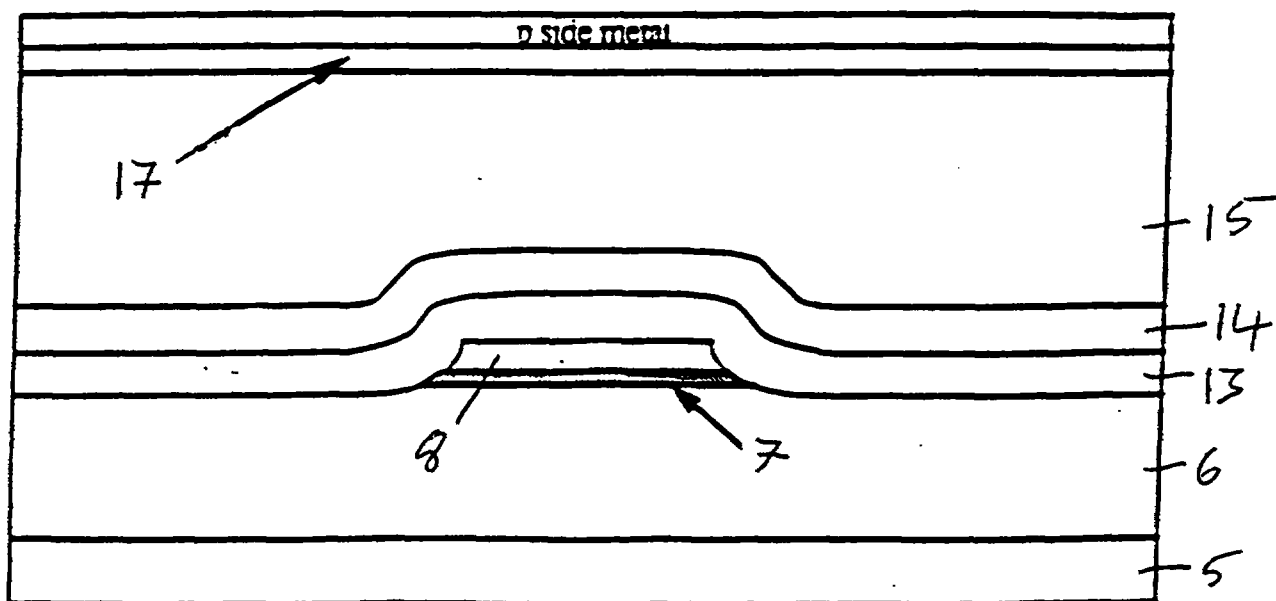

8/12

FIGURE 10


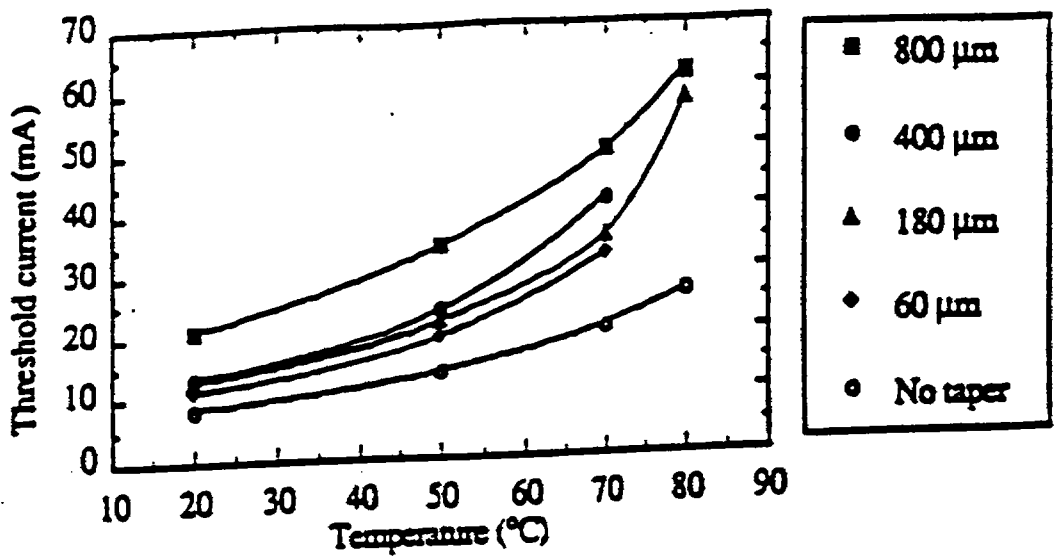


FIGURE 11

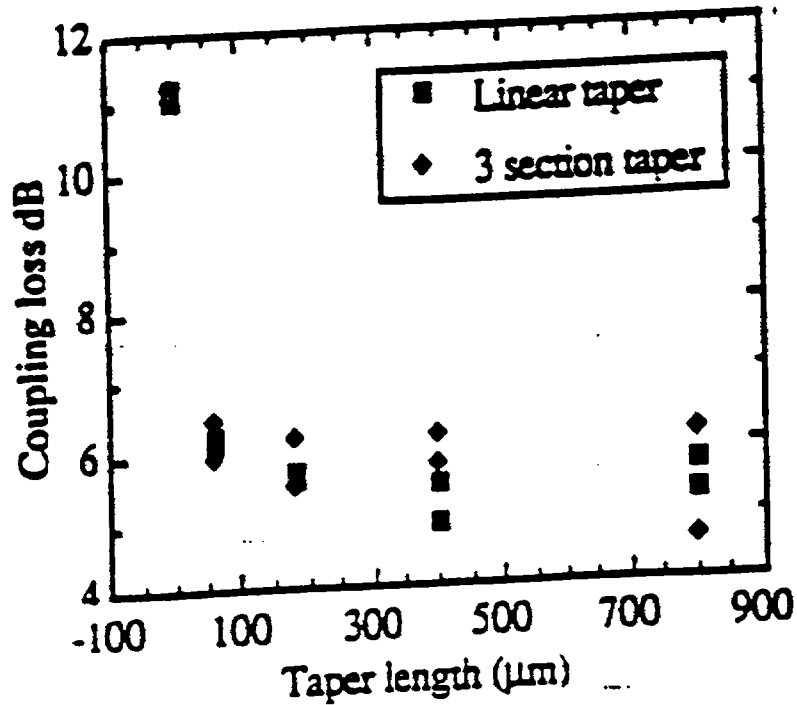

9/12

FIGURE 12


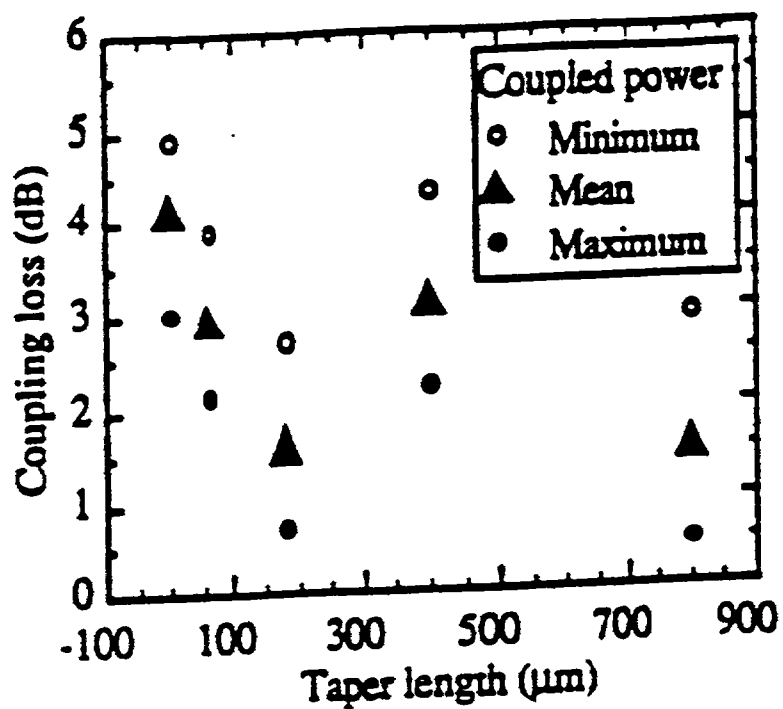


FIGURE 13

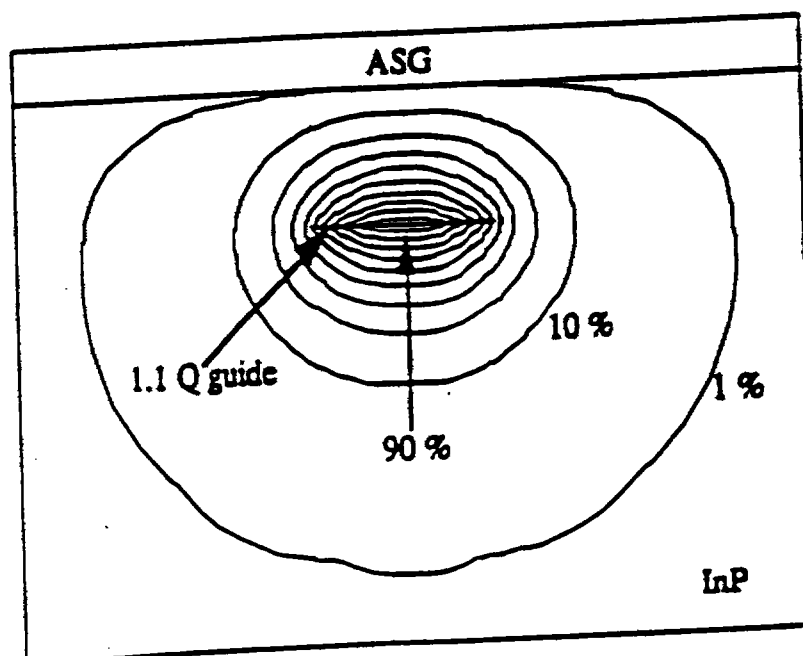

10/12

FIGURE 14


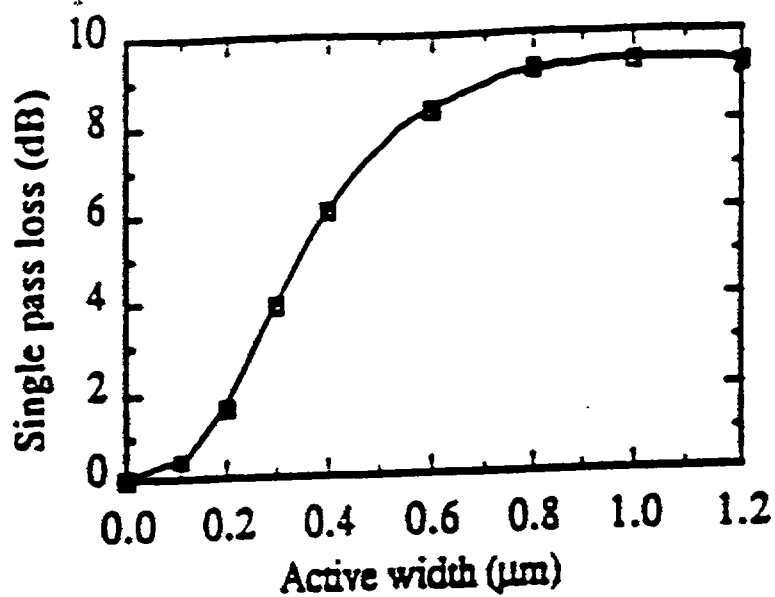


FIGURE 15

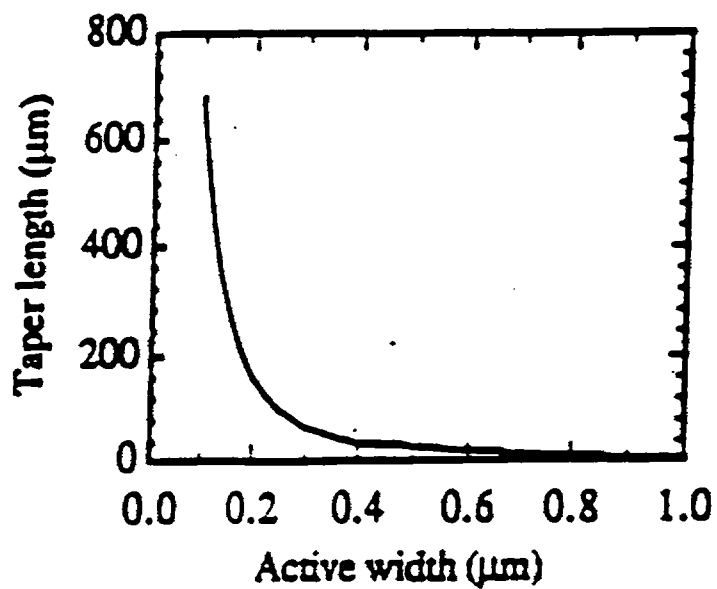

11/12

FIGURE 16



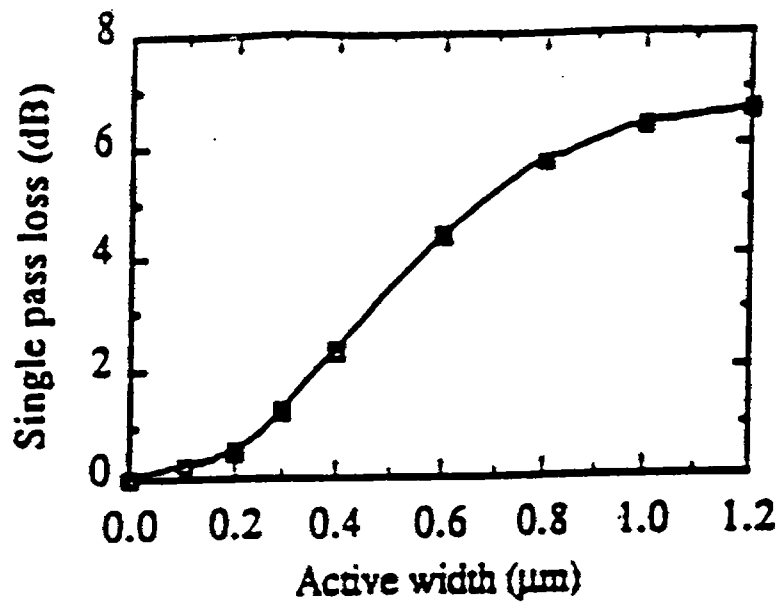


FIGURE 17

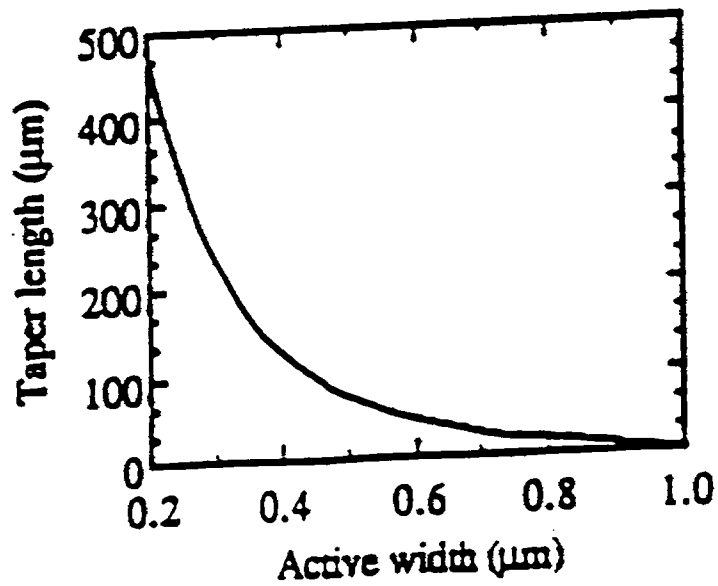

12/12

Figure 18

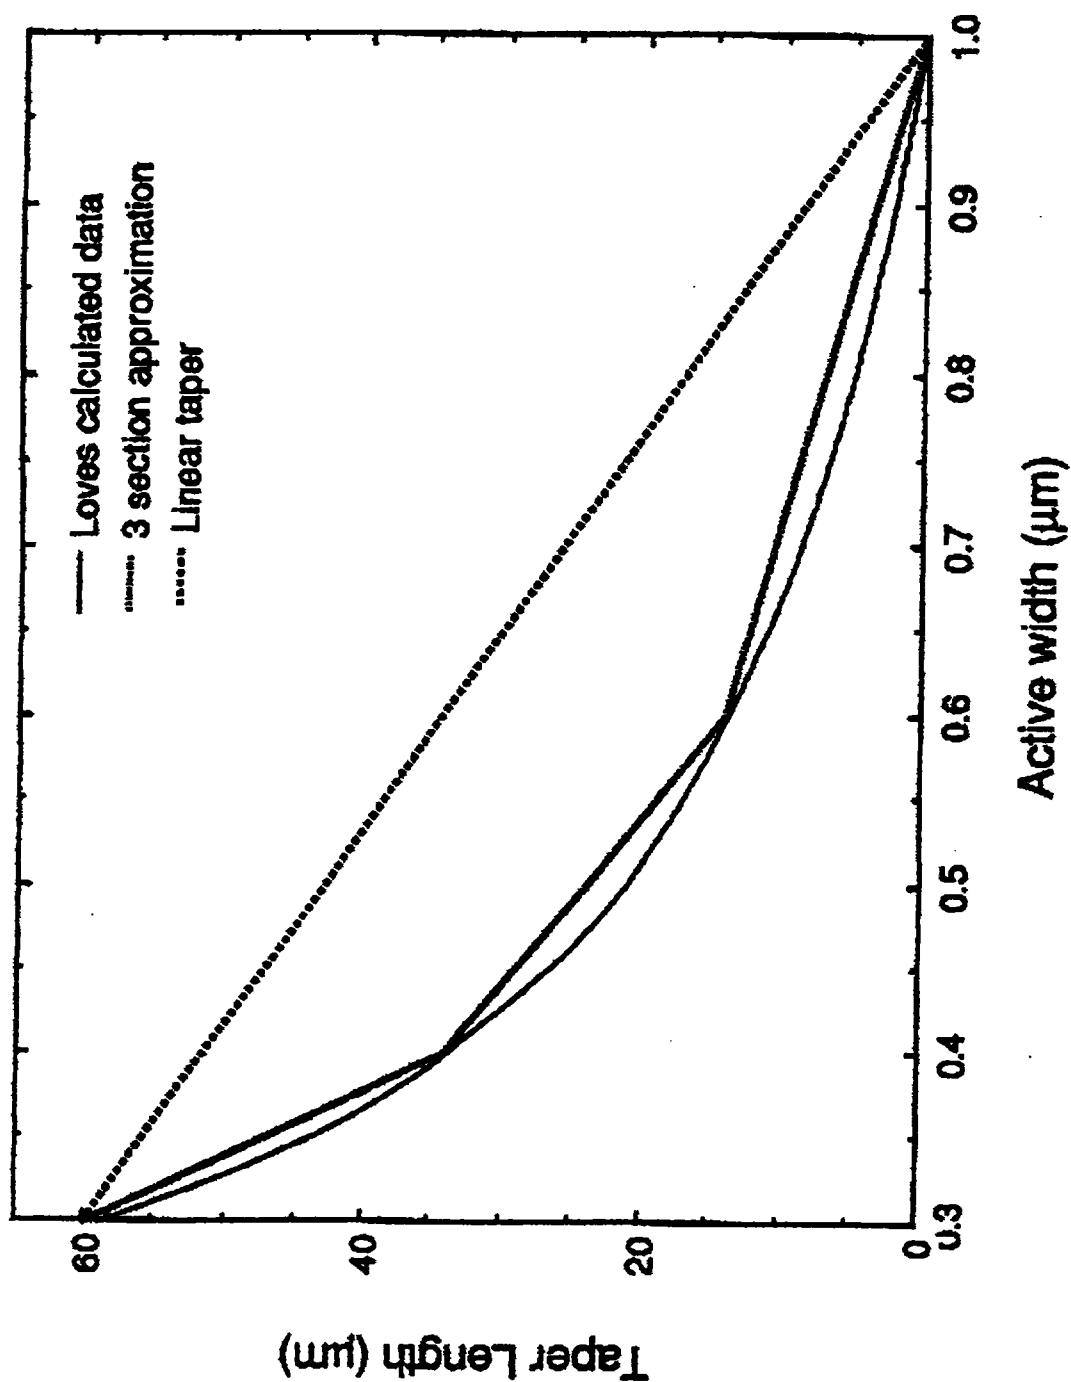

waveguide requires a large number of additional stages of photolithography, and thus considerably increases the complexity and cost of device fabrication.

According to a first aspect of the present invention there is provided a semiconductor optical device comprising a composite optical waveguide having
5 first and second ends, the composite waveguide comprising:-

a first optically waveguiding region of semiconductor material, which first region is optically passive and is substantially planar, and

a second optically waveguiding region of semiconductor material, which second region is optically active, comprises a multi-quantum well structure, and is
10 tapered along a substantial part of the length of the second region, from the first end to the second end of the composite waveguide, in a direction substantially parallel to the plane of the first region,

wherein the first and second regions are in optical contact, and the size of the fundamental optical mode supported by the composite waveguide varies along
15 the length of the composite waveguide and wherein the first region is of substantially constant width along the length of the composite waveguide.

Thus, in contrast to the device disclosed by Koch et al which comprises an active region of uniform cross-section, and a tapered passive region, a device according to the present invention comprises a tapered multi-quantum well active
20 region in optical contact with a passive planar waveguide. This arrangement gives far greater flexibility in the design of active semiconductor optical devices having large output spot sizes. For example, because the multi-quantum well active region is laterally tapered i.e. tapered in a direction parallel to the plane of the passive waveguide, there is greater flexibility in the allowable thickness of the
25 active layer. This multi-quantum well active layer can be chosen to be sufficiently thick that the device has good high temperature performance, without degrading the degree of optical coupling between the active and passive waveguides. This extra degree of flexibility in

AMENDED SHEET



CLAIMS

1. A semiconductor optical device comprising a composite optical waveguide having first and second ends, the composite waveguide comprising:-
 - 5 a first optically waveguiding region of semiconductor material, which first region is optically passive and is substantially planar, and
 - a second optically waveguiding region, of semiconductor material, which second region is optically active, comprises a multi-quantum well structure, and is tapered along a substantial part of the length of the second region, from the first
 - 10 end to the second end of the composite waveguide, in a direction substantially parallel to the plane of the first region,
 - wherein the first and second regions are in optical contact and the size of the fundamental optical mode supported by the composite waveguide varies along the length of the composite waveguide and wherein the first region is of
 - 15 substantially constant width along the length of the composite waveguide.
2. A semiconductor optical device as claimed in claim 1, wherein the first optically passive region is of substantially constant cross section along the length of the composite waveguide.
- 20 3. A semiconductor optical device as claimed in claim 1 or 2, wherein the first optically passive region is of substantially rectangular cross section along the length of the composite waveguide.
- 25 4. A semiconductor optical device as claimed in claim 1, 2 and 3, wherein the multi-quantum well structure comprises at least eight quantum wells.
5. A semiconductor optical device as claimed in claim 1, 2 and 3, wherein the multi-quantum well structure comprises at least sixteen quantum wells.