

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/69097 A3

- (51) International Patent Classification⁷: **F16C 13/00**
- (21) International Application Number: PCT/US01/07078
- (22) International Filing Date: 5 March 2001 (05.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/525,607 14 March 2000 (14.03.2000) US
- (71) Applicant: **THE GATES CORPORATION** [US/US];
900 South Broadway, Denver, CO 80209 (US).
- (72) Inventors: **SERKH, Alexander**; 316 Falling Brook Drive,
Troy, MI 48098-4696 (US). **HODJAT, Yahya**; 410 North
Baldwin, Oxford, MI 48371-3410 (US).
- (74) Agent: **THURNAU, Jeffrey**; The Gates Corporation, Mail
Stop: 31-4-1-A3, 900 S. Broadway, Denver, CO 80209
(US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).
- Published:
--- with international search report
- (88) Date of publication of the international search report:
24 January 2002
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: IDLER PULLEY

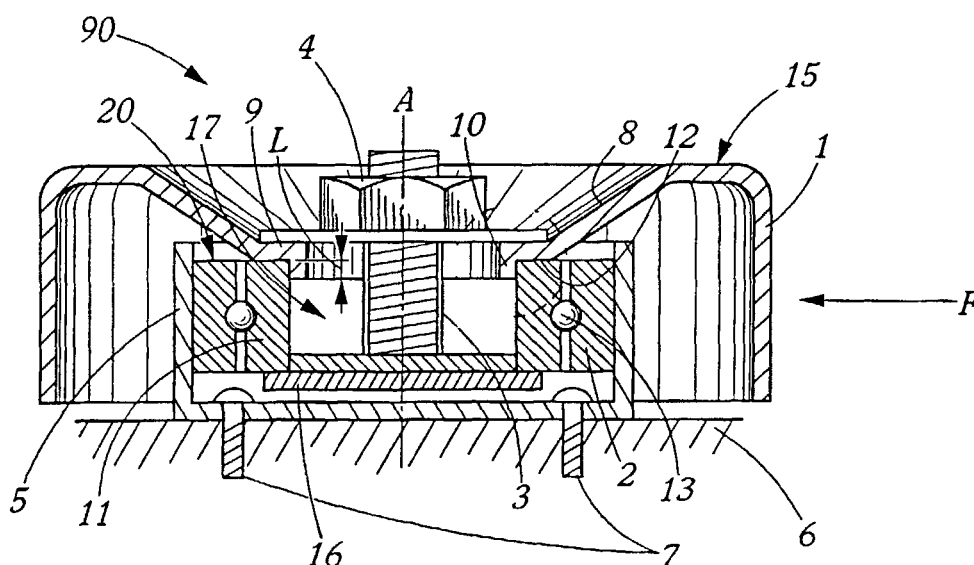

(57) Abstract: The invention comprises an idler pulley, the pulley (90) having a web (8) and a belt bearing surface (1) connected to the web (8). The web (8) is aligned with and affixed to an inner race (11) outer surface (12) of a bearing (20) by a fastener (3). The pulley (90) is stamped, formed or spun out of sheet metal and may have a central hole (17) described by a lip for alignment with a central axis of the bearing (20). The outer race (2) of the bearing (20) may be affixed to a mounting surface (5).



WO 01/69097 A3