



(51) International Patent Classification:
B63B 22/02 (2006.01)

(21) International Application Number:

PCT/EP2009/051952

(22) International Filing Date:

19 February 2009 (19.02.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

08102706.2 18 March 2008 (18.03.2008) EP

(71) Applicant (for all designated States except US): **BLUE-WATER ENERGY SERVICES B.V.** [NL/NL];
Marsstraat 33, NL-2132 HR Hoofddorp (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HOOGEVEEN, Bernardus, Cornelis, Hendrikus** [NL/NL]; Vlierlaan 32,
NL-4844 HK Terhijde (NL).

(74) Agents: **VONCKEN, Bartholomeus, Maria, Christiaan**
et al.; Overschiestraat 180, NL-1062 XK Amsterdam
(NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),

[Continued on next page]

(54) Title: DISCONNECTABLE MOORING ASSEMBLY

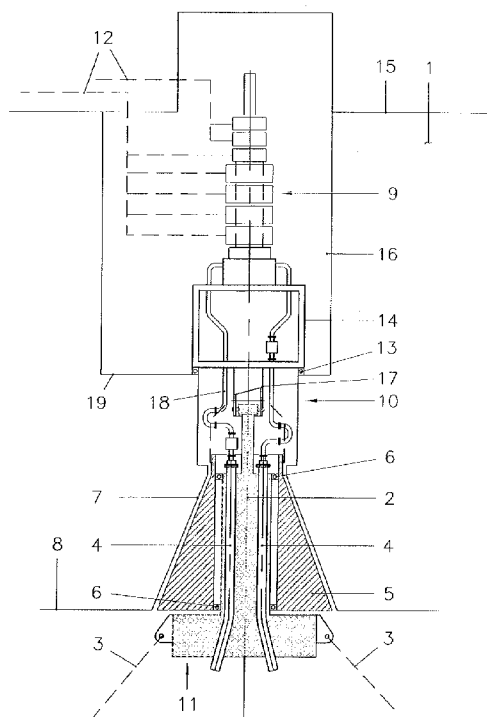


Fig. 1

(57) Abstract: A disconnectable mooring assembly for a vessel (1) comprises a mooring buoy (11) and a swivel positioned above the mooring buoy. The mooring buoy is provided with a central member (2) for being anchored to the seabed and comprises a number of passages each adapted for receiving a riser (4). The mooring buoy further comprises an outer member (5) surrounding the central member and capable of a rotation relative thereto. Said outer member is adapted to be housed in and locked to a corresponding receiving opening of the vessel. The swivel is located above the mooring buoy in such a manner that an interspace is defined between the mooring buoy and the swivel.

WO 2009/115388 A1



OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*