



(43) International Publication Date
22 January 2015 (22.01.2015)

- (51) International Patent Classification:
H04R 1/10 (2006.01)
- (21) International Application Number:
PCT/GB2014/052194
- (22) International Filing Date:
17 July 2014 (17.07.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1312966.3 19 July 2013 (19.07.2013) GB
- (72) Inventor; and
(71) Applicant : LEWIS, Marcus [GB/GB]; Whitfield Court,
Glewstone, Ross-on-Wye, Herefordshire HR9 6AS (GB).
- (74) Agent: MARKS & CLERK LLP; Alpha Tower, Suffolk
Street Queensway, Birmingham B1 1TT (GB).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HEADSET

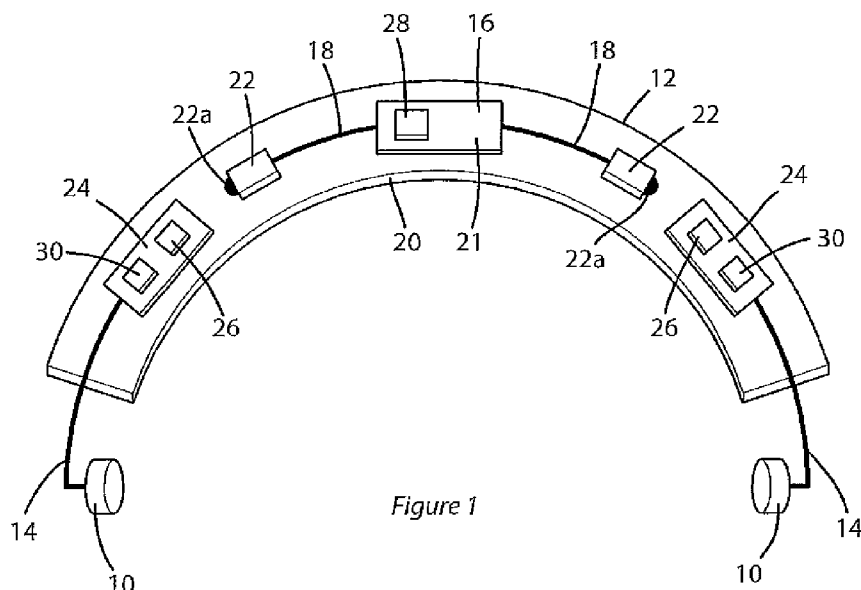


Figure 1

(57) Abstract: A headset comprises a pair of speakers (10) physically interconnected with one another by a mechanical link (12), a wireless receiver device (16) carried by the link (12) and operable to output a respective signal for each of the speakers (10), and optical transmission means (22, 24) whereby each respective signal is transmitted to the associated speaker (10).