

(43) International Publication Date
7 September 2012 (07.09.2012)(51) International Patent Classification:
F16K 27/06 (2006.01) *F16L 23/24* (2006.01)(21) International Application Number:
PCT/US2011/026810(22) International Filing Date:
2 March 2011 (02.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **FMC TECHNOLOGIES, INC.** [US/US]; 1803 Gears Road, Houston, TX 77067 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **WONG, Henry** [US/US]; 6243 Bayou Bridge, Houston, TX 77096 (US). **GARCE, Pablo** [US/US]; 1262 West Pratt Blvd. Apt. #1, Chicago, IL 60626 (US). **LIPEZKER, Sandra** [US/US]; 3335 Krenn Avenue, Highland Park, IL (US). **GONG, Yue** [CN/CN]; Changsu FMC Technologies Energy Equipment Co., Ltd, No. 1, Road Two, Changshu Export Processing Zone, Changshu, Jiangsu 215513 (CN).(74) Agent: **AMERSON, Mike J.**; Williams, Morgan & Amer-
son, P.C., 10333 Richmond, Suite 1100, Houston, TX
77042 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ,
UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: LENGTH-ADJUSTABLE PRESSURE-RETAINING PIPING COMPONENTS

(57) Abstract: Generally, the subject matter disclosed herein relates to length-adjustable pressure- retaining components used in piping systems. In one illustrative embodiment, a device (10) comprising a first pressure component (1) and an adjustable spacer ring (2) operatively coupled to the first pressure component (1) is disclosed, wherein the adjustable spacer ring (2) is adapted to adjust a combined overall length of said the pressure component and the adjustable spacer ring (2).

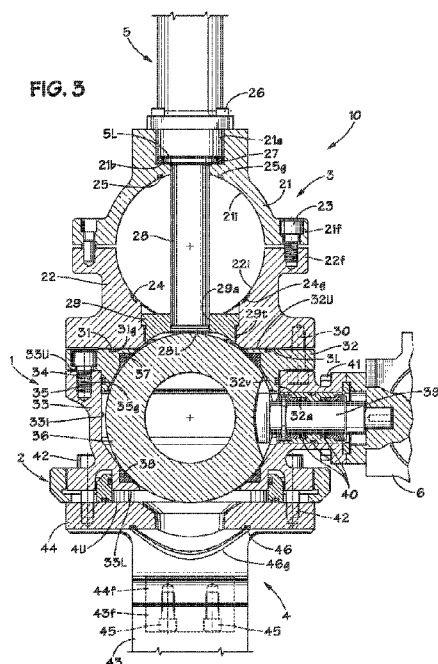



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*