




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B01D 27/08, 46/52, 25/24		A1	(11) International Publication Number: WO 00/50149
			(43) International Publication Date: 31 August 2000 (31.08.00)
(21) International Application Number: PCT/US00/04557		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (Utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 23 February 2000 (23.02.00)			
(30) Priority Data: 09/258,481 26 February 1999 (26.02.99) US 09/502,346 10 February 2000 (10.02.00) US			
(71) Applicant: DONALDSON COMPANY, INC. [US/US]; 1400 West 94th Street, P.O. Box 1299, Minneapolis, MN 55440-1299 (US).			
(72) Inventors: GIESEKE, Steven, S.; 6239 Third Avenue South, Richfield, MN 55423 (US). FINNERTY, Carolyn, J.; 10441 Johnson Avenue South, Bloomington, MN 55437 (US).			
(74) Agent: BRUESS, Steven, C.; Merchant & Gould P.C., 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US).			
 *G00001*		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: SEALING SYSTEM FOR FILTER

(57) Abstract

A filter pack includes a filter construction (100) and a sealing system (60) for sealing the construction within a duct or housing (305). The filter construction has first and second (110) opposite flow faces and is configured for a straight-through flow. The sealing system (60) includes a frame construction (205) and a compressible seal member (250). The compressible seal member is molded around a portion of the frame construction. The compressible seal member (250) is sufficiently compressible to form a radial seal (172) between and against the frame construction (205) and a surface of a housing (305) when the filter pack (100) is inserted within the housing (305).

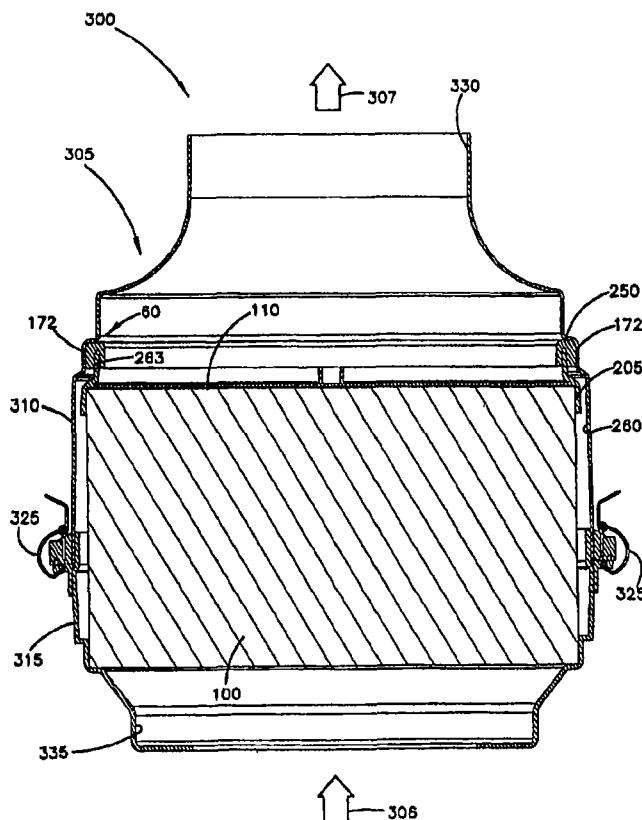

162162