

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2012 年 10 月 4 日 (04.10.2012)



(10) 国际公布号
WO 2012/129732 A1

- (51) 国际专利分类号:
A47L 11/38 (2006.01) B08B 3/04 (2006.01)
B08B 1/04 (2006.01)
- (21) 国际申请号: PCT/CN2011/000559
- (22) 国际申请日: 2011 年 3 月 31 日 (31.03.2011)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (72) 发明人: 及
- (71) 申请人: 廖福彰 (LIAO, Fu-Chang) [CN/CN]; 中国台湾省苗栗县头份镇中华路 1412 巷 50 号, Taiwan (CN)。
- (74) 代理人: 北京科龙寰宇知识产权代理有限公司 (KELONG INTERNATIONAL INTELLECTUAL PROPERTY AGENT LTD.); 中国北京市海淀区知春路 6 号锦秋国际大厦 A 座 13-3, Beijing 100088 (CN)。
- (81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG,

BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW。

- (84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)。

本国际公布:

- 包括国际检索报告 (条约第 21 条(3))。

(54) Title: AUTOMATIC MACHINE FOR CLEANING WALLBOARDS

(54) 发明名称: 墙板自动清洗机

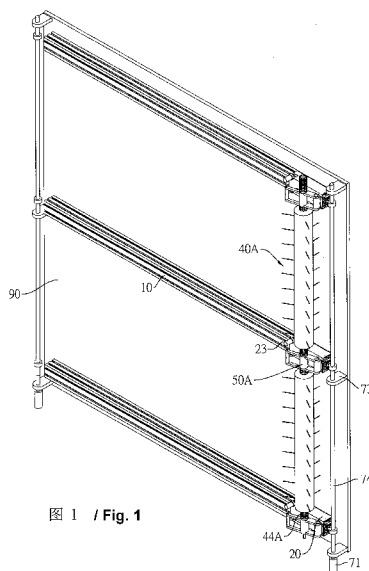


图 1 / Fig. 1

(57) Abstract: An automatic machine for cleaning wallboards, such as the wallboards of wall, glass or solar panels. Pluralities of long axial tracks (10) are arranged parallel in an array. Water guide pipes (11) and electric rails (141) are formed on the long axial tracks (10). The walls of the water guide pipes (11) are provided with a plurality of magnetic valves (30) at intervals. Sliding engine bases (20) are arranged on the long axial tracks (10). The sliding engine bases (20) are provided with conduction frames (213) corresponding to the electric rails (141) and a long axial magnet body (151) which can open and close cleaning water by magnetic force relative to the magnetic valves (30). At least two brush supporting bases (50A) are provided movably on the corresponding sliding engine bases (20) to close to or leave away from the sliding engine bases (20) by a power extending object (54A). A long axial brush (40A) is provided between two nearby brush supporting bases (50A) of the sliding engine bases (20). The setting direction of the long axial brush (40A) is vertical to that of the long axial tracks (10). The long axial brush (40A) is driven by a shaking device (42A) to brush and wash the wallboards. Protective cover plates (60A) are arranged at the outer side of the long axial brush (40A).

[见续页]



WO 2012/129732 A1