



(51) International Patent Classification:

G02B 6/00 (2006.01) **G09G 3/34** (2006.01)
G06F 1/16 (2006.01)

(21) International Application Number:

PCT/CH2011/000288

(22) International Filing Date:

23 November 2011 (23.11.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/418,017 30 November 2010 (30.11.2010) US

(72) Inventors; and

(71) Applicants : **KETTUNEN, Ville** [FI/CH]; Bahnhofstrasse 93, CH-8803 Rüschlikon (CH). **RIEL, Peter** [DE/CH]; Heiniweidstrasse 2d, CH-8806 Bäch (CH). **RUDMANN, Hartmut** [DE/CH]; Rütliwiesstrasse 20, CH-8645 Jona (CH). **ROSSI, Markus** [CH/CH]; Rütliwiesstrasse 24, CH-8645 Jona (CH).

(74) Agent: **FREI PATENTANWALTSBÜRO AG**; Postfach 1771, CH-8032 Zürich (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: OPTICAL LIGHT GUIDE ELEMENT FOR AN ELECTRONIC DEVICE

Fig. 1a

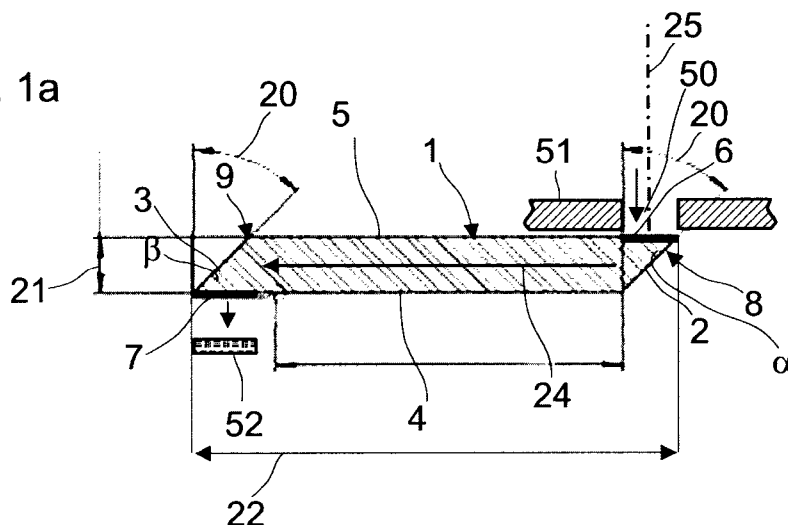

(57) Abstract: The invention relates to an optical light guide element (1) having a first end section (8) with a light entrance area (6) designed for facing a light-transparent opening (50) and having a second end section (9) with a light exit area (7) designed for facing a light sensor (52), wherein the light entrance area (6) is defined by a surface area on the optical light guide element (1) which faces the light-transparent opening (50) and the first end section (8) forms an inclined surface area (2) which has an acute angle with the surface area of the light entrance area (6).