

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number
WO 03/081621 A1

(51) International Patent Classification⁷: **H01H 21/18**,
H01R 13/70

[SG/SG]; c/o N.C.E.ELECTRICAL (S) PTE LTD., Block 1024, Yichun Ind. Park A., #02-31/33, Singapore 768763 (SG).

(21) International Application Number: PCT/SG03/00058

(22) International Filing Date: 26 March 2003 (26.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200201767-1 27 March 2002 (27.03.2002) SG

(71) Applicant (for all designated States except US): **N.C.E. ELECTRICAL (S) PTE LTD** [SG/SG]; Block 1024, Yishun, Park A., #02-31/33, Singapore 768763 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LIM, Cheok Choo**


(74) Agent: **DREW & NAPIER LLC**; 20 Raffles Place,, #17-00, Ocean Towers, Singapore 048620 (SG).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: POWER OUTLET DEVICE

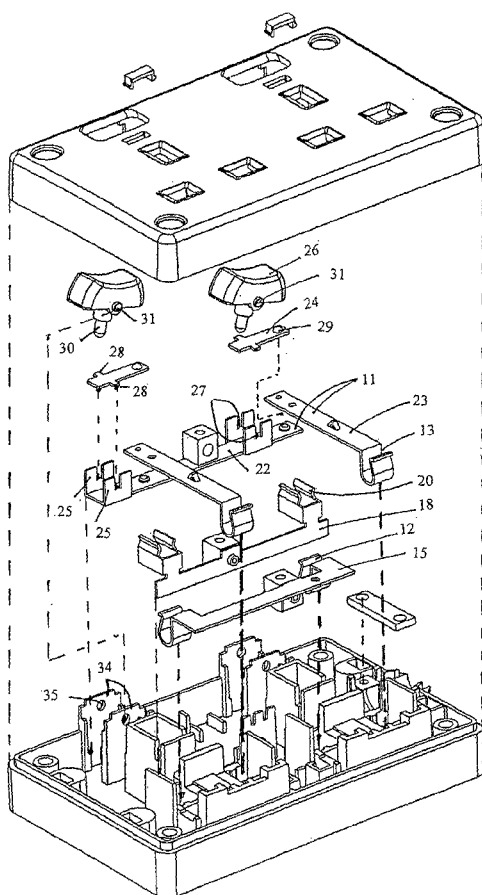

(57) Abstract: A power outlet device having a casing (5) including an upper surface (9) having at least two socket regions, each region having at least two openings for receiving the prongs of a plug, provided inside the casing is a live conductor (11) which includes terminals (13), to be engaged by a live prong of a plug, and a neutral conductor (15) which includes terminals (17) to be engaged by a neutral prong of a plug, the live conductor comprises an elongate feeder electrode bar (22) made of a sheet material and branching electrode bars (23), a switch being located between each branching electrode and the feeder electrode, each switch comprises a conductive toggle plate (24) which is supported by one or more upstands (25) extending from the elongated feeder electrode, the toggle plate pivots under the action of a switch button (26), and the toggle plate pivots about an axis which is transverse direction of the elongated feeder electrode bar.

WO 03/081621 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*