



(51) International Patent Classification:
E21B 10/567 (2006.01) *E21B 10/62* (2006.01)

(21) International Application Number:
PCT/US2011/046820

(22) International Filing Date:
5 August 2011 (05.08.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/371,554 6 August 2010 (06.08.2010) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O.Box 4740, Houston, TX 77210-4740 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LYONS, Nicholas, J.** [US/US]; 808 Pecore Street, Houston, TX 77009 (US).

(74) Agents: **RIDDLE, J., Albert et al.**; Intellectual Property Counsel, Baker Hughes Incorporated, P.O.Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SHAPED CUTTING ELEMENTS FOR EARTH-BORING TOOLS, EARTH-BORING TOOLS INCLUDING SUCH CUTTING ELEMENTS, AND RELATED METHODS

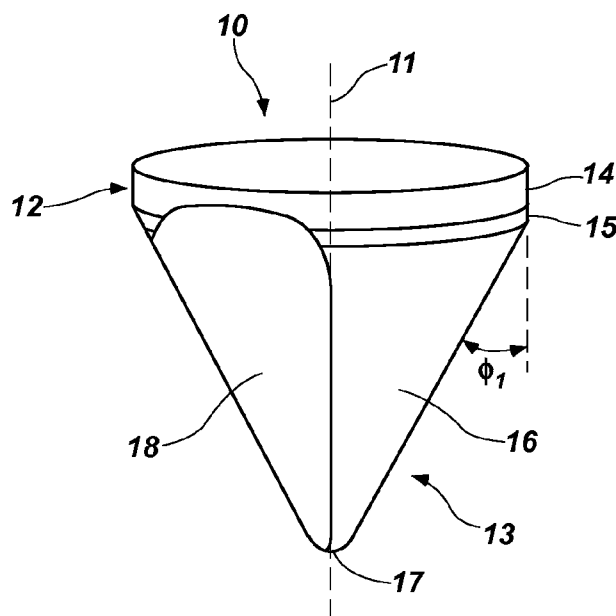


FIG. 2

(57) Abstract: Cutting elements for earth-boring tools include a volume of polycrystalline diamond material on an end of a substrate base. The volume of polycrystalline diamond material comprises a generally conical surface, an apex, and flat cutting surface extending from a first point at least substantially proximate the apex to a second point more proximate a lateral side surface of the substrate base. A method of manufacturing such a cutting element is also disclosed.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*