

"Improved microcapsules and production thereof"

The invention relates to microcapsules whose capsule walls comprise a resin which is obtainable by reacting
5 at least one amine and/or defined aromatics or heteroaromatics and at least one aldehydic component which has at least two C atoms per molecule in the presence of at least one copolymer which comprises units of AMPS and/or AMPP and (meth)acrylates, and also
10 to dispersions comprising such microcapsules. Additionally provided by the invention are the use and the production of the microcapsules/microcapsule dispersions, and also products which comprise such microcapsules/microcapsule dispersions, and the use
15 thereof.

From the prior art, microcapsules are known which may comprise liquid, solid or gaseous substances as core material. Commonplace materials for the capsule walls
20 are, for example, phenol-formaldehyde polymers, melamine-formaldehyde polymers, polyurethane, gelatin, polyamides or polyureas. Widespread, for example, is the use of microcapsules filled with leuco dye for the production of carbonless copy papers.

25 From US 3,755,190 it is known that capsules made of phenol-formaldehyde polymers have fragile walls. In order to avoid this, a production method is described in which fully hydrolyzed polyvinyl alcohol is used.

30 Dispersions of microcapsules made from aminoplast resins, such as melamine-formaldehyde resins, inevitably contain - as a result of their production - a certain fraction of free formaldehyde. For
35 environmental and workplace safety reasons it is

desirable to minimize the formaldehyde content, and if possible to avoid formaldehyde entirely.

For the purpose of reducing the formaldehyde content it is customary to add formaldehyde scavengers to microcapsule dispersions based on melamine-formaldehyde resins. The formaldehyde scavengers most frequently used include ammonia, urea, ethyleneurea, and melamine, which reduce the residual formaldehyde content of the capsule dispersion.

10

EP-A 0 383 358 and DE-A 38 14 250 disclose light-sensitive materials consisting of microcapsules whose walls are formed from melamine-formaldehyde resins. Urea is added in the course of curing, for the purpose of removing excess formaldehyde.

15

In the case of the methods described in EP-A 319 337 and US 4,918,317, urea is added toward the end of curing.

20

EP-A 0 415 273 describes the production and use of monodisperse and polydisperse solid-sphere particles made of melamine-formaldehyde condensate. To bind the formaldehyde released during the condensation, the use of ammonia, urea or ethyleneurea is proposed.

25

Microcapsules made of melamine-formaldehyde resins produced using polymers containing sulfonic acid groups are notable for their uniform capsule size and imperviousness (EP-A 0 218 887 and EP-A 0 026 914). These capsule dispersions, however, still contain residual free formaldehyde, whose presence is unwanted during further processing.

30

EP-A 0 026 914 therefore recommends binding the formaldehyde, following curing, using ethyleneurea and/or melamine as formaldehyde scavengers.

35

Known from DE 198 35 114 are dispersions of microcapsules based on melamine-formaldehyde resin, the melamine-formaldehyde resin being partially etherified and comprising a water-soluble primary, secondary or
5 tertiary amine or ammonia. Prior to curing, urea is added as a formaldehyde scavenger.

DE 198 33 347 describes a method for producing microcapsules by condensation of melamine-formaldehyde
10 resins and/or their methyl ethers, where urea or urea whose amino groups are joined with an ethylene or propylene bridge is added as a formaldehyde scavenger prior to curing. The resulting dispersions are indeed low in formaldehyde, but the addition of urea prior to
15 curing adversely affects the stability of the microcapsules and the viscosity of the microcapsule dispersion.

WO 01/51197 teaches a method for producing
20 microcapsules by condensation of melamine-formaldehyde resins, where a mixture of melamine and urea is added in the course of curing.

The addition of the stated formaldehyde scavengers to
25 the completed microcapsule dispersion or during the production of the microcapsule dispersion generally lowers the formaldehyde content of the dispersion. Often, however, it is not possible to reduce below a defined limit the formaldehyde content of products
30 which comprise such microcapsule dispersions or have been treated with such microcapsule dispersions, even when large amounts of formaldehyde scavengers are added.

35 It is an object of the present invention, therefore, to develop microcapsules having an extremely low formaldehyde content and/or, preferably, to forgo entirely the use of formaldehyde for microcapsules.

This object is achieved by the microcapsules of the invention, whose capsule walls comprise a resin which is obtainable by reacting

- 5 a) at least one compound selected from the group of
- a1) amines and
- a2) aromatic or heteroaromatic compounds which are unsubstituted or substituted by one or more substituents from group C₁-C₂₀ alkyl, OH, OR, COOH, SH, SR, NHCOR, OCOR, halogen
- 10 (F, Cl, Br, I), C₆-C₁₄ aryl such as unsubstituted or substituted phenyl or naphthyl (in each case for example substituted by C₁-C₁₀ alkyl, C₁-C₁₀ alkoxy, halogen, halo-C₁-C₁₀ alkyl, or halo-C₁-C₁₀ alkoxy), where R represents a C₁-C₁₀ alkyl group,
- 15 with
- b) at least one aldehydic component which has at least two C atoms per molecule, in the presence
- 20 c) of at least one copolymer which comprises units of 2-acrylamido-2-methylpropanesulfonic acid or its salts (AMPS) and/or 2-acrylamido-2-methylpropanephosphonic acid or its salts (AMPP) and units of one or more
- 25 (meth)acrylates.

The invention further relates to microcapsule dispersions comprising such microcapsules of the

30 invention.

Surprisingly it is possible in accordance with the invention to produce stable core-shell microcapsules featuring high chemical and physical resistance, which

35 satisfy the requirements and feasibility of industrial manufacture (scale-up).

In this context it is possible to produce in situ, from the building blocks a) and b), precondensates which can

also be used further directly in a one-pot process to give oil-in-water or water-in-oil microencapsulations.

The invention further provides a method for producing microcapsules and microcapsule dispersions of the invention, wherein a) at least one compound selected from the group of the amines a1) and/or the aromatic or heteroaromatic compounds a2) such as aromatic or heteroaromatic alcohols (or ethers or derivatives thereof) and/or aromatic or heteroaromatic carboxylic acids (or esters thereof) and b) the at least one aldehydic component which has at least two C atoms per molecule, are combined and reacted in the presence c) of at least one copolymer which comprises units of AMPS and/or AMPP and one or more (meth)acrylates, and later the curing of the capsules takes place.

The production of such microcapsule dispersions is achieved via the use of suitable precondensates but also in situ in a one-pot process.

In the definition of component a), the aromatic or heteroaromatic compounds a2) are different from amines; the compounds a2) therefore do not include amines a1). As component a), it is possible to use one or more (e.g., two, three or four) compounds, preferably one compound, from the groups a1) and/or a2). There may be, for example, one or more (e.g., two, three or four) amines a1) or one or more (e.g., two, three or four) aromatic or heteroaromatic compounds a2). Preferred compounds a2) are aromatic or heteroaromatic alcohols (or their ethers and esters) and/or one or more (e.g., two, three or four) aromatic or heteroaromatic carboxylic acids (or their esters); particularly preferred compounds a2) are aromatic alcohols (or their ethers and esters).

If two or more (e.g., two, three or four) compounds a) are used, it is possible to use two or more compounds

a1), two or more compounds a2), or two or more compounds from different subgroups a1) or a2), as for example one or more (e.g., two) compounds a1), one or more (e.g., two) compounds a2), or one or more (e.g., two) compounds a1) and one or more (e.g., two) compounds a2), as for example an amine and an aromatic alcohol such as urea-resorcinol, urea-phloroglucinol, melamine-resorcinol or melamine-phloroglucinol. Hence the present invention opens up a multiplicity of thermoset-based wall materials which are formaldehyde-free and can be tailored specifically to the particular profiles of requirements of the industrial application.

As component a) it is preferred to use just one compound, preferably an amine a1) or an aromatic or heteroaromatic compound a2) such as an aromatic alcohol.

Particularly preferred as component a) are the amines a1), optionally in combination with compounds a2).

Amines a1) used in the context of the present invention are, for example, acyclic, aromatic or heteroaromatic, preferably acyclic or heteroaromatic, amines. The amines may have one or more amine groups. The amines preferably have two or more amine groups, more particularly two or three amine groups. Further preferred are amines having at least one amine function which has at least one hydrogen atom. Primary and secondary amines are preferred. Particularly preferred are amines having two or three amino functions which constitute primary or secondary amine functions. Especially preferred are amines which have two or three primary amino functions. Further preferred are amines which form Schiff bases, imines or enamines in the reaction with aldehydes b).

The following compounds, for example, are contemplated as amines a1) in accordance with the invention:

C₁-C₂₀ alkylamines such as 1,2-diaminohexane, 1,3-diaminohexane, 1,2-diaminodecane, 1,3,5-triaminoeicosane,
 ureas such as urea, methylurea, dimethylurea,
 5 methylolureas, which may be partly or wholly etherified or esterified, such as methylolurea, dimethylolurea and di(methylmethylol)urea,
 thioureas such as thiourea, methylthiourea, dimethylthiourea, methylolthioureas, which may be
 10 partly or wholly etherified or esterified, such as methylolthiourea, dimethylolthiourea, and di(methylmethylol)thiourea,
 triazines such as melamines, e.g., melamine, methylolmelamines, which may be partly or wholly
 15 etherified or esterified, such as hexamethylolmelamine or methylated hexamethylolmelamine,
 imino-melamines, e.g., iminomelamine,
 guanidines, e.g., guanidine; benzylguanidine and guanidine carbonate,
 20 guanines, e.g., guanine,
 uracils, e.g., uracil,
 thymines, e.g., thymine,
 cytosines, e.g., cytosine,
 adenines, e.g., adenine,
 25 benzoguanamines, e.g., benzoguanamine, acetoguanamine, benzotriazoles, e.g., benzotriazole,
 glycourils, e.g., glycouril,
 indoles, e.g., indole and indoles substituted by primary or secondary amine groups,
 30 pyrrols, e.g., pyrrole and pyrroles substituted by primary or secondary amine groups,
 pyridines, e.g., pyridine and pyridines substituted by primary or secondary amine groups,
 pyrimidines, e.g., pyrimidine, and pyrimidines
 35 substituted by primary or secondary amine groups, such as alpha-aminopyrimidine,
 pyrazines, e.g., pyrazine and pyrazines substituted by primary or secondary amine groups,

quinolines, e.g., quinoline and quinolines substituted by primary or secondary amine groups.

The aforementioned aromatic or heteroaromatic amines
5 may also carry additionally the following substituents, for example, as well as amino functions, on the cyclic parent structure: C₁-C₂₀ alkyl, OH, OR, SH, SR, COOH, NHCOR, OCOR, SO₃H, PO₃H, halogen (F, Cl, Br, I), C₆-C₁₄ aryl such as unsubstituted or substituted phenyl or
10 naphthyl (e.g., substituted by C₁-C₁₀ alkyl, C₁-C₁₀ alkoxy, halogen, halo-C₁-C₁₀ alkyl or halo-C₁-C₁₀ alkoxy), where R represents a C₁-C₂₀ alkyl group and the groups OH, SH, COOH, SO₃H, and PO₃H may also be present in the form of their salts.

15 In the reaction of amine component and aldehydes, the molar ratio between nitrogen-bonded hydrogen atoms and aldehyde functions is generally between 0.01 and 1:1, preferably between 0.2 and 1:1. Through a suitable
20 choice of the reactivities of the components employed, the reaction products afford the possibility of custom-tailoring the rate of formation of the wall material needed for forming the capsule wall, the network density, the wall thickness, and the nature of the
25 thermoset wall material to the requirements.

Preferred components a1) are ureas, melamines, and benzoguanamines and mixtures thereof. Particularly preferred components a1) are urea, melamine, and
30 benzoguanamine, and mixtures thereof, very preferably urea, melamine, and urea/melamine.

The amino resin condensates are produced in accordance with the techniques customary for the production of
35 aminoplast condensates. Reaction of aldehydes b) with a1) components produces polycondensates which have OH groups in alpha-position to amine moieties.

The appropriate reaction temperature for producing the amino resin products from amine a1) and aldehyde is generally between 20°C and 90°C, preferably between 40°C and 60°C, at pH levels in general between 2 and 10.

The reaction can be carried out in aqueous phase or in organic phase. Suitable solvents are water, alcohols, aromatic or aliphatic hydrocarbons such as mineral oils, for example, myristates, etc. Reaction in aqueous phase is particularly preferred.

Also suitable as component a) are aromatic and heteroaromatic compounds a2). These compounds are able to enter into an electrophilic reaction with the aldehyde component, and subsequently allow polycondensation reactions.

Examples of aromatic and heteroaromatic compounds a2) are unsubstituted aromatic and heteroaromatic compounds such as indene, benzene, and toluene.

Compounds a2) of preferential suitability are substituted aromatic and heteroaromatic compounds.

Preferred in this context are aryloxyalkanols, arylalkanols, and oligoalkanol aryl ethers; also suitable are compounds which provide electron-rich double bonds, examples being enol ethers or enamine systems such as benzofuran, furan, and pyran.

Particularly preferred compounds a2) are aromatic alcohols and ethers thereof or derivatives thereof, preferred derivatives being esters.

Especially preferred are aromatic and heteroaromatic, preferably aromatic, compounds in which at least one free hydroxyl group or carboxylic acid group, more preferably at least two free hydroxyl or carboxylic

acid groups, are bonded directly on the aromatic or heteroaromatic ring. It is particularly preferred in this case if at least two free hydroxyl groups or carboxylic acid groups are bonded directly to an aromatic ring, and very preferably are located in meta-
5 position to one another. It is further preferred for the aromatic alcohols and carboxylic acids to be selected from phenols, cresols (o-, m-, and p-cresol), naphthols (α - and β -naphthol), and thymol, and also
10 from ethylphenols, propylphenols, fluorophenols, and methoxyphenols, and also trimesic acid and its esters, gallic acid and its esters, terephthalic acid and its esters, phthalic acid and its esters, and phthalic anhydride, and also mixtures thereof. The alcohols and
15 carboxylic acids may also be present in the form of their salts, as alkoxide or carboxylate, respectively.

Aromatic alcohols preferred in accordance with the invention are also those which are used in the
20 production of polycarbonate plastics (e.g., for compact discs, plastic dishes, baby bottles) and epoxy resin varnishes (e.g., for coatings on preserve cans and film packaging), more particularly 2,2-bis(4-hydroxyphenyl)propane (bisphenol A).

25 It is especially preferred if an aromatic alcohol is selected from the phenols having two or more hydroxyl groups, preferably from 2,2-bis(4-hydroxyphenyl)propane (bisphenol A), pyrocatechol, resorcinol, hydroquinone
30 and 1,4-naphthohydroquinone, phloroglucinol, pyrogallol, and hydroxyhydroquinone, with resorcinol and/or phloroglucinol more particularly being preferred as aromatic alcohols.

35 In one embodiment, the microcapsules of the invention are obtained by using the aromatic alcohol in the form of an ether, the ether, in one preferred embodiment, being a derivative of the respective free form of the aromatic alcohol for reaction in accordance with the

invention. The free alcohol may also be present here; in that case, accordingly, there is a mixture. For this instance, the molar ratio between the free form of the aromatic alcohol for reaction in accordance with the invention and the stated additional component (ether form of an aromatic alcohol) may be between 0:100, preferably, preferably 1:1, or 1:2 or 1:4.

The reason for the advantage of the mixture of the aromatic alcohol with an ether form is that thereby it is possible to influence the reactivity of the system. With the suitable selection of the ratio it is possible more particularly to create a system whose reactivity is in a balanced proportion with the storage stability of the system.

Preferred esters of the aromatic alcohols are those which do not enter into any secondary reactions under the polycondensation conditions and which possess sufficient reactivity, for the electrophilic attack of the aliphatic and aromatic aldehydes used, to generate polycondensation products in a high yield. Of particular interest are, more particularly, the esters of carboxylic acids, sulfonic acids, phosphoric acids, and phosphonic acids, but also those which possess an interface activity which can be adjusted with relatively long carbon chains.

Examples of suitable ester groups include saturated or unsaturated, straight-chain, branched or cyclic hydrocarbon radicals, which may contain one or more heteroatoms such as N, O, S, P, F, Cl, Br or I, examples being the esters of formic acid and salts thereof, acetic acid and salts thereof, propionic acid and salts thereof, and also esters of C₆-C₁₄ carboxylic acids and salts thereof, sulfonic esters, e.g., para-toluenesulfonic esters, amidosulfonic esters, and phosphoric esters, all based on the abovementioned

aromatic and heteroaromatic alcohols and carboxylic acids.

In this description, the term "aromatic" (alone or in
5 conjunction with other terms) identifies a monocyclic
or polycyclic (e.g., 2 or 3 rings) aromatic ring
system, preferably having 6 to 14 ring atoms, e.g.,
benzene or naphthalene. The term "heteroaromatic"
(alone or in conjunction with other terms) identifies
10 an aromatic heterocyclic ring system, preferably having
5 to 14 ring atoms. The heteroaromatic may be
monocyclic or polycyclic (e.g., 2 or 3 rings). Examples
of heteroaromatic amines a1) are indole, pyrole,
pyridine, pyrimidine, pyrazine, triazine, and
15 quinoline. Examples of heteroaromatic compounds a2) are
furan, benzofuran, thiophene, benzothiophene, pyran,
and benzopyran.

Aldehydes b) having at least 2 C atoms that are
20 preferred in accordance with the present invention
include not only aliphatic but also aromatic aldehydes.
As aldehydic component b) it is also possible to use
aldehyde precursors (latent aldehydes), such as acetals
and hemiacetals.

25 Particularly preferred aldehydes are one or more
selected from the following group: valeraldehyde,
caproaldehyde, caprylaldehyde, decanal, succinaldehyde,
cyclohexanecarbaldehyde, cyclopentanecarbaldehyde,
30 2-methyl-1-propanal, 2-methylpropionaldehyde,
acetaldehyde, acrolein, aldosterone, antimycin A,
8'-apo- β -caroten-8'-al, benzaldehyde, butanal, chloral,
citral, citronellal, crotonaldehyde,
dimethylaminobenzaldehyde, folic acid, fosmidomycin,
35 furfural, glutaraldehyde, glyceraldehyde,
glycolaldehyde, glyoxal, glyoxylic acid, heptanal,
2-hydroxybenzaldehyde, 3-hydroxybutanal, hydroxymethyl-
furfural, 4-hydroxynonenal, isobutanal,
isobutyraldehyde, methacrolein, 2-methylundecanal,

mucochloric acid, N-methylformamide, 2-nitrobenzaldehyde, nonanal, octanal, oleocanthal, orlistat, pentanal, phenylethanal, phycocyanin, piperonal, propanal, propenal, protocatechualdehyde, 5 retinal, salicylaldehyde, secologanin, streptomycin, strophanthidin, tylosin, vanillin, and cinnamaldehyde. Preference is likewise given to the aldehyde precursors (latent aldehydes) of the aforementioned aldehydes, examples being their acetals and hemiacetals.

10

For the purposes of the present invention it is possible for the aldehydic component to have at least one or two, more preferably two, three or four, very preferably two free aldehyde groups per molecule, it 15 being preferred for glyoxal, glyoxylic acid, glutaraldehyde and/or succinaldehyde to be present as aldehydic component, more particularly glyoxal, glutaraldehyde and/or succinaldehyde; glutaraldehyde is particularly preferred.

20

In the microcapsules of the invention, the molar ratio of a) of the at least one amine and/or aromatic or heteroaromatic compound (e.g., aromatic alcohol or ether thereof or derivative thereof such as ester) to 25 b) the at least one aldehydic component may be generally between 1:1 and 1:5, more preferably between 1:1 and 1:3. The ratio in the case of resorcinol as component a) is preferably about 1:1.5 to 1:3, in the case of phloroglucinol about 1:1 to 1:2, in the case of 30 melamine about 1:1.5 to 1:2, and in the case of urea about 1:1.2 to 1:1.5. The weight ratio of components a) + b) to c) (protective colloid), i.e., the ratio of the sum total weight of a) + b) to the weight of component c), is in general between 1:1 and 1:0.01, 35 more preferably between 1:0.2 and 1:0.05.


The copolymers c) used in the context of the present invention comprise units of 2-acrylamido-2-methylpropanesulfonic acid or its salts (AMPS,

commercially available for example as Lupasol[®] PA 140, BASF), e.g., alkali metal salts such as sodium or potassium salts or ammonium salts, e.g., 2-acrylamido-2-methylpropanesulfonic acid potassium salt, or
 5 2-acrylamido-2-methylpropanephosphonic acid or salts thereof, e.g., alkali metal salts such as sodium or potassium salts or ammonium salts, and one or more (meth)acrylates. AMPS and AMPP may also be used in a mixture here. The term "(meth)acrylate" in this
 10 application identifies both methacrylates and acrylates. The copolymers are suitable as protective colloids and can be used advantageously during the production of microcapsules.

15 Particularly suitable base monomers include the following:


2-Acrylamido-2-methylpropanesulfonic acid and its alkali metal and ammonium salts

20

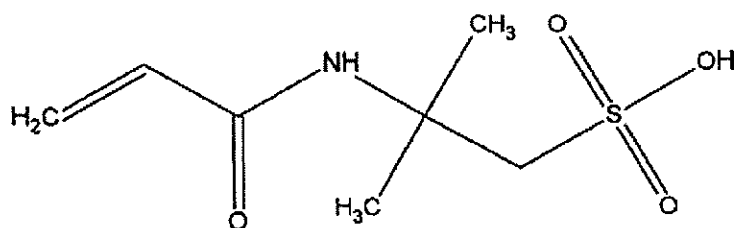

2-Acrylamido-2-methyl-1-propanephosphonic acid and its alkali metal and ammonium salts:

25

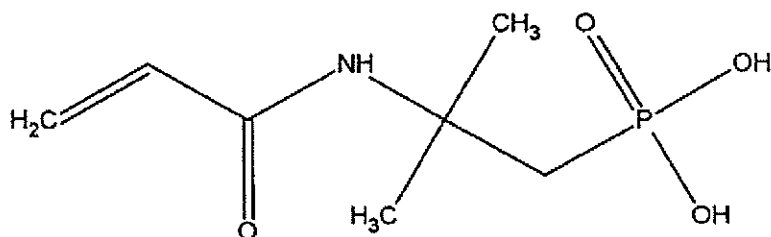

Particularly preferred are copolymers c) based on AMPS. The copolymers c) may be constructed from two or more
 30 comonomers, as for example from two comonomers

(bipolymers), three comonomers (terpolymers) or from four comonomers. In addition to AMPS and/or AMPP there may be one, two or more, more particularly one or two (meth)acrylate comonomers present.

5

As well as AMPS and/or AMPP there are one or more (meth)acrylate monomers present and optionally one or more further monomers, examples being acrylamide, N-vinylpyrrolidone (available commercially as Luviskol®
10 K15, K30 or K90, BASF), di- or polycarboxylates or polystyrene sulfonates, vinyl compounds such as vinyl esters, styrenes, vinyl ethers, N-vinylcaprolactam, vinylphosphoric acid and its salts and esters, vinylphosphonic acid and its salts and esters,
15 vinylsulfonic acid and its salts and esters, vinylcarboxylic acids and their salts and esters (e.g., vinylacetic acid) and/or maleic anhydride, ethylene and/or maleic anhydride, isobutylene and/or maleic anhydride, styrene-maleic anhydride, or salts of amyl
20 compounds or allyl compounds.

Preferred (meth)acrylate comonomers are acrylic acid and methacrylic acid and their esters, the ester groups being, for example, saturated or unsaturated, straight-
25 chain, branched or cyclic hydrocarbon radicals, which may comprise one or more heteroatoms such as N, O, S, P, F, Cl, Br and/or I. Examples of such hydrocarbon radicals are straight-chain, branched or cyclic alkyl, straight-chain, branched or cyclic alkenyl, aryl such
30 as phenyl or heterocyclyl such as tetrahydrofurfuryl.

Particularly preferred (meth)acrylate comonomers contemplated are as follows:

35 a) acrylic acid, C_1 - C_{14} alkyl-acrylic acid such as methacrylic acid;

b) (meth)acrylamides such as acrylamide, methacrylamide, diacetoneacrylamide, diacetone-

methacrylamide, N-butoxymethylacrylamide, N-isobutoxy-methylacrylamide, N-butoxymethylmethacrylamide, N-isobutoxymethylmethacrylamide, N-methylolacrylamide, N-methylolmethacrylamide;

5

c) heterocyclyl (meth)acrylates such as tetrahydrofurfuryl acrylate and tetrahydrofurfuryl methacrylate, or carbocyclic (meth)acrylates such as isobornyl acrylate and isobornyl methacrylate;

10

d) urethane (meth)acrylates such as diurethane diacrylate and diurethane methacrylate (CAS: 72869-86-4);

15 e) C₁-C₁₄ alkyl acrylates such as methyl, ethyl, n-propyl, isopropyl, n-butyl, sec-butyl, isobutyl, tert-butyl, n-pentyl, isopentyl, hexyl (e.g., n-hexyl, isohexyl or cyclohexyl), heptyl, octyl (e.g., 2-ethylhexyl), nonyl, decyl (e.g., 2-propylheptyl or isodecyl), undecyl, dodecyl, tridecyl (e.g.,
20 isotridecyl), and tetradecyl acrylate; the alkyl groups may be optionally substituted by one or more halogen atoms (e.g., fluorine, chlorine, bromine or iodine), e.g., trifluoroethyl acrylate, or by one or more amino groups, e.g., diethylaminoethyl acrylate, or by one or
25 more alkoxy groups, such as methoxypropyl acrylate, or by one or more aryloxy groups, such as phenoxyethyl acrylate;

30 f) C₂-C₁₄ alkenyl acrylates such as ethenyl, n-propenyl, isopropenyl, n-butenyl, sec-butenyl, isobutenyl, tert-butenyl, n-pentenyl, isopentenyl, hexenyl (e.g., n-hexenyl, isohexenyl or cyclohexenyl), heptenyl, octenyl (e.g., 2-ethylhexenyl), nonenyl, decenyl (e.g., 2-propenylheptyl or isodecenyl), undecenyl, dodecenyl,
35 tridecenyl (e.g., isotridecenyl), and tetradecenyl acrylate, and their epoxides such as glycidyl acrylate or aziridines such as aziridine acrylate;

g) C₁-C₁₄ hydroxyalkyl acrylates such as hydroxymethyl, hydroxyethyl, hydroxy-n-propyl, hydroxyisopropyl, hydroxy-n-butyl, hydroxy-sec-butyl, hydroxyisobutyl, hydroxy-tert-butyl, hydroxy-n-pentyl, hydroxyisopentyl, hydroxyhexyl (e.g., hydroxy-n-hexyl, hydroxyisohexyl or hydroxycyclohexyl), hydroxyheptyl, hydroxyoctyl (e.g., 2-ethylhexyl), hydroxynonyl, hydroxydecyl (e.g., hydroxy-2-propylheptyl or hydroxyisodecyl), hydroxyundecyl, hydroxydodecyl, hydroxytridecyl (e.g., hydroxyisotridecyl), and hydroxytetradecyl acrylate, the hydroxyl group being located preferably in terminal position (ω position) (e.g., 4-hydroxy-n-butyl acrylate) or in (ω -1) position (e.g., 2-hydroxy-n-propyl acrylate) of the alkyl radical;

h) alkylene glycol acrylates comprising one or more alkylene glycol units. Examples are i) monoalkylene glycol acrylates, such as acrylates of ethylene glycol, propylene glycol (e.g., 1,2- or 1,3-propanediol), butylene glycol (e.g., 1,2-, 1,3- or 1,4-butanediol), pentylene glycol (e.g., 1,5-pentanediol) or hexylene glycol (e.g., 1,6-hexanediol), in which the second hydroxyl group is etherified or esterified, as for example by sulfuric acid, phosphoric acid, acrylic acid or methacrylic acid, or ii) polyalkylene glycol acrylates such as polyethylene glycol acrylates, polypropylene glycol acrylates, polybutylene glycol acrylates, polypentylene glycol acrylates or polyhexylene glycol acrylates, whose second hydroxyl group may optionally be etherified or esterified, as for example by sulfuric acid, phosphoric acid, acrylic acid or methacrylic acid;

Examples of (poly)alkylene glycol units with etherified hydroxyl groups are C₁-C₁₄ alkyloxy-(poly)alkylene glycols (e.g., C₁-C₁₄ alkyloxy-(poly)alkylene glycol acrylates); examples of (poly)alkylene glycol units with esterified hydroxyl groups are sulfonium-(poly)alkylene glycols (e.g., sulfonium-(poly)alkylene

glycol acrylates) and their salts, (poly)alkylene glycol diacrylates such as 1,4-butanediol diacrylate or 1,6-hexanediol diacrylate, or (poly)alkylene glycol methacrylate acrylates such as 1,4-butanediol
5 methacrylate acrylate or 1,6-hexanediol methacrylate acrylate;

The polyalkylene glycol acrylates may carry an acrylate group (e.g., polyethylene glycol monoacrylate,
10 polypropylene glycol monoacrylate, polybutylene glycol monoacrylate, polypentylene glycol monoacrylate or polyhexylene glycol monoacrylate) or two or more, preferably two, acrylate groups, such as polyethylene glycol diacrylate, polypropylene glycol diacrylate,
15 polybutylene glycol diacrylate, polypentylene glycol diacrylate or polyhexylene glycol diacrylate;

The polyalkylene glycol acrylates may also comprise two or more polyalkylene glycol blocks that are different
20 from one another, examples being blocks of polymethylene glycol and polyethylene glycol, or blocks of polyethylene glycol and polypropylene glycol;

The degree of polymerization of the polyalkylene glycol units or polyalkylene glycol blocks is generally in the
25 range from 1 to 20, preferably in the range from 3 to 10, more preferably in the range from 3 to 6.

i) C₁-C₁₄ alkyl methacrylates such as methyl, ethyl,
30 n-propyl, isopropyl, n-butyl, sec-butyl, isobutyl, tert-butyl, n-pentyl, isopentyl, hexyl (e.g., n-hexyl, isohexyl or cyclohexyl), heptyl, octyl (e.g., 2-ethylhexyl), nonyl, decyl (e.g., 2-propylheptyl or isodecyl), undecyl, dodecyl, tridecyl (e.g.,
35 isotridecyl), and tetradecyl methacrylate; the alkyl groups may be optionally substituted by one or more halogen atoms (e.g., fluorine, chlorine, bromine or iodine), e.g., trifluoroethyl methacrylate, or by one or more amino groups, e.g., diethylaminoethyl

methacrylate, or by one or more alkoxy groups, such as methoxypropyl methacrylate, or by one or more aryloxy groups, such as phenoxyethyl methacrylate;

5 j) C₂-C₁₄ alkenyl methacrylates such as ethenyl, n-propenyl, isopropenyl, n-butenyl, sec-butenyl, isobutenyl, tert-butenyl, n-pentenyl, isopentenyl, hexenyl (e.g., n-hexenyl, isohexenyl or cyclohexenyl), heptenyl, octenyl (e.g., 2-ethylhexenyl), nonenyl,
10 decenyl (e.g., 2-propenylheptyl or isodecenyl), undecenyl, dodecenyl, tridecenyl (e.g., isotridecenyl), and tetradecenyl methacrylate, and their epoxides such as glycidyl methacrylate or aziridines such as aziridine methacrylate;

15

k) C₁-C₁₄ hydroxyalkyl methacrylates such as hydroxymethyl, hydroxyethyl, hydroxy-n-propyl, hydroxyisopropyl, hydroxy-n-butyl, hydroxy-sec-butyl, hydroxyisobutyl, hydroxy-tert-butyl, hydroxy-n-pentyl,
20 hydroxyisopentyl, hydroxyhexyl (e.g., hydroxy-n-hexyl, hydroxyisohexyl or hydroxycyclohexyl), hydroxyheptyl, hydroxyoctyl (e.g., 2-ethylhexyl), hydroxynonyl, hydroxydecyl (e.g., hydroxy-2-propylheptyl or hydroxyisodecyl), hydroxyundecyl, hydroxydodecyl,
25 hydroxytridecyl (e.g., hydroxyisotridecyl), and hydroxytetradecyl methacrylate, the hydroxyl group being located preferably in terminal position (ω position) (e.g., 4-hydroxy-n-butyl methacrylate) or in (ω -1) position (e.g., 2-hydroxy-n-propyl methacrylate)
30 of the alkyl radical;

l) alkyleneglycol methacrylates comprising one or more alkyleneglycol units. Examples are i) monoalkyleneglycol methacrylates, such as methacrylates of ethyleneglycol,
35 glycol, propyleneglycol (e.g., 1,2- or 1,3-propanediol), butyleneglycol (e.g., 1,2-, 1,3- or 1,4-butanediol), pentyleneglycol (e.g., 1,5-pentanediol) or hexyleneglycol (e.g., 1,6-hexanediol), in which the second hydroxyl group is etherified or esterified, as

for example by sulfuric acid, phosphoric acid, acrylic acid or methacrylic acid, or ii) polyalkylene glycol methacrylates such as polyethylene glycol methacrylates, polypropylene glycol methacrylates, polybutylene glycol methacrylates, polypentylene glycol methacrylates or polyhexylene glycol methacrylates, whose second hydroxyl group may optionally be etherified or esterified, as for example by sulfuric acid, phosphoric acid, acrylic acid or methacrylic acid;

Examples of (poly)alkylene glycol units with etherified hydroxyl groups are C_1 - C_{14} alkyloxy-(poly)alkylene glycols (e.g., C_1 - C_{14} alkyloxy-(poly)alkylene glycol methacrylates), examples of (poly)alkylene glycol units with esterified hydroxyl groups are sulfonium-(poly)alkylene glycols (e.g., sulfonium-(poly)alkylene glycol methacrylates) and their salts, or (poly)alkylene glycol dimethacrylates such as 1,4-butanediol dimethacrylate;

The polyalkylene glycol methacrylates may carry one methacrylate group (e.g., polyethylene glycol monomethacrylate, polypropylene glycol monomethacrylate, polybutylene glycol monomethacrylate, polypentylene glycol monomethacrylate or polyhexylene glycol monomethacrylate) or two or more, preferably two, methacrylate groups, such as polyethylene glycol dimethacrylate, polypropylene glycol dimethacrylate, polybutylene glycol dimethacrylate, polypentylene glycol dimethacrylate or polyhexylene glycol dimethacrylate;


The polyalkylene glycol methacrylates may also comprise two or more polyalkylene glycol blocks that are different from one another, examples being blocks of polymethylene glycol and polyethylene glycol, or blocks of polyethylene glycol and polypropylene glycol (e.g., Bisomer PEM63PHD (Cognis), CAS 58916-75-9);

The degree of polymerization of the polyalkylene glycol units or polyalkylene glycol blocks is generally in the range from 1 to 20, preferably in the range from 3 to 10, more preferably in the range from 3 to 6.

5


Examples of preferred (meth)acrylate comonomers are listed below:

10 a) 4-hydroxybutyl acrylate

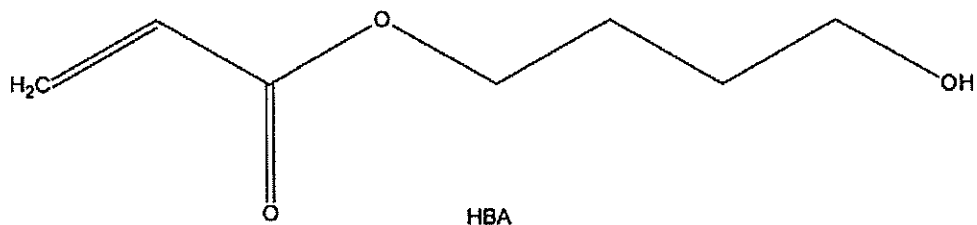


b) 2-hydroxypropyl methacrylate

15

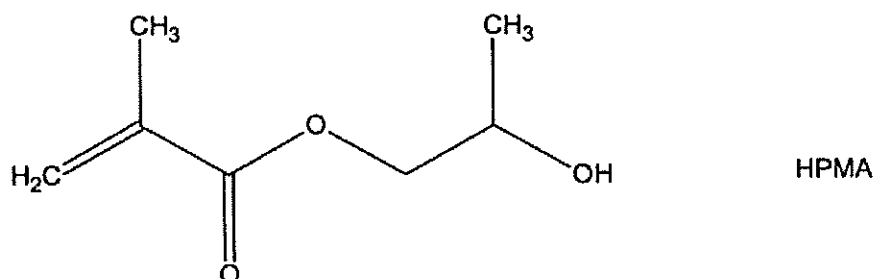


c) ammonium sulfatoethyl methacrylate

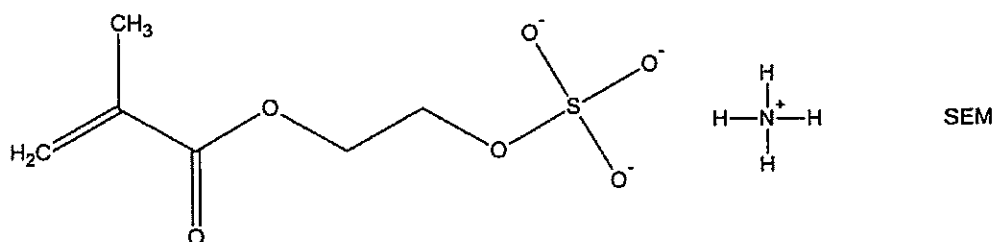


20


d) pentapropylene glycol methacrylate

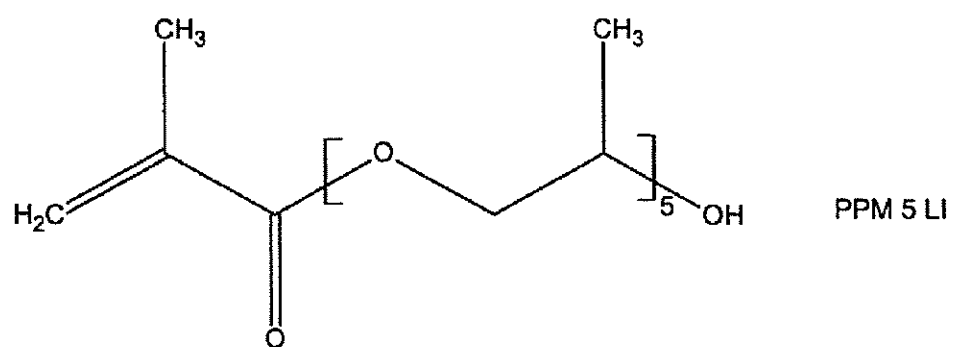


e) acrylic acid

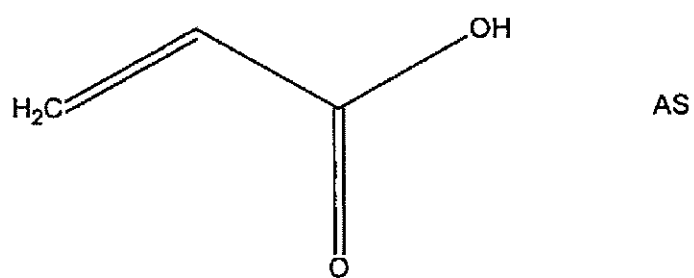

5

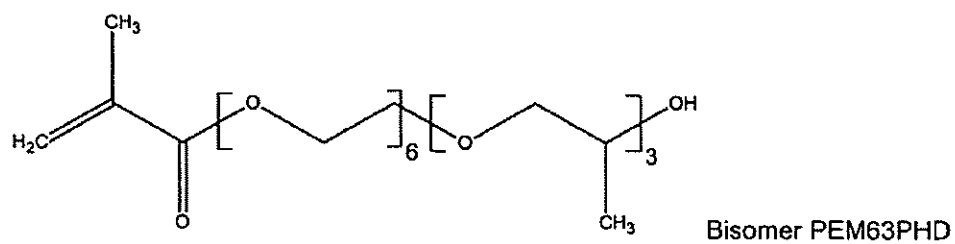


k) methoxy-polyethylene glycol methacrylate

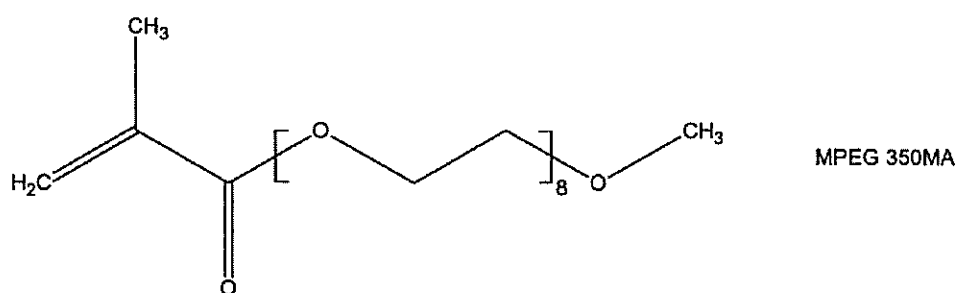


5


l) 2-propylheptyl acrylate (2-PHA)

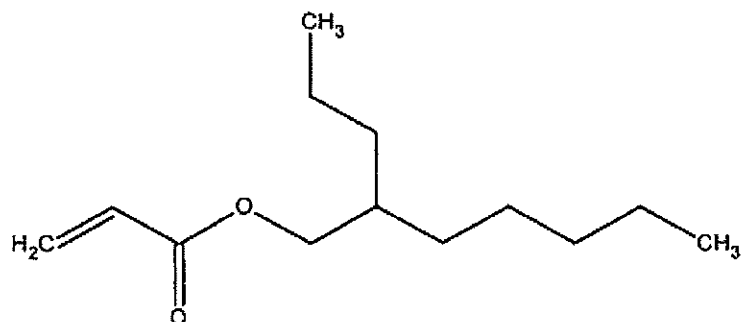


10 m) 1,3-butanediol dimethacrylate (BDDMA)

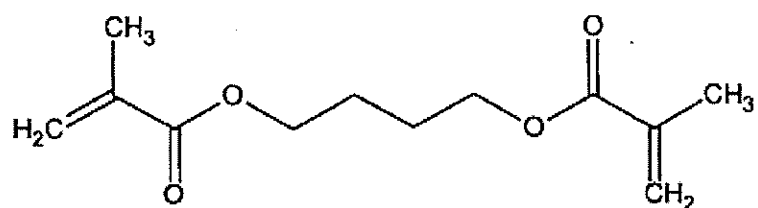

n) triethylene glycol dimethacrylate (TEGDMA)

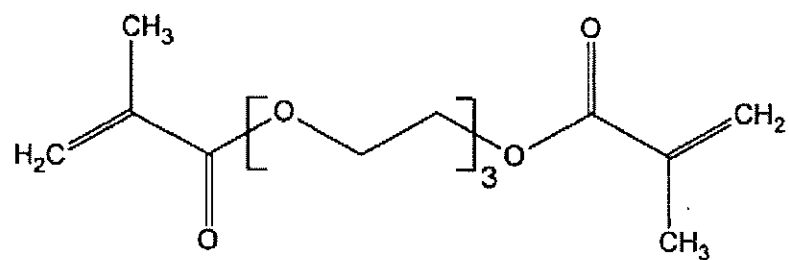


5 o) hydroxyethyl acrylate (HEA)

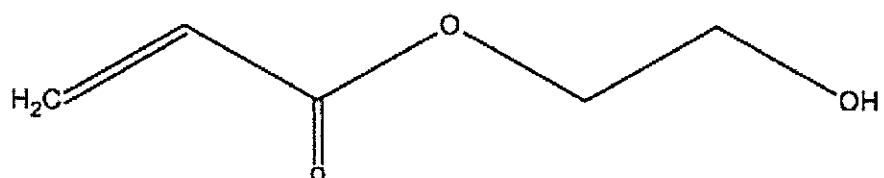


p) 2-hydroxypropyl acrylate (HPA)

10

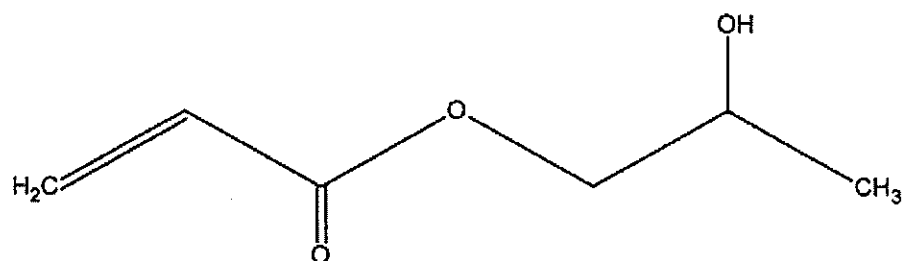


q) ethylene glycol dimethacrylate (EGDMA)

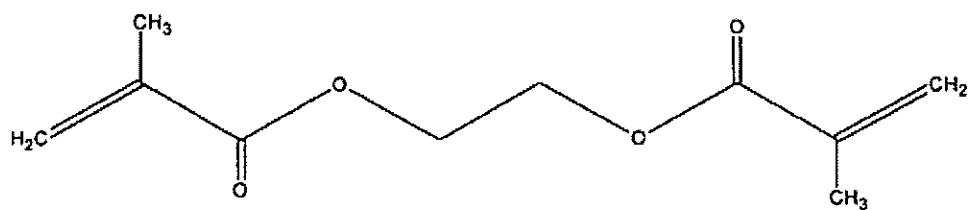


15


r) glycidyl methacrylate (GMA)




5 s) allyl methacrylate (ALMA)



10 t) Bisomer PEM 3 (polyethylene glycol methacrylate)

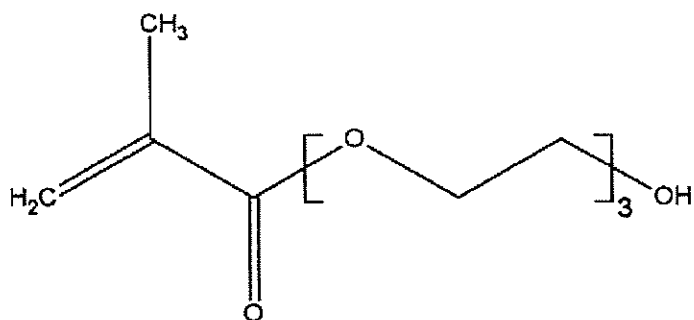


u) Bisomer IDMA (isodecyl methacrylate)

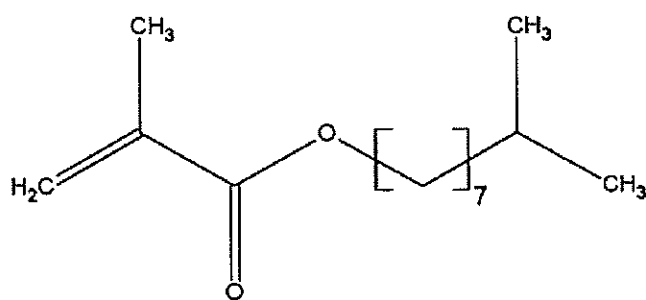


15


v) Bisomer C13MA (isotridecyl methacrylate)

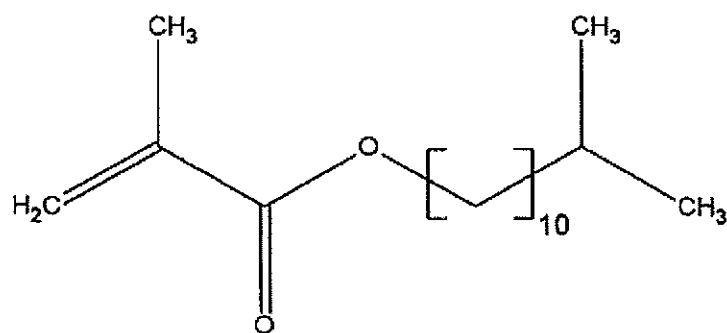


5 w) 3-sulfopropyl acrylate, more particularly in salt form such as the potassium salt




10 x) N-(2-acryloyloxyethyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

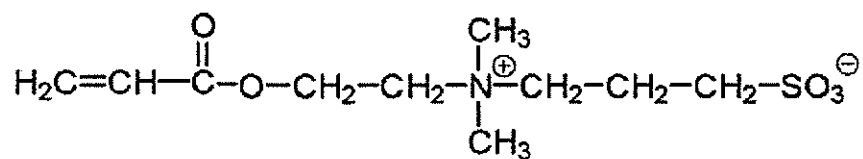

15 y) N-(2-methacryloyloxyethyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

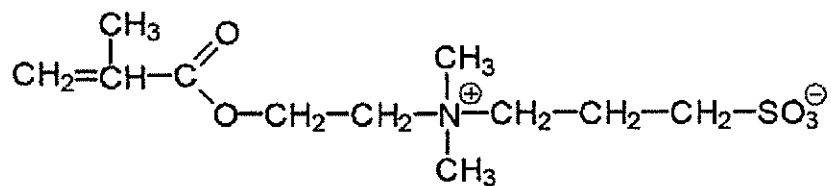


z) 3-sulfopropyl methacrylate, more particularly in salt form such as the potassium salt



5

z1) N-(3-methacrylamidopropyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine



10

Preferred copolymers c) are bipolymers containing AMPS and one of the aforementioned comonomers a) to z1). Also preferred are bipolymers containing AMPP and one of the aforementioned comonomers a) to z1).

15

Use may also be made of terpolymers of AMPS or AMPP with two (meth)acrylate monomers.

Where the copolymers c) comprise further monomers as well as AMPS and/or AMPP and (meth)acrylates, these further monomers are preferably selected from the group of the vinyl compounds such as vinyl esters, styrenes, N-vinylcaprolactam, vinylphosphoric acid and its salts and esters, vinylphosphonic acid and its salts and esters, vinylsulfonic acid and its salts and esters, vinylcarboxylic acids and their salts and esters (e.g., vinylacetic acid), unsaturated dicarboxylic or polycarboxylic acids such as maleic esters, or salts of amyl compounds or allyl compounds. Given below are preferred further comonomers for AMPS, AMPP, and (meth)acrylate monomers:

1) Vinyl compounds, e.g., vinyl esters such as vinyl acetate, vinyl laurate, vinyl propionate or vinyl

esters of neononanoic acid, N-vinylcaprolactam, vinylphosphoric acid and its salts and esters, vinylphosphonic acid and its salts and esters, vinylsulfonic acid and its salts and esters, 5 vinylcarboxylic acids and their salts and esters (e.g., vinylacetic acid), or aromatic vinyl compounds such as styrene comonomers, for example styrene, alpha-methylstyrene or styrenes with polar functionalization such as styrenes having hydroxyl, amino, nitrile, 10 carboxylic acid, phosphonic acid, phosphoric acid, nitro or sulfonic acid groups, and salts thereof, the polar functionalization of the styrenes being preferably in para position.

15 2) Unsaturated dicarboxylic or polycarboxylic acids, e.g., maleic esters such as dibutyl maleate or dioctyl maleate, as salts of allyl compounds, e.g., sodium allylsulfonate, and as salts of amyl derivatives, e.g., sodium amylsulfonate.

20 Preferred copolymers c) therefore include terpolymers containing AMPS, one of the aforementioned comonomers a) to z1), and a further comonomer selected from the group of vinyl compounds such as vinyl esters, 25 styrenes, N-vinylcaprolactam, vinylphosphoric acid and its salts and esters, vinylphosphonic acid and its salts and esters, vinylsulfonic acid and its salts and esters, vinylcarboxylic acids and their salts and esters (e.g., vinylacetic acid), unsaturated 30 dicarboxylic or polycarboxylic acids such as maleic esters, or salts of amyl compounds or allyl compounds.

Preference is also given to terpolymers containing AMPP, one of the aforementioned copolymers a) to z1), 35 and a further comonomers selected from the group of vinyl compounds such as vinyl esters, styrenes, N-vinylcaprolactam, vinylphosphoric acid and its salts and esters, vinylphosphonic acid and its salts and esters, vinylsulfonic acid and its salts and esters,

vinylcarboxylic acids and their salts and esters (e.g., vinylacetic acid), unsaturated dicarboxylic or polycarboxylic acids such as maleic esters, or salts of amyl compounds or allyl compounds.

5

Examples of particularly preferred terpolymers are terpolymers of the type AMPS + HEMA (comonomer i) + vinyl acetate or terpolymers of the type AMPP + HEMA + vinyl acetate, AMPS + HEMA + vinyl propionate, AMPP +
10 HEMA + vinyl propionate, AMPS + HEMA + N-vinylcaprolactam, AMPP + HEMA + N-vinylcaprolactam, AMPS + HEMA + styrene, AMPP + HEMA + styrene, AMPS + HEMA + p-hydroxystyrene, AMPP + HEMA + p-hydroxystyrene, AMPS + HEMA + vinyl laurate, AMPP +
15 HEMA + vinyl laurate, AMPS + HEMA + vinylphosphoric acid, AMPP + HEMA + vinylphosphoric acid, AMPS + HEMA + trimethyl vinylphosphate, AMPP + HEMA + trimethyl vinylphosphate, AMPS + HEMA + vinylphosphonic acid, AMPP + HEMA + vinylphosphonic acid, AMPS + HEMA +
20 dimethyl vinylphosphonate, AMPP + HEMA + dimethyl vinylphosphonate, AMPS + HEMA + vinylsulfonic acid, AMPP + HEMA + vinylsulfonic acid, AMPS + HEMA + vinylacetic acid, AMPP + HEMA + vinylacetic acid;

25 AMPS + HEA (comonomer o) + vinyl acetate, AMPP + HEA + vinyl acetate, AMPS + HEA + vinyl propionate, AMPP + HEA + vinyl propionate, AMPS + HEA + N-vinylcaprolactam, AMPP + HEA + N-vinylcaprolactam, AMPS + HEA + styrene, AMPP + HEA + styrene, AMPS + HEA
30 + p-hydroxystyrene, AMPP + HEA + p-hydroxystyrene, AMPS + HEA + vinyl laurate, AMPP + HEA + vinyl laurate, AMPS + HEA + vinylphosphoric acid, AMPP + HEA + vinylphosphoric acid, AMPS + HEA + trimethyl vinylphosphate, AMPP + HEA + trimethyl vinylphosphate,
35 AMPS + HEA + vinylphosphonic acid, AMPP + HEA + vinylphosphonic acid, AMPS + HEA + dimethyl vinylphosphonate, AMPP + HEA + dimethyl vinylphosphonate, AMPS + HEA + vinylsulfonic acid, AMPP

+ HEA + vinylsulfonic acid, AMPS + HEA + vinylacetic acid, AMPP + HEA + vinylacetic acid;

AMPS + HPMA (comonomer b) + vinyl acetate, AMPP + HPMA
5 + vinyl acetate, AMPS + HPMA + vinyl propionate, AMPP +
HPMA + vinyl propionate, AMPS + HPMA +
N-vinylcaprolactam, AMPP + HPMA + N-vinylcaprolactam,
AMPS + HPMA + styrene, AMPP + HPMA + styrene, AMPS +
HPMA + p-hydroxystyrene, AMPP + HPMA +
10 p-hydroxystyrene, AMPS + HPMA + vinyl laurate, AMPP +
HPMA + vinyl laurate, AMPS + HPMA + vinylphosphoric
acid, AMPP + HPMA + vinylphosphoric acid, AMPS + HPMA +
trimethyl vinylphosphate, AMPP + HPMA + trimethyl
vinylphosphate, AMPS + HPMA + vinylphosphonic acid,
15 AMPP + HPMA + vinylphosphonic acid, AMPS + HPMA +
dimethyl vinylphosphonate, AMPP + HPMA + dimethyl
vinylphosphonate, AMPS + HPMA + vinylsulfonic acid,
AMPP + HPMA + vinylsulfonic acid, AMPS + HPMA +
vinylacetic acid, AMPP + HPMA + vinylacetic acid;

20

AMPS + HPA (comonomer p) + vinyl acetate, AMPP + HPA +
vinyl acetate, AMPS + HPA + vinyl propionate, AMPP +
HPA + vinyl propionate, AMPS + HPA +
N-vinylcaprolactam, AMPP + HPA + N-vinylcaprolactam,
25 AMPS + HPA + styrene, AMPP + HPA + styrene, AMPS + HPA
+ p-hydroxystyrene, AMPP + HPA + p-hydroxystyrene, AMPS
+ HPA + vinyl laurate, AMPP + HPA + vinyl laurate, AMPS
+ HPA + vinylphosphoric acid, AMPP + HPA +
vinylphosphoric acid, AMPS + HPA + trimethyl
30 vinylphosphate, AMPP + HPA + trimethyl vinylphosphate,
AMPS + HPA + vinylphosphonic acid, AMPP + HPA +
vinylphosphonic acid, AMPS + HPA + dimethyl
vinylphosphonate, AMPP + HPA + dimethyl
vinylphosphonate, AMPS + HPA + vinylsulfonic acid, AMPP
35 + HPA + vinylsulfonic acid, AMPS + HPA + vinylacetic
acid, AMPP + HPA + vinylacetic acid;

AMPS + HBA (comonomer a) + vinyl acetate, AMPP + HBA +
vinyl acetate, AMPS + HBA + vinyl propionate, AMPP +

HBA + vinyl propionate, AMPS + HBA + N-vinylcaprolactam, AMPP + HBA + N-vinylcaprolactam, AMPS + HBA + styrene, AMPP + HBA + styrene, AMPS + HBA + p-hydroxystyrene, AMPP + HBA + p-hydroxystyrene, AMPS + HBA + vinyl laurate, AMPP + HBA + vinyl laurate, AMPS + HBA + vinylphosphoric acid, AMPP + HBA + vinylphosphoric acid, AMPS + HBA + trimethyl vinylphosphate, AMPP + HBA + trimethyl vinylphosphate, AMPS + HBA + vinylphosphonic acid, AMPP + HBA + vinylphosphonic acid, AMPS + HBA + dimethyl vinylphosphonate, AMPP + HBA + dimethyl vinylphosphonate, AMPS + HBA + vinylsulfonic acid, AMPP + HBA + vinylsulfonic acid, AMPS + HBA + vinylacetic acid, AMPP + HBA + vinylacetic acid;

AMPS + PEM6LD (comonomer f) + vinyl acetate, AMPP + PEM6LD + vinyl acetate, AMPS + PEM6LD + vinyl propionate, AMPP + PEM6LD + vinyl propionate, AMPS + PEM6LD + N-vinylcaprolactam, AMPP + PEM6LD + N-vinylcaprolactam, AMPS + PEM6LD + styrene, AMPP + PEM6LD + styrene, AMPS + PEM6LD + p-hydroxystyrene, AMPP + PEM6LD + p-hydroxystyrene, AMPS + PEM6LD + vinyl laurate, AMPP + PEM6LD + vinyl laurate, AMPS + PEM6LD + vinylphosphoric acid, AMPP + PEM6LD + vinylphosphoric acid, AMPS + PEM6LD + trimethyl vinylphosphate, AMPP + PEM6LD + trimethyl vinylphosphate, AMPS + PEM6LD + vinylphosphonic acid, AMPP + PEM6LD + vinylphosphonic acid, AMPS + PEM6LD + dimethyl vinylphosphonate, AMPP + PEM6LD + dimethyl vinylphosphonate, AMPS + PEM6LD + vinylsulfonic acid, AMPP + PEM6LD + vinylsulfonic acid, AMPS + PEM6LD + vinylacetic acid, AMPP + PEM6LD + vinylacetic acid;

AMPS + PPA6 (comonomer g) + vinyl acetate, AMPP + PPA6 + vinyl acetate, AMPS + PPA6 + vinyl propionate, AMPP + PPA6 + vinyl propionate, AMPS + PPA6 + N-vinylcaprolactam, AMPP + PPA6 + N-vinylcaprolactam, AMPS + PPA6 + styrene, AMPP + PPA6 + styrene, AMPS + PPA6 + p-hydroxystyrene, AMPP + PPA6 +

p-hydroxystyrene, AMPS + PPA6 + vinyl laurate, AMPP + PPA6 + vinyl laurate, AMPS + PPA6 + vinylphosphoric acid, AMPP + PPA6 + vinylphosphoric acid, AMPS + PPA6 + trimethyl vinylphosphate, AMPP + PPA6 + trimethyl vinylphosphate, AMPS + PPA6 + vinylphosphonic acid, AMPP + PPA6 + vinylphosphonic acid, AMPS + PPA6 + dimethyl vinylphosphonate, AMPP + PPA6 + dimethyl vinylphosphonate, AMPS + PPA6 + vinylsulfonic acid, AMPP + PPA6 + vinylsulfonic acid, AMPS + PPA6 + vinylacetic acid, AMPP + PPA6 + vinylacetic acid;

Also possible are tetrapolymers, e.g., AMPS or AMPP + HEMA + vinyl acetate, and higher copolymers through incorporation of further comonomers, depending on profile of properties and profile of requirements.

The copolymers c) generally have a fraction of AMPS units or AMPP units of greater than 50 mol%, preferably in the range of 60-95 mol%, more preferably of 80-99 mol%; the fraction of the further monomers is generally less than 50 mol%, preferably in the range from 5 to 40 mol%, more preferably from 0.1 to 20 mol%. The fraction of (meth)acrylate monomers in bipolymers is generally in the range from 0.1 mol% to 40 mol%, while in terpolymers it is in the range from 0.1 mol% to 20 mol%. The fraction of further monomers in terpolymers is generally in the range from 0.1 mol% to 5 mol%.

The copolymers c) may be obtained by conventional methods, as for example by a batch or semibatch process. For example, first of all, corresponding amounts of water and monomers are conveyed into a thermostatable reactor, and are placed under an inert gas atmosphere. This initial charge is then stirred and brought to reaction temperature (preferably in the region of around 70-80°C), and initiator is added, preferably in the form of an aqueous solution. Suitable initiators are known initiators for radical

polymerizations, examples being sodium, potassium or ammonium peroxodisulfate, or H_2O_2 based mixtures, examples being mixtures of H_2O_2 with citric acid. The maximum temperature is awaited and, as soon as the temperature in the reactor falls, either a) the remaining monomers are metered in, followed by an after-reaction (semibatch process), or b) the after-reaction takes place directly (batch process). After that, the resulting reaction mixture is cooled to room temperature and the copolymer is isolated from the aqueous solution, as for example by extraction with organic solvents such as hexane or methylene chloride, with subsequent distillative removal of the solvent. Thereafter the copolymer may be washed with organic solvent and dried. The reaction mixture obtained may also be subjected directly to further processing, in which case it is an advantage to add a preservative to the aqueous copolymer solution.

The copolymers are suitable as protective colloids in the production of microcapsules. Preferred microcapsules of the present invention have the following components a), b), and c):

phloroglucinol, glutaraldehyde, AMPS/hydroxyethyl methacrylate copolymer;

phloroglucinol, succinaldehyde, AMPS/hydroxyethyl methacrylate copolymer;

phloroglucinol, glyoxal, AMPS/hydroxyethyl methacrylate copolymer;

phloroglucinol, glyoxylic acid, AMPS/hydroxyethyl methacrylate copolymer;

phloroglucinol, glutaraldehyde, AMPS/hydroxyethyl acrylate copolymer;

phloroglucinol, succinaldehyde, AMPS/hydroxyethyl acrylate copolymer;

phloroglucinol, glyoxal, AMPS/hydroxyethyl acrylate copolymer;

phloroglucinol, glyoxylic acid, AMPS/hydroxyethyl
acrylate copolymer;

5 phloroglucinol, glutaraldehyde, AMPS/hydroxypropyl
methacrylate copolymer;

phloroglucinol, succinaldehyde, AMPS/hydroxypropyl
methacrylate copolymer;

phloroglucinol, glyoxal, AMPS/hydroxypropyl
methacrylate copolymer;

10 phloroglucinol, glyoxylic acid, AMPS/hydroxypropyl
methacrylate copolymer;

phloroglucinol, glutaraldehyde, AMPS/hydroxypropyl
acrylate copolymer;

15 phloroglucinol, succinaldehyde, AMPS/hydroxypropyl
acrylate copolymer;

phloroglucinol, glyoxal, AMPS/hydroxypropyl acrylate
copolymer;

phloroglucinol, glyoxylic acid, AMPS/hydroxypropyl
20 acrylate copolymer;

phloroglucinol, glutaraldehyde, AMPS/hydroxybutyl
methacrylate copolymer;

phloroglucinol, succinaldehyde, AMPS/hydroxybutyl
25 methacrylate copolymer;

phloroglucinol, glyoxal, AMPS/hydroxybutyl methacrylate
copolymer;

phloroglucinol, glyoxylic acid, AMPS/hydroxybutyl
methacrylate copolymer;

30 phloroglucinol, glutaraldehyde, AMPS/hydroxybutyl
acrylate copolymer;

phloroglucinol, succinaldehyde, AMPS/hydroxybutyl
acrylate copolymer;

35 phloroglucinol, glyoxal, AMPS/hydroxybutyl acrylate
copolymer;

phloroglucinol, glyoxylic acid, AMPS/hydroxybutyl
acrylate copolymer;

phloroglucinol, glutaraldehyde, AMPS/polyethylene glycol monomethacrylate copolymer;
 phloroglucinol, succinaldehyde, AMPS/polyethylene glycol monomethacrylate copolymer;
 5 phloroglucinol, glyoxal, AMPS/polyethylene glycol monomethacrylate copolymer;
 phloroglucinol, glyoxylic acid, AMPS/polyethylene glycol monomethacrylate copolymer;

10 phloroglucinol, glutaraldehyde, AMPS/polyethylene glycol monoacrylate copolymer;
 phloroglucinol, succinaldehyde, AMPS/polyethylene glycol monoacrylate copolymer;
 phloroglucinol, glyoxal, AMPS/polyethylene glycol monoacrylate copolymer;
 15 phloroglucinol, glyoxylic acid, AMPS/polyethylene glycol monoacrylate copolymer;

phloroglucinol, glutaraldehyde, AMPS/polypropylene glycol monomethacrylate copolymer;
 20 phloroglucinol, succinaldehyde, AMPS/polypropylene glycol monomethacrylate copolymer;
 phloroglucinol, glyoxal, AMPS/polypropylene glycol monomethacrylate copolymer;

25 phloroglucinol, glyoxylic acid, AMPS/polypropylene glycol monomethacrylate copolymer;

phloroglucinol, glutaraldehyde, AMPS/polypropylene glycol monoacrylate copolymer;
 30 phloroglucinol, succinaldehyde, AMPS/polypropylene glycol monoacrylate copolymer;
 phloroglucinol, glyoxal, AMPS/polypropylene glycol monoacrylate copolymer;

phloroglucinol, glyoxylic acid, AMPS/polypropylene glycol monoacrylate copolymer;
 35

phloroglucinol, glutaraldehyde, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;

- phloroglucinol, succinaldehyde, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;
 phloroglucinol, glyoxal, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;
- 5 phloroglucinol, glyoxylic acid, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;
- phloroglucinol, glutaraldehyde, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
- 10 phloroglucinol, succinaldehyde, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
 phloroglucinol, glyoxal, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
 phloroglucinol, glyoxylic acid, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
- 15
- resorcinol, glutaraldehyde, AMPS/hydroxyethyl methacrylate copolymer;
 resorcinol, succinaldehyde, AMPS/hydroxyethyl methacrylate copolymer;
- 20 methacrylate copolymer;
 resorcinol, glyoxal, AMPS/hydroxyethyl methacrylate copolymer;
 resorcinol, glyoxylic acid, AMPS/hydroxyethyl methacrylate copolymer;
- 25
- resorcinol, glutaraldehyde, AMPS/hydroxyethyl acrylate copolymer;
 resorcinol, succinaldehyde, AMPS/hydroxyethyl acrylate copolymer;
- 30 methacrylate copolymer;
 resorcinol, glyoxylic acid, AMPS/hydroxyethyl acrylate copolymer;
- 35 resorcinol, glutaraldehyde, AMPS/hydroxypropyl methacrylate copolymer;
 resorcinol, succinaldehyde, AMPS/hydroxypropyl methacrylate copolymer;

resorcinol, glyoxal, AMPS/hydroxypropyl methacrylate
copolymer;
resorcinol, glyoxylic acid, AMPS/hydroxypropyl
methacrylate copolymer;

5
resorcinol, glutaraldehyde, AMPS/hydroxypropyl acrylate
copolymer;
resorcinol, succinaldehyde, AMPS/hydroxypropyl acrylate
copolymer;

10
resorcinol, glyoxal, AMPS/hydroxypropyl acrylate
copolymer;
resorcinol, glyoxylic acid, AMPS/hydroxypropyl acrylate
copolymer;

15
resorcinol, glutaraldehyde, AMPS/hydroxybutyl
methacrylate copolymer;
resorcinol, succinaldehyde, AMPS/hydroxybutyl
methacrylate copolymer;
resorcinol, glyoxal, AMPS/hydroxybutyl methacrylate
20
copolymer;
resorcinol, glyoxylic acid, AMPS/hydroxybutyl
methacrylate copolymer;

25
resorcinol, glutaraldehyde, AMPS/hydroxybutyl acrylate
copolymer;
resorcinol, succinaldehyde, AMPS/hydroxybutyl acrylate
copolymer;
resorcinol, glyoxal, AMPS/hydroxybutyl acrylate
copolymer;

30
resorcinol, glyoxylic acid, AMPS/hydroxybutyl acrylate
copolymer;

35
resorcinol, glutaraldehyde, AMPS/polyethylene glycol
monomethacrylate copolymer;
resorcinol, succinaldehyde, AMPS/polyethylene glycol
monomethacrylate copolymer;
resorcinol, glyoxal, AMPS/polyethylene glycol
monomethacrylate copolymer;

resorcinol, glyoxylic acid, AMPS/polyethylene glycol
monomethacrylate copolymer;

5 resorcinol, glutaraldehyde, AMPS/polyethylene glycol
monoacrylate copolymer;

resorcinol, succinaldehyde, AMPS/polyethylene glycol
monoacrylate copolymer;

resorcinol, glyoxal, AMPS/polyethylene glycol
monoacrylate copolymer;

10 resorcinol, glyoxylic acid, AMPS/polyethylene glycol
monoacrylate copolymer;

resorcinol, glutaraldehyde, AMPS/polypropylene glycol
monomethacrylate copolymer;

15 resorcinol, succinaldehyde, AMPS/polypropylene glycol
monomethacrylate copolymer;

resorcinol, glyoxal, AMPS/polypropylene glycol
monomethacrylate copolymer;

resorcinol, glyoxylic acid, AMPS/polypropylene glycol
20 monomethacrylate copolymer;

resorcinol, glutaraldehyde, AMPS/polypropylene glycol
monoacrylate copolymer;

resorcinol, succinaldehyde, AMPS/polypropylene glycol
25 monoacrylate copolymer;

resorcinol, glyoxal, AMPS/polypropylene glycol
monoacrylate copolymer;

resorcinol, glyoxylic acid, AMPS/polypropylene glycol
monoacrylate copolymer;

30 resorcinol, glutaraldehyde, AMPS/methoxy-polyethylene
glycol monomethacrylate copolymer;

resorcinol, succinaldehyde, AMPS/methoxy-polyethylene
glycol monomethacrylate copolymer;

35 resorcinol, glyoxal, AMPS/methoxy-polyethylene glycol
monomethacrylate copolymer;

resorcinol, glyoxylic acid, AMPS/methoxy-polyethylene
glycol monomethacrylate copolymer;

- resorcinol, glutaraldehyde, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
resorcinol, succinaldehyde, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
- 5 resorcinol, glyoxal, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
resorcinol, glyoxylic acid, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;
- 10 urea, glutaraldehyde, AMPS/hydroxyethyl methacrylate copolymer;
urea, succinaldehyde, AMPS/hydroxyethyl methacrylate copolymer;
urea, glyoxal, AMPS/hydroxyethyl methacrylate
- 15 copolymer;
urea, glyoxylic acid, AMPS/hydroxyethyl methacrylate copolymer;
- urea, glutaraldehyde, AMPS/hydroxyethyl acrylate
- 20 copolymer;
urea, succinaldehyde, AMPS/hydroxyethyl acrylate copolymer;
urea, glyoxal, AMPS/hydroxyethyl acrylate copolymer;
urea, glyoxylic acid, AMPS/hydroxyethyl acrylate
- 25 copolymer;
- urea, glutaraldehyde, AMPS/hydroxypropyl methacrylate copolymer;
urea, succinaldehyde, AMPS/hydroxypropyl methacrylate
- 30 copolymer;
urea, glyoxal, AMPS/hydroxypropyl methacrylate copolymer;
urea, glyoxylic acid, AMPS/hydroxypropyl methacrylate copolymer;
- 35 urea, glutaraldehyde, AMPS/hydroxypropyl acrylate copolymer;
urea, succinaldehyde, AMPS/hydroxypropyl acrylate copolymer;

urea, glyoxal, AMPS/hydroxypropyl acrylate copolymer;
 urea, glyoxylic acid, AMPS/hydroxypropyl acrylate
 copolymer;

5 urea, glutaraldehyde, AMPS/hydroxybutyl methacrylate
 copolymer;
 urea, succinaldehyde, AMPS/hydroxybutyl methacrylate
 copolymer;
 urea, glyoxal, AMPS/hydroxybutyl methacrylate
 10 copolymer;
 urea, glyoxylic acid, AMPS/hydroxybutyl methacrylate
 copolymer;

urea, glutaraldehyde, AMPS/hydroxybutyl acrylate
 15 copolymer;
 urea, succinaldehyde, AMPS/hydroxybutyl acrylate
 copolymer;
 urea, glyoxal, AMPS/hydroxybutyl acrylate copolymer;
 urea, glyoxylic acid, AMPS/hydroxybutyl acrylate
 20 copolymer;

urea, glutaraldehyde, AMPS/polyethylene glycol
 monomethacrylate copolymer;
 urea, succinaldehyde, AMPS/polyethylene glycol
 25 monomethacrylate copolymer;
 urea, glyoxal, AMPS/polyethylene glycol
 monomethacrylate copolymer;
 urea, glyoxylic acid, AMPS/polyethylene glycol
 monomethacrylate copolymer;

30 urea, glutaraldehyde, AMPS/polyethylene glycol
 monoacrylate copolymer;
 urea, succinaldehyde, AMPS/polyethylene glycol
 monoacrylate copolymer;

35 urea, glyoxal, AMPS/polyethylene glycol monoacrylate
 copolymer;
 urea, glyoxylic acid, AMPS/polyethylene glycol
 monoacrylate copolymer;

urea, glutaraldehyde, AMPS/polypropylene glycol
monomethacrylate copolymer;

urea, succinaldehyde, AMPS/polypropylene glycol
monomethacrylate copolymer;

5 urea, glyoxal, AMPS/polypropylene glycol
monomethacrylate copolymer;

urea, glyoxylic acid, AMPS/polypropylene glycol
monomethacrylate copolymer;

10 urea, glutaraldehyde, AMPS/polypropylene glycol
monoacrylate copolymer;

urea, succinaldehyde, AMPS/polypropylene glycol
monoacrylate copolymer;

urea, glyoxal, AMPS/polypropylene glycol monoacrylate
15 copolymer;

urea, glyoxylic acid, AMPS/polypropylene glycol
monoacrylate copolymer;

urea, glutaraldehyde, AMPS/methoxy-polyethylene glycol
20 monomethacrylate copolymer;

urea, succinaldehyde, AMPS/methoxy-polyethylene glycol
monomethacrylate copolymer;

urea, glyoxal, AMPS/methoxy-polyethylene glycol
monomethacrylate copolymer;

25 urea, glyoxylic acid, AMPS/methoxy-polyethylene glycol
monomethacrylate copolymer;

urea, glutaraldehyde, AMPS/methoxy-polyethylene glycol
monoacrylate copolymer;

30 urea, succinaldehyde, AMPS/methoxy-polyethylene glycol
monoacrylate copolymer;

urea, glyoxal, AMPS/methoxy-polyethylene glycol
monoacrylate copolymer;

urea, glyoxylic acid, AMPS/methoxy-polyethylene glycol
35 monoacrylate copolymer;

melamine, glutaraldehyde, AMPS/hydroxyethyl
methacrylate copolymer;

melamine, succinaldehyde, AMPS/hydroxyethyl
 methacrylate copolymer;
 melamine, glyoxal, AMPS/hydroxyethyl methacrylate
 copolymer;
 5 melamine, glyoxylic acid, AMPS/hydroxyethyl
 methacrylate copolymer;

 melamine, glutaraldehyde, AMPS/hydroxyethyl acrylate
 copolymer;
 10 melamine, succinaldehyde, AMPS/hydroxyethyl acrylate
 copolymer;
 melamine, glyoxal, AMPS/hydroxyethyl acrylate
 copolymer;
 melamine, glyoxylic acid, AMPS/hydroxyethyl acrylate
 15 copolymer;

 melamine, glutaraldehyde, AMPS/hydroxypropyl
 methacrylate copolymer;
 melamine, succinaldehyde, AMPS/hydroxypropyl
 20 methacrylate copolymer;
 melamine, glyoxal, AMPS/hydroxypropyl methacrylate
 copolymer;
 melamine, glyoxylic acid, AMPS/hydroxypropyl
 methacrylate copolymer;
 25
 melamine, glutaraldehyde, AMPS/hydroxypropyl acrylate
 copolymer;
 melamine, succinaldehyde, AMPS/hydroxypropyl acrylate
 copolymer;
 30 melamine, glyoxal, AMPS/hydroxypropyl acrylate
 copolymer;
 melamine, glyoxylic acid, AMPS/hydroxypropyl acrylate
 copolymer;

 35 melamine, glutaraldehyde, AMPS/hydroxybutyl
 methacrylate copolymer;
 melamine, succinaldehyde, AMPS/hydroxybutyl
 methacrylate copolymer;

melamine, glyoxal, AMPS/hydroxybutyl methacrylate
copolymer;
melamine, glyoxylic acid, AMPS/hydroxybutyl
methacrylate copolymer;

5
melamine, glutaraldehyde, AMPS/hydroxybutyl acrylate
copolymer;
melamine, succinaldehyde, AMPS/hydroxybutyl acrylate
copolymer;

10
melamine, glyoxal, AMPS/hydroxybutyl acrylate
copolymer;
melamine, glyoxylic acid, AMPS/hydroxybutyl acrylate
copolymer;

15
melamine, glutaraldehyde, AMPS/polyethylene glycol
monomethacrylate copolymer;
melamine, succinaldehyde, AMPS/polyethylene glycol
monomethacrylate copolymer;
melamine, glyoxal, AMPS/polyethylene glycol
20 monomethacrylate copolymer;
melamine, glyoxylic acid, AMPS/polyethylene glycol
monomethacrylate copolymer;

25
melamine, glutaraldehyde, AMPS/polyethylene glycol
monoacrylate copolymer;
melamine, succinaldehyde, AMPS/polyethylene glycol
monoacrylate copolymer;
melamine, glyoxal, AMPS/polyethylene glycol
monoacrylate copolymer;

30
melamine, glyoxylic acid, AMPS/polyethylene glycol
monoacrylate copolymer;

35
melamine, glutaraldehyde, AMPS/polypropylene glycol
monomethacrylate copolymer;
melamine, succinaldehyde, AMPS/polypropylene glycol
monomethacrylate copolymer;
melamine, glyoxal, AMPS/polypropylene glycol
monomethacrylate copolymer;

melamine, glyoxylic acid, AMPS/polypropylene glycol monomethacrylate copolymer;

5 melamine, glutaraldehyde, AMPS/polypropylene glycol monoacrylate copolymer;

melamine, succinaldehyde, AMPS/polypropylene glycol monoacrylate copolymer;

melamine, glyoxal, AMPS/polypropylene glycol monoacrylate copolymer;

10 melamine, glyoxylic acid, AMPS/polypropylene glycol monoacrylate copolymer;

melamine, glutaraldehyde, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;

15 melamine, succinaldehyde, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;

melamine, glyoxal, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;

20 melamine, glyoxylic acid, AMPS/methoxy-polyethylene glycol monomethacrylate copolymer;

melamine, glutaraldehyde, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;

25 melamine, succinaldehyde, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;

melamine, glyoxal, AMPS/methoxy-polyethylene glycol monoacrylate copolymer;

melamine, glyoxylic acid, AMPS/methoxy-polyethylene glycol monoacrylate copolymer.

30

Likewise suitable for the microcapsules of the invention are combinations wherein the aforementioned components a) and b) are present and AMPP instead of AMPS is present as component c). Of these, the following AMPP combinations are particularly preferred:

35

resorcinol, glutaraldehyde, AMPP/polyethylene glycol monomethacrylate copolymer;

- resorcinol, succinaldehyde, AMPP/polyethylene glycol monomethacrylate copolymer;
- resorcinol, glyoxal, AMPP/polyethylene glycol monomethacrylate copolymer;
- 5 resorcinol, glyoxylic acid, AMPP/polyethylene glycol monomethacrylate copolymer;
- resorcinol, glutaraldehyde, AMPP/polyethylene glycol monoacrylate copolymer;
- 10 resorcinol, succinaldehyde, AMPP/polyethylene glycol monoacrylate copolymer;
- resorcinol, glyoxal, AMPP/polyethylene glycol monoacrylate copolymer;
- resorcinol, glyoxylic acid, AMPP/polyethylene glycol
- 15 monoacrylate copolymer;
- resorcinol, glutaraldehyde, AMPP/polypropylene glycol monomethacrylate copolymer;
- resorcinol, succinaldehyde, AMPP/polypropylene glycol
- 20 monomethacrylate copolymer;
- resorcinol, glyoxal, AMPP/polypropylene glycol monomethacrylate copolymer;
- resorcinol, glyoxylic acid, AMPP/polypropylene glycol monomethacrylate copolymer;
- 25
- resorcinol, glutaraldehyde, AMPP/polypropylene glycol monoacrylate copolymer;
- resorcinol, succinaldehyde, AMPP/polypropylene glycol monoacrylate copolymer;
- 30 resorcinol, glyoxal, AMPP/polypropylene glycol monoacrylate copolymer;
- resorcinol, glyoxylic acid, AMPP/polypropylene glycol monoacrylate copolymer;
- 35 resorcinol, glutaraldehyde, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;
- resorcinol, succinaldehyde, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;

- resorcinol, glyoxal, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;
 resorcinol, glyoxylic acid, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;
- 5
 resorcinol, glutaraldehyde, AMPP/methoxy-polyethylene glycol monoacrylate copolymer;
 resorcinol, succinaldehyde, AMPP/methoxy-polyethylene glycol monoacrylate copolymer;
- 10
 resorcinol, glyoxal, AMPP/methoxy-polyethylene glycol monoacrylate copolymer;
 resorcinol, glyoxylic acid, AMPS/methoxypolyethylene glycol monoacrylate copolymer;
- 15
 phloroglucinol, glutaraldehyde, AMPP/polyethylene glycol monomethacrylate copolymer;
 phloroglucinol, succinaldehyde, AMPP/polyethylene glycol monomethacrylate copolymer;
 phloroglucinol, glyoxal, AMPP/polyethylene glycol monomethacrylate copolymer;
- 20
 phloroglucinol, glyoxylic acid, AMPS/polyethylene glycol monomethacrylate copolymer;
- 25
 phloroglucinol, glutaraldehyde, AMPP/polyethylene glycol monoacrylate copolymer;
 phloroglucinol, succinaldehyde, AMPP/polyethylene glycol monoacrylate copolymer;
 phloroglucinol, glyoxal, AMPP/polyethylene glycol monoacrylate copolymer;
- 30
 phloroglucinol, glyoxylic acid, AMPP/polyethylene glycol monoacrylate copolymer;
- 35
 phloroglucinol, glutaraldehyde, AMPP/polypropylene glycol monomethacrylate copolymer;
 phloroglucinol, succinaldehyde, AMPP/polypropylene glycol monomethacrylate copolymer;
 phloroglucinol, glyoxal, AMPP/polypropylene glycol monomethacrylate copolymer;

phloroglucinol, glyoxylic acid, AMPP/polypropylene glycol monomethacrylate copolymer;

5 phloroglucinol, glutaraldehyde, AMPP/polypropylene glycol monoacrylate copolymer;

phloroglucinol, succinaldehyde, AMPP/polypropylene glycol monoacrylate copolymer;

phloroglucinol, glyoxal, AMPP/polypropylene glycol monoacrylate copolymer;

10 phloroglucinol, glyoxylic acid, AMPP/polypropylene glycol monoacrylate copolymer;

phloroglucinol, glutaraldehyde, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;

15 phloroglucinol, succinaldehyde, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;

phloroglucinol, glyoxal, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;

phloroglucinol, glyoxylic acid, AMPP/methoxy-polyethylene glycol monomethacrylate copolymer;

20 phloroglucinol, glutaraldehyde, AMPP/methoxy-polyethylene glycol monoacrylate copolymer;

phloroglucinol, succinaldehyde, AMPP/methoxy-polyethylene glycol monoacrylate copolymer;

25 phloroglucinol, glyoxal, AMPP/methoxy-polyethylene glycol monoacrylate copolymer;

phloroglucinol, glyoxylic acid, AMPP/methoxypolyethylene glycol monoacrylate copolymer.

30

Also suitable for the microcapsules of the invention are combinations with two or more components a), more particularly the abovementioned combinations in which component a) is replaced by a combination of two or more compounds a), preferably by two amines a1) or by two aromatic or heteroaromatic compounds a2). Also suitable are the aforementioned combinations in which component a) consists of a combination of components

a1) and a2). Examples of such combinations with more than one component a) are given below:

5 phloroglucinol/melamine, glutaraldehyde, AMPS/methoxy-
polyethylene glycol monoacrylate copolymer;

resorcinol/melamine, glutaraldehyde, AMPS/methoxy-
polyethylene glycol monoacrylate copolymer;

10 urea/melamine, glutaraldehyde, AMPS/methoxy-
polyethylene glycol monoacrylate copolymer;

urea/melamine, glutaraldehyde, AMPP/methoxy-
polyethylene glycol monoacrylate copolymer.

15

The invention also encompasses physical mixtures of different microcapsules, so that, consequently, capsule mixtures based on the aforementioned microcapsule systems in every possible combination are encompassed.

20 The properties in this case may be adjusted in accordance with requirements, through the nature of the mixed microcapsules and their mixing ratio.

An example of one such mixture of microcapsules is a
25 combination of microcapsules of melamine, glutaraldehyde, AMPS, and PEM63PHD with microcapsules of phloroglucinol, glutaraldehyde, AMPS, and PEM63PHD, in proportions, for example, of 5:95 to 95:5, it being possible for the properties to be adjusted in
30 accordance with requirements - in the case of fragrance oil as core material, a higher storage stability or a fragrance release (boost) with long-term stability.

In one embodiment of the invention it is additionally
35 possible to use one or more agents containing silicon dioxide, such as amorphous hydrophobic silica gel, for producing the microcapsules of the invention. These agents are suitable more particularly for the aftertreatment of the surface of the microcapsules, for

the purpose, for example, of reducing the agglomeration tendency.

5 In one embodiment of the invention, the microcapsules of the invention can also be aftertreated using one or more nitrogen-containing or oxygen-containing agents. Examples of suitable oxygen-containing agents are, more particularly, resorcinol and phloroglucinol.

10 Among the nitrogen-containing agents it is preferred to employ heterocyclic compounds having at least one nitrogen atom as heteroatom, adjacent either to an amino-substituted carbon atom or to a carbonyl group, such as, for example, pyridazine, pyrimidine, pyrazine,
15 pyrrolidone, aminopyridine, and compounds derived therefrom. Advantageous compounds of this generic kind are aminotriazines and compounds derived therefrom. Suitable aminotriazines are in principle all aminotriazines, such as, for example, melamine, 2,6-diaminotriazine, substituted and dimeric
20 aminotriazines, and mixtures prepared from these compounds. Also advantageous are polyamides and dicyandiamide, urea and its derivatives, and pyrrolidone and compounds derived therefrom. Examples
25 of suitable pyrrolidones are, for example, imidazolidinone and compounds derived therefrom, such as hydantoin, for example, whose derivatives are particularly advantageous; particularly advantageous among these compounds are allantoin and its
30 derivatives. Also particularly advantageous are triamino-1,3,5-triazine (melamine) and its derivatives.

It should be emphasized particularly that the aftertreatment represents a "pure" aftertreatment of
35 the surface, in order to arrive at this preferred embodiment of the microcapsules of the invention. In other words, in this preferred embodiment, the nitrogen-containing, oxygen-containing or silicon-containing agent used is not uniformly involved in the

construction of the entire capsule wall, but is instead concentrated predominantly on to the outer surface of the capsule walls. The compounds used for aftertreatment are employed preferably in the form of slurries.

The present invention additionally provides microcapsule dispersions which comprise one or more of the microcapsules of the invention.

10

The present invention further provides for the use of at least one amine a1) for reaction in accordance with the invention, and/or of at least one aromatic or heteroaromatic compound such as an aromatic alcohol (or derivative thereof, more particularly ether thereof) a2), for reaction with an aldehydic component b) for reaction in accordance with the invention, to form the capsule walls of microcapsules. The free alcohol or ether thereof here may also be present in the form of a mixture. It is preferred for use in accordance with the invention to provide formaldehyde-free microcapsules. However, small amounts of formaldehyde may be added to the reaction mixture, generally less than 0.05% by weight, preferably less than 0.01% by weight, in each case based on the overall mixture, as a preservative, for example.

The present invention is based, as further subject matter, on a method for producing the microcapsules or microcapsule dispersions of the invention, in which at least one amine and/or aromatic or heteroaromatic compound such as an aromatic alcohol, at least one aldehydic component which has at least two C atoms per molecule, and in the presence of at least one copolymer which comprises units of AMPS and/or AMPP and one or more (meth)acrylate monomers, optionally in the presence of at least one substance to be encapsulated (core material), are combined and reacted, and the curing of the capsules takes place by later temperature

increase. In this case it is particularly preferred for the pH to be raised in the course of the method, more particularly prior to curing.

5 Preferably, in the method of the invention, first of all

10 a) at least one amine a1) and/or at least one aromatic or heteroaromatic compound such as an aromatic alcohol and/or derivative thereof (e.g., ester) or ether thereof a2), and at least one aldehydic component b), in the presence of at least one copolymer c) which contains units of AMPS and/or AMPP and one or more (meth)acrylate monomers, and at least one substance for encapsulation, are combined at a temperature of 40 to 65°C and at a pH of between 6 and 9, preferably between 7 and 8.5, and

15 b) in a later method step, at a temperature of 40 to 65°C, the pH is adjusted to between 2 and 11, preferably, in the case of resorcinol, to more than 9, preferably between 9.5 and 11, in the case of phloroglucinol to less than 4, preferably between 3 and 4, and in the case of melamine and urea in the range from 2 to 7, preferably between 20 3 and 6,

25 c) and later the curing of the capsules is carried out by temperature increase to 40°C to 110°C, preferably 70°C to 90°C, more particularly 80°C.

30 Through the selected parameters of metering rate, temperature, pH and/or stirring speed it is possible to influence the yield and quality of the microcapsules or microcapsule dispersions of the invention. More particularly, too low a temperature may result in the capsule wall being less impervious. This is evident to 35 the skilled person from a persistent oil phase, reduced yield, and deposition of core material as a condensate in the filter of the dryer. On the other hand, care ought to be taken to ensure that the reaction rate is

not too high, since otherwise only a small amount of wall material surrounds the capsules, and/or excessive free wall material is present outside the capsules. This free wall material may then be present in
5 particles which are larger than the capsules.

The alkalinity may likewise be important for the quality of microcapsules of the invention. In addition, the pH influences the tendency for the batch to gel, in
10 the context of the procedural regime.

In one embodiment of the method of the invention the alkalinity is adjusted using an alkali metal salt, preferably alkali metal carbonate, more particularly
15 sodium carbonate. Sodium carbonate is preferred, since it reduces the risk of gelling. For particular profiles of requirements, as for example for capsule systems which are particularly stable in an acidic medium, the aqueous solutions of alkali metals from main groups 1
20 and 2 of the Periodic Table of the Elements are more particularly suitable.

In the context of the method of the invention, at the beginning of the reaction (method step a)) of the amine
25 and/or aromatic alcohol with the aldehydic component, stirring may be carried out, in which case the stirring speed can be 500 to 2500 rpm, more particularly 1000 to 2000 rpm. To the resulting mixture it is then possible to add at least one copolymer which comprises units of
30 AMPS and/or AMPP and one or more (meth)acrylate monomers, and the substance to be encapsulated. Preferably, later, and in particular immediately before or during the raising of the alkalinity (method step b), the stirring speed is increased, and may then be
35 3000 to 5000 rpm, more particularly 3500 to 4500 rpm, especially 4000 rpm.

The stirring speed increased in this way is preferably maintained until the viscosity values of the mixture

fall, the stirring speed being lowered after the onset of a viscosity decrease, preferably to 500 to 2500 rpm, more preferably to 1000 to 2000 rpm. An earlier lowering of the stirring speed may lead likewise to the
5 unwanted gelling of the batch.

Preferably, after the beginning of the described decrease in viscosity, stirring is continued for at least 20 minutes, more particularly between 30 and
10 180 minutes, preferably at a stirring speed of 1000 to 2000 rpm and at a temperature of 40 to 65°C, before, in step c) of the method, the capsules are cured by temperature increase. This phase, after the beginning of the described viscosity decrease and before the
15 curing of the capsules, is also referred to in the present invention as the rest phase. The rest phase may be used preferably in order to achieve the preformation of sufficiently stable capsule walls - in other words, to form the capsule walls with sufficient stability
20 that core material no longer escapes.

The microcapsules of the invention are preferably formaldehyde-free. They can be processed as stable core/shell microcapsules from the aqueous slurry to
25 form a dry, free-flowable powder.

The microcapsules may be given a charge of hydrophobic and hydrophilic materials, with gaseous, liquid, and solid substances.
30

The present invention further provides for the use of microcapsules or microcapsule dispersions of the invention for the controlled release of core materials, which may be hydrophilic (e.g., flavors) or
35 hydrophobic. The core materials are, for example, active ingredients, preferably selected from the group of the fragrances and flavors, pesticides, herbicides, lubricants, glidants (e.g., fluorinated hydrocarbons), insecticides, active antimicrobial ingredients, active

pharmaceutical ingredients, active cosmetic ingredients (e.g., for shampoo), latent heat storage materials (e.g., waxes), catalysts (e.g., organic carbonates), self-healing agents (e.g., norbornene, dicyclopentadiene), coating systems such as varnishes (e.g., fragrance varnishes), colors (e.g., for carbonless copy systems), hydrophobic waxes, hydrophobic ene components or hydrophobic solvents.

Also provided by the present invention are products which comprise microcapsules or microcapsule dispersions of the invention, and whose use lies preferably in an area of application selected from the fields of coatings, such as carbonless copy systems, coating and impregnation of papers and security feature coating, catalyst-filled microcapsules, paint technology such as paint manufacture, construction chemicals, dental technology, preferably as an ingredient of fast-curing dental filling compositions, self-healing systems, cosmetics, preferably for fragrance and flavor oils, pharmacy, preferably as vehicles for active ingredients, medical technology, as for example for the encapsulation of species emitted by neurotransmitters such as NO, such as of nitroglycerol, for example, laundering, cleaning, disinfecting, adhesively bonding, flame suppression, the treatment of plants, preferably as fungicide, pesticide, insecticide or herbicide, or corrosion control.

The microcapsules of the invention can be used, for example, for producing varnishes, such as for fragrance varnishes, for example, and can be employed variably in terms of their degree of crosslinking, their size, their wall thickness and surface finish, and also in terms of the core material.

On account of the high chemical and physical resistance, they are suitable as stable core/shell capsule systems, including for use in aggressive media.

Hence it is possible to produce fragrance varnishes which can be applied via conventional doctor-blade systems in the coat thicknesses known in the printing industry, without a notable proportion of the capsules
5 being destroyed.

The microcapsules generally have an average diameter of 1-1000 μm . In the context of the present invention, the term "microcapsule" also encompasses nanocapsules,
10 i.e., capsules having an average diameter $< 1 \mu\text{m}$. The capsules preferably have an average diameter of 0.1 to 100 μm . The wall thickness is adjustable and may be 0.01-100 μm , more particularly, for example, 0.1 to 10 μm .

15 Also possible is the production of solid spheres, in other words particles which do not surround a core material. These solid spheres may have an average diameter of below 500 nm (preferably between 300 and
20 400 nm). They may preferably be monodisperse solid spheres. Phloroglucinol can be used in one embodiment for producing these solid spheres.

The solid spheres of the invention may find use as a
25 standard or control means in, for example, medical technology (e.g., as a calibrating solution in particle sizers or erythrocyte counters), or may be utilized as an abrasive ingredient in abrasives, for decorative effects or as spacers for printable varnishes with
30 pressure-sensitive particles.

The microcapsules of the invention can be used in the form of aqueous dispersions as impregnating resins in the wood/material segment, and are suitable more
35 particularly as impregnating resins with additional functions such as catalytic effects, color effects, thermochromic effects or security effects for decorative coating systems.

The present invention is elucidated below by a number of working examples, which are purely illustrative in nature and do not restrict the invention in any way:

5 **Example 1: Preparation of copolymers**

 a) AMPS-hydroxybutyl acrylate

For the 1500 g batch, 891 g of demineralized water are introduced together with 585 g of AMPS (50% aqueous solution) and 7.5 g of 4-hydroxybutyl acrylate (HBA)
10 into the reactor and placed under an inert gas atmosphere. The reaction mixture is heated to 75°C with stirring (400 rpm). Of the water-soluble initiator sodium peroxodisulfate, 0.03 g is dissolved in 15 g of water and injected into the reactor using a syringe
15 when the reaction temperature has been attained. Following attainment of the maximum temperature, an hour of after-reaction begins. The batch is subsequently cooled to room temperature and admixed with 1.5 g of preservative.

20 The aqueous solution is characterized by the viscosity, solids content, and pH. The viscosity is 540 mPas (measured at 20 rpm Brookfield), the solids content is 21%, and the pH is 3.3. 3 g of copolymer are applied to a Petri dish and dried in a drying cabinet at 160°C for
25 24 hours. The final mass is 0.69 g, corresponding to a yield of 21.6%.

 b) AMPS-polyalkylene glycol monomethacrylate

The initial charge consists of 912 g of demineralized
30 water, 240 g of AMPS, and 7.5 g of
poly(ethylene/propylene) glycol monomethacrylate (Bisomer PEM63PHD from Cognis, CAS No. 589-75-9). The mixture is placed under an inert gas atmosphere. The reaction mixture is heated to 75°C with stirring
35 (400 rpm). 1.5 g of sodium peroxodisulfate are dissolved in 15 g of water and transferred into the reactor using a syringe. When the temperature in the reactor has attained a maximum and is beginning to fall, 240 g of AMPS with 83 g of PEM63PHD are metered

in over a period of an hour using a peristaltic pump. This is followed by a half-hour after-reaction. The batch is subsequently cooled to room temperature and admixed with 1.5 g of preservative.

5 The aqueous solution is characterized by the viscosity, solids content, and pH. The viscosity is 110 mPas (measured at 20 rpm Brookfield), the solids content is 23%, and the pH is 3.1. 3 g of copolymer are applied to a Petri dish and dried in a drying cabinet at 160°C for
10 24 hours. The final mass is 0.68 g, corresponding to a yield of 21.6%.

Example 2: Phloroglucinol-melamine microcapsules

a) Preparation of the precondensate

15 5.4 g of phloroglucinol and 0.6 g of melamine are dissolved in 78.6 g of distilled water. The pH is adjusted to 3 using 1.2 g of 85% strength formic acid. The mixture is heated to 35°C and 14.2 g of 50% strength glutaraldehyde solution are added. After 5
20 minutes the soluble precondensate begins to form, evident from the dissolution of the melamine and phloroglucinol, which is barely soluble in water. The overall solids content of the precondensate is 14.0% by weight.

25

b) Production of the microcapsules

41.5 g of the soluble precondensate obtained in stage a) are admixed after 5 minutes with 3.0 g of the protective colloid, a copolymer of AMPS (2-acrylamido-
30 2-methyl-1-propylsulfonic acid) and PEM 6 (polyethylene glycol monomethacrylate), and 23.7 g of a fragrance oil for encapsulation. For the formation of particles, the speed is increased from 500 rpm to 2500 rpm at the same time. After 20 minutes, the resin begins to cure to
35 form structured capsule walls. In the following hour, stirring takes place at a rotation speed of 600 rpm. Within this hour, after 15 minutes, 7.5 g of a 14% by weight phloroglucinol slurry, acidified to a pH of 3 using formic acid (85%), are metered in for 45 minutes,

and also, after 20 minutes, 16 g of water are added, in order to prevent the slurry thickening. This is followed by a 2-hour curing phase at 80°C. Subsequently, 4.2 g of a 33% by weight melamine slurry (Folco slurry) acidified with 85% formic acid is metered in for 30 min. This is followed, lastly, by after-curing at a pH of 3 for 30 min. The capsule slurry is cooled to room temperature and adjusted to a pH of 7 using aqueous sodium hydroxide solution.

10

Technical data of the microcapsules obtained:

Diameter D(90):	10 μm
Solids:	33%
Core fraction:	70%
15 Efficiency:	90%
Powder yield:	90%
Residual aldehyde content:	< 500 ppm, determined by GC (FT-IR)

20 **Example 3: Melamine microcapsules**

31.0 g of glutaraldehyde solution (50%) are heated to 55°C with 90 g of distilled water, and a pH of 9.2 is set using aqueous sodium hydroxide solution (10%). Subsequently 5.6 g of melamine are added and this mixture is precondensed at 55°C for 10 minutes. Still at 55°C, 9.5 g of copolymer of AMPS (2-acrylamido-2-methyl-1-propanesulfonic acid) and PEM 6 (polyethylene glycol monomethacrylate) and also 78 g of diethyl phthalate are added, and the speed is increased to 1600 rpm. Then amidosulfonic acid (15%) is added to lower the pH to 6.1. After about 2 minutes, a stable capsule size of around 30 μm is established. At a lower speed (800 rpm), the capsules are cured at 55°C for 1 h and 80°C for 3 h. In the course of the curing, 4 g of melamine are added to the batch, and in the last hour of curing the pH is held at 9-11 by means of aqueous sodium hydroxide solution (20%).

Technical data of the microcapsules obtained:

Diameter D(90): 28 μ m
Solids: 46.4%
Core fraction: 74.8%
Efficiency: 97%
5 Powder yield: 50%
Residual aldehyde
content: < 500 ppm, determined by GC (FT-IR)

**Example 4: General synthesis instructions for
10 terpolymers**

495.0 g of monomer 1 (AMPS or AMPP) and 7.5 g of
monomer 2 (meth/acrylate monomer) and 898 g of
demineralized water are transferred as an initial
charge into a double-wall glass reactor. The initial
15 charge is briefly mixed and then gassed with argon for
10 minutes. The reaction mixture is subsequently heated
to 75°C and started with an initiator solution (0.75 g
in 15 g of water). When the maximum temperature has
been reached in the reactor, monomer 2 (37.5 g) and
20 monomer 3 (third monomer) (15 g) are metered in over
the course of an hour using a peristaltic pump or a
syringe pump. Following the metered addition, there is
an hour of after-reaction, after which the aqueous
polymer solution obtained is cooled. When the
25 temperature in the reactor is below 40°C, 1.5 g of
preservative are added, and the homogeneous product is
discharged.

**Example 5: AMPS-polyalkylene glycol monomethacrylate-N-
30 vinylcaprolactam**

The initial charge consists of 883 g of demineralized
water, 525 g of AMPS, 7.5 g of PEM63PHD, and 15 g of
N-vinylcaprolactam. The mixture is placed under an
inert gas atmosphere and is heated to 75°C with
35 stirring (250 rpm). 0.75 g of sodium peroxodisulfate is
dissolved in 15 g of water and injected into the
reactor using a syringe. When the temperature has
reached a maximum and is beginning to fall, 15 g of
N-vinylcaprolactam with 37.5 g of PEM63PHD are metered

in over a period of one hour using a syringe pump. This is followed by a half-hour after-reaction. Thereafter the batch is cooled to room temperature and admixed with 1.5 g of preservative.

5

The aqueous solution is characterized by the viscosity, solids content, and pH. The viscosity is 1800 mPas (measured at 20 rpm Brookfield), the solids content is 22.1%, and the pH is 3.5. 3 g of terpolymer are applied to a Petri dish and dried in a drying cabinet at 160°C for 24 hours. The final mass is 0.67 g and corresponds to a yield of 22.3%.

10

Claims

1. Microcapsules whose capsule walls comprise a resin
which is obtainable by reacting
 - 5 a) at least one compound selected from the group
of
 - a1) amines and
 - a2) aromatic or heteroaromatic compounds which
are unsubstituted or substituted by one or
10 more substituents from group C₁-C₂₀ alkyl,
OH, OR, COOH, SH, SR, NHCOR, OCOR, halogen
and aromatic, where R represents a C₁-C₁₀
alkyl group,
with
 - 15 b) at least one aldehydic component which has at
least two C atoms per molecule, in the presence
 - c) of at least one copolymer which comprises units
of 2-acrylamido-2-methylpropanesulfonic acid or
its salts (AMPS) and/or 2-acrylamido-2-
20 methylpropanephosphonic acid or its salts
(AMPP) and units of one or more
(meth)acrylates.
2. The microcapsules as claimed in claim 1, wherein
25 one or more amines having at least two amine
groups per molecule are selected as component a).
3. The microcapsules as claimed in claim 1 or 2,
wherein one or more compounds from the group of
30 ureas, melamines, and benzoguanamines are selected
as component a).
4. The microcapsules as claimed in claim 1, wherein
one or more aromatic or heteroaromatic alcohols
35 and/or one or more aromatic or heteroaromatic
carboxylic acids are selected as component a).

5. The microcapsules as claimed in claim 1 or 4, wherein an aromatic alcohol or ether thereof or derivative thereof is selected as component a).
- 5 6. The microcapsules as claimed in either of claims 4 and 5, wherein the at least one aromatic alcohol has at least two aromatically attached free hydroxyl groups per molecule.
- 10 7. The microcapsules as claimed in any of claims 4 to 6, wherein the at least one aromatic alcohol is selected from the phenols having two or more hydroxyl groups, preferably from pyrocatechol, resorcinol, hydroquinone, and 1,4-naphthohydroquinone, phloroglucinol, pyrogallol, and hydroxyhydroquinone, more preferably resorcinol and phloroglucinol.
- 15 8. The microcapsules as claimed in any of claims 4 to 7, wherein the alcohols are present in the form of their salts, ethers or esters and the carboxylic acids are present in the form of their salts or esters.
- 20 9. A microcapsule wherein component a) comprises a mixture of a1) one or more amines, defined as in any of claims 1 to 3, and a2) one or more aromatic or heteroaromatic compounds, defined as in any of claims 1 and 4 to 8.
- 25 10. The microcapsules as claimed in any of the preceding claims, wherein the aldehydic component b) is selected from the aliphatic and aromatic aldehydes.
- 30 11. The microcapsules as claimed in any of the preceding claims, wherein the aldehydic component is selected from valeraldehyde, caproaldehyde, caprylaldehyde, decanal, succinaldehyde,
- 35

cyclohexanecarbaldehyde, cyclopentanecarbaldehyde,
 2-methyl-1-propanal, 2-methylpropionaldehyde,
 acetaldehyde, acrolein, aldosterone, antimycin A,
 8'-apo- β -caroten-8'-al, benzaldehyde, butanal,
 5 chloral, citral, citronellal, crotonaldehyde,
 dimethylaminobenzaldehyde, folic acid,
 fosmidomycin, furfural, glutaraldehyde,
 glyceraldehyde, glycolaldehyde, glyoxal, glyoxylic
 acid, heptanal, 2-hydroxybenzaldehyde, 3-
 10 hydroxybutanal, hydroxymethylfurfural,
 4-hydroxynonenal, isobutanal, isobutyraldehyde,
 methacrolein, 2-methylundecanal, mucochloric acid,
 N-methylformamide, 2-nitrobenzaldehyde, nonanal,
 octanal, oleocanthal, orlistat, pentanal,
 15 phenylethanal, phycocyanin, piperonal, propanal,
 propenal, protocatechualdehyde, retinal,
 salicylaldehyde, secologanin, streptomycin,
 strophanthidin, tylosin, vanillin, and
 cinnamaldehyde.

20

12. The microcapsules as claimed in any of the
 preceding claims, wherein the at least one
 aldehydic component has at least two free aldehyde
 groups per molecule.

25

13. The microcapsules as claimed in any of the
 preceding claims, wherein the aldehydic component
 is selected from glutaraldehyde and/or
 succinaldehyde.

30


14. The microcapsules as claimed in any of the
 preceding claims, wherein the copolymer is a
 bipolymer or a terpolymer.

35


15. The microcapsules as claimed in any of the
 preceding claims, wherein the copolymer c) is
 constructed from units of AMPS or AMPP, preferably
 AMPS, and one or more (meth)acrylates.

16. The microcapsules as claimed in claim 1 or 15, wherein the (meth)acrylates in copolymer c) are selected from the group of


5 a) 4-hydroxybutyl acrylate

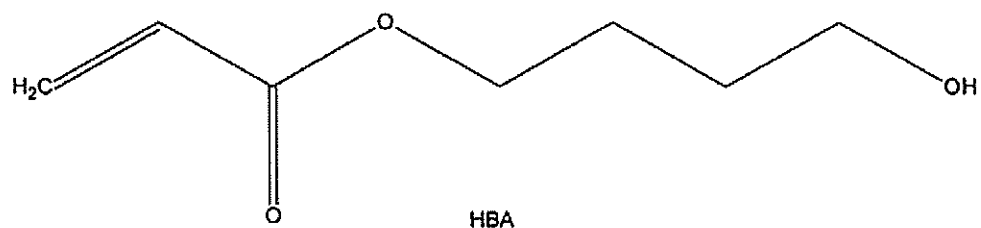


10 b) 2-hydroxypropyl methacrylate

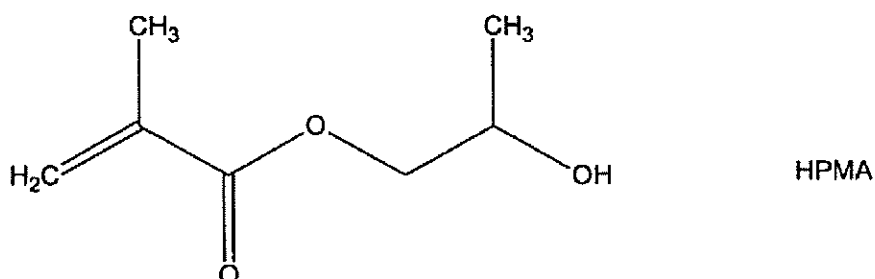


c) ammonium sulfatoethyl methacrylate

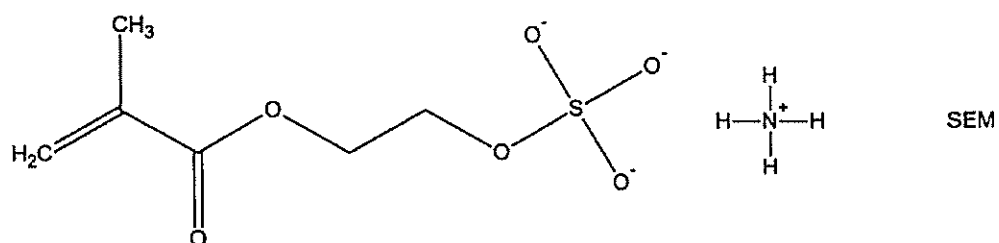

15 d) pentapropylene glycol methacrylate

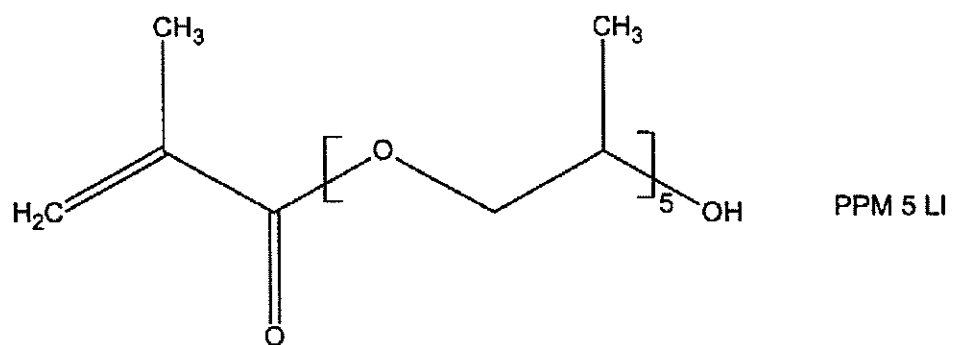


e) acrylic acid

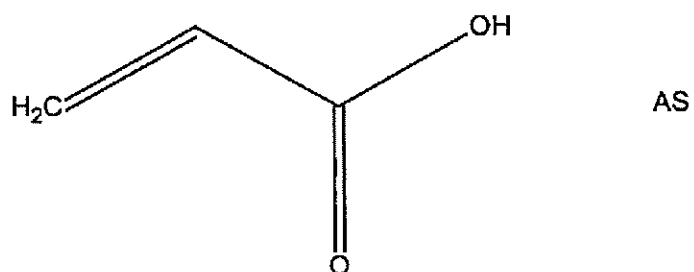


5

f) hexaethylene glycol methacrylate

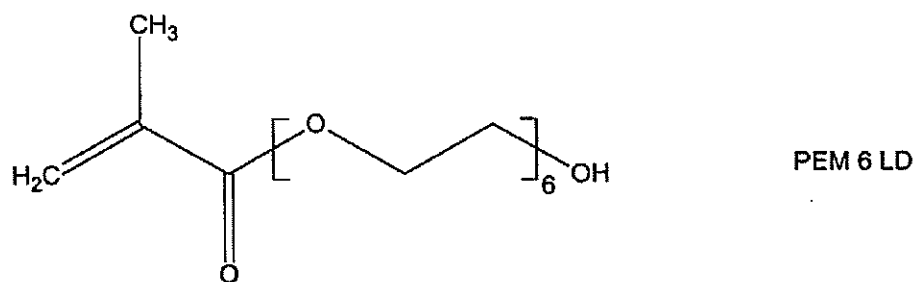


10

g) hexapropylene glycol acrylate

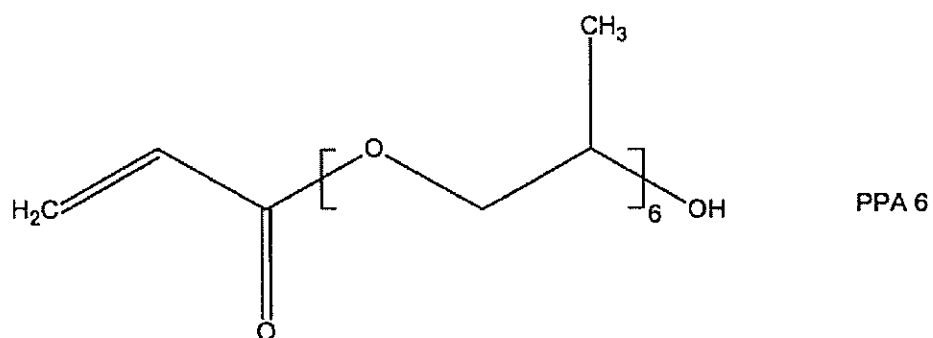

15


h) hexaethylene glycol acrylate

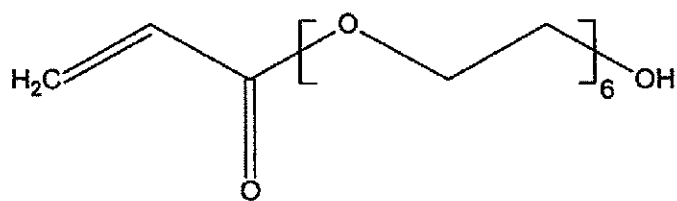

PEA 6

i) hydroxyethyl methacrylate


5

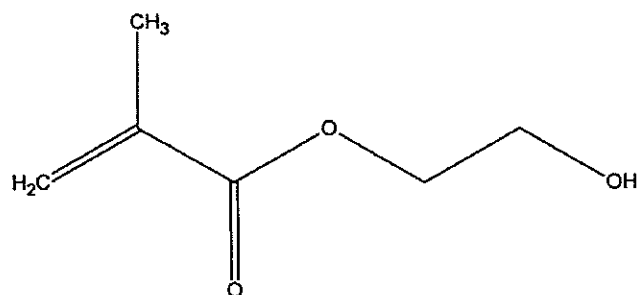

HEMA


j) polyalkylene glycol methacrylate (CAS No. 589-75-9)

10

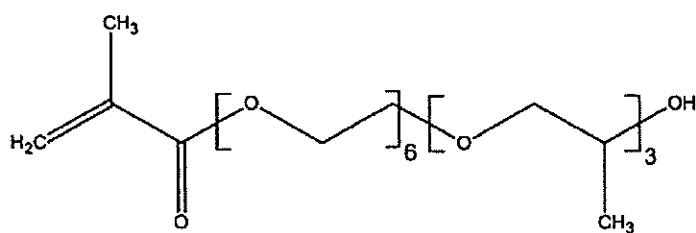

Bisomer PEM63PHD


k) methoxy-polyethylene glycol methacrylate

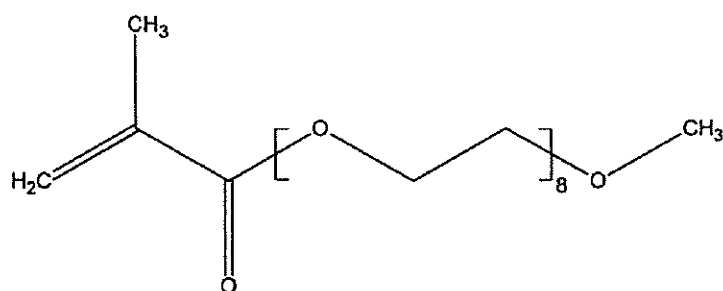


MPEG 350MA

15


l) 2-propylheptyl acrylate (2-PHA)

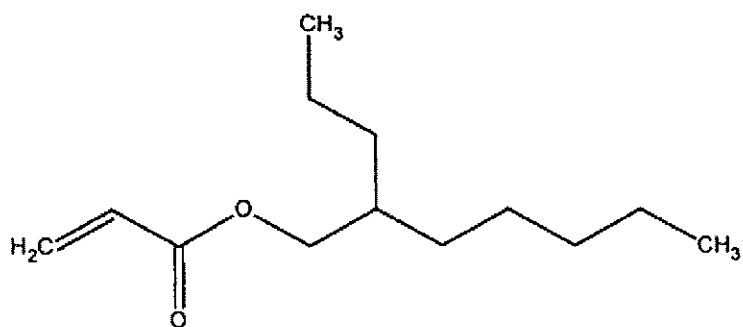


m) 1,3-butanediol dimethacrylate (BDDMA)

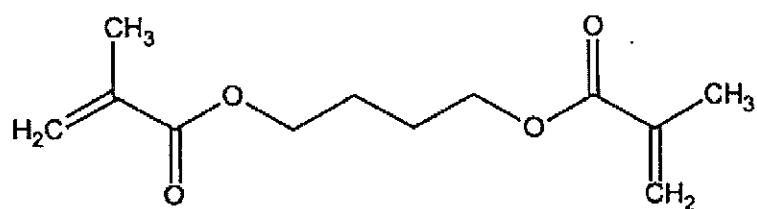

n) triethylene glycol dimethacrylate (TEGDMA)

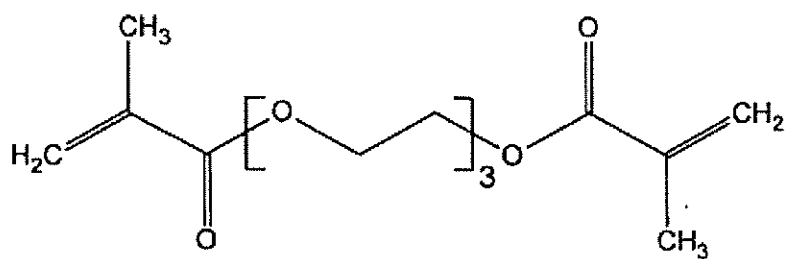


o) hydroxyethyl acrylate (HEA)

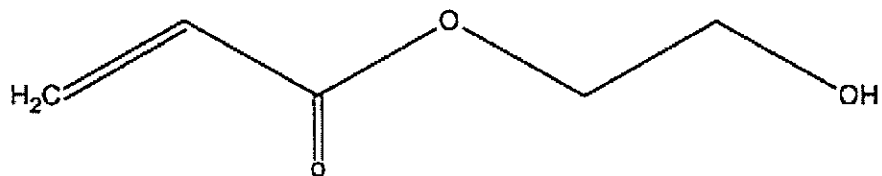


p) 2-hydroxypropyl acrylate (HPA)

CC(=C)C(=O)OCCOCC(=O)C(=C)CCC(=O)OCC1OC1CC(=C)C(=O)OCC=CCC(=C)C(=O)OCCOCCO

u) Bisomer IDMA (isodecyl methacrylate)

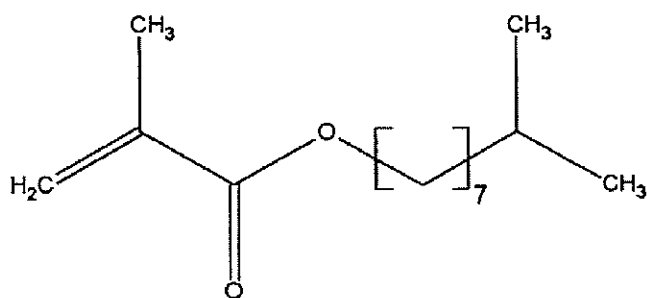


5 v) Bisomer C13MA (isotridecyl methacrylate)

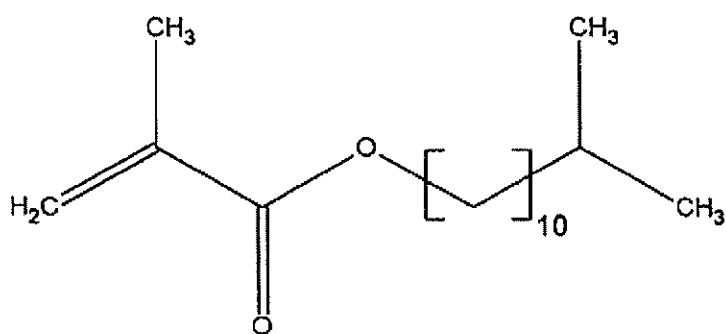

w) 3-sulfopropyl acrylate


10

x) N-(2-acryloyloxyethyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

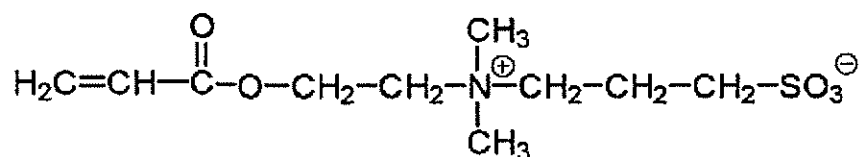


15

y) N-(2-methacryloyloxyethyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

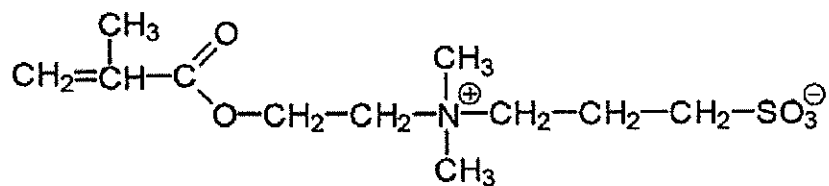

z) 3-sulfopropyl methacrylate,

z1) N-(3-methacrylamidopropyl)-N,N-dimethyl-N-(3-sulfopropyl) ammonium betaine



17. The microcapsules as claimed in any of the preceding claims, wherein the copolymer c) comprises one or more further monomers selected from the group of vinyl compounds, unsaturated dicarboxylic or polycarboxylic acids, and the salts of amyl compounds or allyl compounds.
18. The microcapsules as claimed in any of the preceding claims, wherein the molar ratio of the at least one component a) to the at least one aldehydic component b) is between 1:1 and 1:5, preferably between 1:1 and 1:3.
19. The microcapsules as claimed in any of the preceding claims, wherein the capsule surface is aftertreated with a nitrogen-containing, oxygen-containing or silicon-containing agent, preferably with melamine, with silica gel or with aromatic alcohol a).
20. The microcapsules as claimed in any of the preceding claims, wherein at least one core material is enclosed in the capsule.
21. The microcapsules as claimed in any of the preceding claims, wherein the capsule is formaldehyde-free.

22. A microcapsule dispersion comprising one or more microcapsules as claimed in any of the preceding claims.
- 5 23. The use of a copolymer c) as defined in any of claims 1 and 14 to 17 for reacting one or more amines a1), defined as in any of claims 1 to 3, and/or one or more aromatic or heteroaromatic compounds a2), defined as in any of claims 1 and 4
10 to 8, with an aldehydic component b), defined as in any of claims 10 to 13, for forming the capsule walls of microcapsules.
- 15 24. A method for producing microcapsules as claimed in one or more of claims 1 to 21 or microcapsule dispersions as claimed in claim 22, wherein
a) one or more amines a1), defined as in any of claims 1 to 3, and/or one or more aromatic or heteroaromatic compounds a2), defined as in any of
20 claims 1 and 4 to 8, are combined and reacted with an aldehydic component b), in the presence of a copolymer c) as defined in any of claims 1 and 14 to 17, optionally in the presence of a core material, and
25 b) later by temperature increase the curing of the capsules takes place.
- 30 25. The method for producing microcapsules or microcapsule dispersions as claimed in claim 24, wherein the pH is changed in the course of the method.
- 35 26. The method for producing microcapsules or microcapsule dispersions as claimed in one or both of claims 24 and 25, wherein the alkalinity is adjusted using an alkali metal salt, preferably alkali metal carbonate, more preferably sodium carbonate.

27. The method for producing microcapsules or microcapsule dispersions as claimed in any of claims 24 to 26, wherein stirring is carried out during the reaction of component a) with the aldehydic component b) and the copolymer c).
28. The method for producing microcapsules or microcapsule dispersions as claimed in one or both of claims 26 and 27, wherein the stirring speed is increased immediately before or during the raising of the alkalinity.
29. The method for producing microcapsules or microcapsule dispersions as claimed in claim 28, wherein the increased stirring speed is retained until the viscosity values of the mixture fall, the stirring speed being lowered after onset of a viscosity decrease.
30. The method for producing microcapsules or microcapsule dispersions as claimed in claim 29, wherein after the beginning of the viscosity decrease, stirring is continued for at least 20 minutes and preferably between 30 and 180 minutes, before the curing of the capsules while temperature increase takes place.
31. The use of microcapsules as claimed in one or more of claims 1 to 21 or of microcapsule dispersions as claimed in claim 22 for the release of hydrophilic or hydrophobic active ingredients, preferably selected from the group of fragrances, flavors, colors, latent heat storage materials, solvents, catalysts, coating systems, reactive (meth)acrylates, ene components, active antimicrobial ingredients, lubricants, glidants, active pharmaceutical ingredients, active cosmetic ingredients, self-healing agents, waxes, and


pesticides such as fungicides, herbicides or insecticides.

32. Products comprising microcapsules as claimed in one or more of claims 1 to 21 or microcapsule dispersions as claimed in claim 22.


33. The use of products as claimed in claim 32 in at least one area of application selected from the fields of coatings, paint technology, construction chemicals, catalyst technology, corrosion control, dental technology, self-healing systems, cosmetics, pharmacy, laundering, cleaning, disinfecting, adhesive bonding, treatment of plants, preferably as fungicide, pesticide, insecticide or herbicide, or medical technology.

34. A copolymer comprising units derived from AMPS and one or more methacrylates from the group of


Bisomer PEM 3 (polyethylene glycol methacrylate)

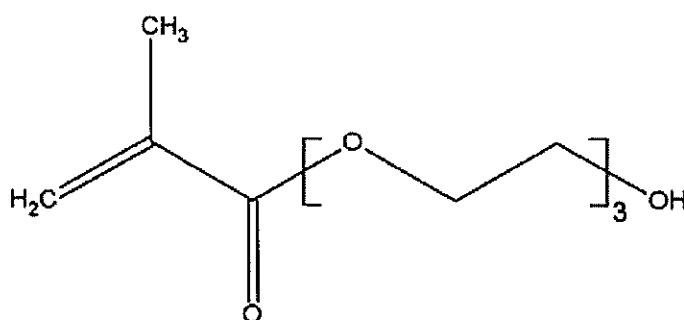

Bisomer IDMA (isodecyl methacrylate)

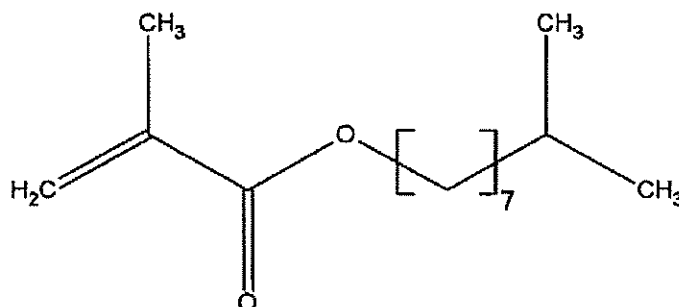

Bisomer C13MA (isotridecyl methacrylate)

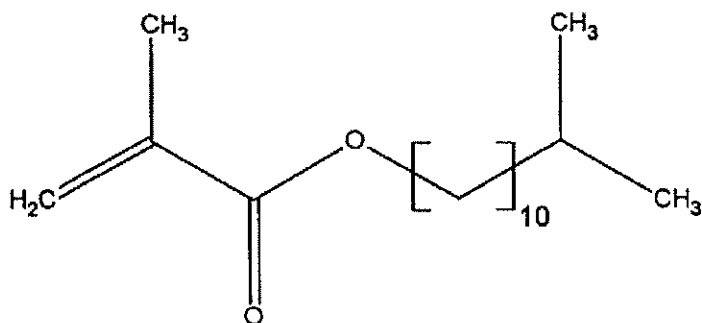


5

3-sulfopropyl acrylate,


N-(2-acryloyloxyethyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

10



N-(2-methacryloyloxyethyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

15

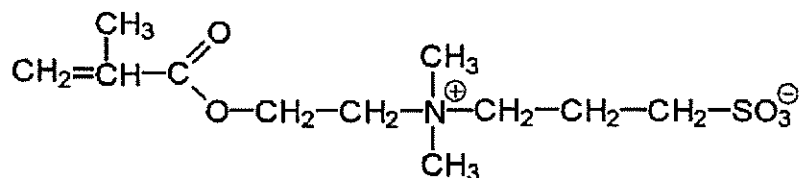

3-sulfopropyl methacrylate,

20

and

N-(3-methacrylamidopropyl)-N,N-dimethyl-N-(3-sulfopropyl)ammonium betaine

