



✉ EPA/EPO/OEB
D-80298 München
☎ (0 89) 2399-0
Tx 523 656 epmu d
FAX 089/2399-4465

Europäisches
Patentamt

Generaldirektion 2

European
Patent Office

Directorate General 2

Office européen
des brevets

Direction générale 2

Preece, Michael
BP International Limited
Patents and Agreements Division
Sunbury Research Centre
Chertsey Road
Sunbury-on-Thames,
Middlesex TW16 7LN
GRANDE BRETAGNE

Received in PAT
28 MAR 1995



1. Do you want to proceed to grant? **YES**
2. Please check that the attached spec is complete and accurate as agreed with EPO **YES** *to minor amendments approval letter*

Application No./Patent No. 91302768.6-2104	Ref. ADD 7288COG	Date 7.03.95
Applicant/Proprietor BP CHEMICALS (ADDITIVES) LIMITED		

Communication under Rule 51(4) EPC

Patents Review Meeting of 16/12/93 resolved to abandon before grant European designations in Austria, Spain, Switzerland, Greece and Denmark. Translations will not therefore be required for those countries.

You are hereby informed that the Examining Division intends to grant a European patent on the basis of the above application with the text and drawings as indicated below:

Designated state(s): AT BE CH LI DE DK ES FR GB GR IT NL SE

Description, page(s):

1-22 received on 25.10.1994 with letter of 18.10.1994

Claim(s), No(s):

1-18 received on 25.10.1994 with letter of 18.10.1994

Drawing(s), sheet(s):

1/3-3/3 as originally filed

A copy of the relevant documents is enclosed.

The title of the invention in the three official languages of the European Patent Office, the international patent classification, the designated Contracting States and the registered name of the applicant are shown on the attached EPO Form 2056.

You are requested to state your approval of the text specified above within four months of this notification. Failure to do so will result in refusal of the application under Article 97(1) EPC (Rule 51(5) EPC).

Your attention is drawn to the notice of the president of the EPO of 22.10.1991 - measure 7 - (OJ EP 12/1991).

Further information concerning the acceptability of amendments or the filing of a separate set of claims for one or more designated Contracting States that have entered a reservation under Article 167(2)(a) EPC will be found in the Guidelines for Examination in the EPO, C-VI, 4.8 to 4.10 and C-VI 15.1.2 to 15.1.4

Registered letter



Date

Sheet 2

Application No.: 91302768.6



H. Duyfjes
Formalities Officer
Tel.No.: (089) 2399-8043

Enclosures: EPO Form 2056
30 Copies of the relevant documents

Registered letter



✉ EPA/EPO/OEB
D-80298 München
☎ 089/2399-0
TX 523 656 epmu d
FAX 089/2399-4465

Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Generaldirektion 2

Directorate General 2

Direction Générale 2

Preece, Michael
BP International Limited
Patents and Agreements Division
Sunbury Research Centre
Chertsey Road
Sunbury-on-Thames,
Middlesex TW16 7LN
GRANDE BRETAGNE

Datum/Date

Zeichen/Ref./Réf.

ADD 7288COG

Anmeldung Nr./Application No./Demande n°./Patent Nr./Patent No./Brevet n°.

91302768.6-2104

Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire

BP CHEMICALS (ADDITIVES) LIMITED

For the intended grant of a European patent, (1) the title of the invention in the three official languages of the European Patent Office, (2) the International Patent Classification and (3) the designated Contracting States and the applicant's registered name, address and country of residence or principal place of business are set out below.

(1)

- Schmieröladditive, ihre Herstellung und ihre Verwendung
- Lubricating oil additives, their preparation and use
- Additifs pour huile lubrifiante, leur préparation et leur utilisation

(2) CLASS STRING: C10M133/08, C10M133/16, C10M133/52, C10M159/12,
C10M159/16, C08F8/00, C08F10/00, C07D207/404, //
(C10M159/12, 129:18, 133:52, 133:56), C10N30:04,
C10N60:06, C10N70:00

(3) AT-BE-CH-DE-DK-ES-FR-GB-GR-IT-LI-NL-SE


BP CHEMICALS (ADDITIVES) LIMITED
Britannic House 1 Finsbury Circus
London EC2M 7BA/GB

- 1 -

PROCESS FOR THE PRODUCTION OF LUBRICATING OIL ADDITIVES
AND THEIR USE

The present invention relates generally to a process for the preparation of oil soluble dispersant additives which are comprised of the reaction product of a dispersant having at least one reactive nitrogen containing moiety and a polyepoxide.

5 The reaction of mono-epoxides with dispersants to attach hydroxyalkyl residues thereto and thereby improve their dispersancy properties has been described in for example US Patents Nos. 3,373,111 and 4,798,612. Typically, US Patent No. 3,373,111 discloses a process for preparing oil-soluble, nitrogen-containing
10 compositions by treating an acylated amine with at least 0.2 equivalent of an organic epoxide at a temperature within the range from about 50°C to the decomposition temperature, said acylated amine being prepared by reacting at a temperature above about 80°C an alkylene amine with from about 0.2 to 2 equivalents of an
15 acid-producing compound selected from the class consisting of (a) substituted succinic acids having the structural formula:



wherein R is a hydrocarbon radical having at least about 50
20 aliphatic carbon atoms, (b) monocarboxylic acids having the structural formula:



wherein R¹ is a branched-chain hydrocarbon radical having from about 12 to about 50 aliphatic carbon atoms in the principal chain and at
25 least one aliphatic substituent aryl pendant group, (c) mixtures of

succinic acids of (a) and monocarboxylic acids selected from the class consisting of the monocarboxylic acids of (b) and aliphatic monocarboxylic acids having from about 12 to about 50 carbon atoms, and (d) the esters and anhydrides of said acids.

5 The reaction of polyepoxides with dispersants to produce dispersants having enhanced low temperature viscometric properties is also known from EP-A-0317353. Disclosed therein is an oil soluble dispersant useful as an oleaginous composition additive comprising the reaction products of:-

- 10 (1) at least one nitrogen or ester containing adduct selected from the group consisting of (i) oil soluble salts, amides, imides, oxazolines, esters, or mixtures thereof of long-chain hydrocarbyl substituted mono- and dicarboxylic acids or their anhydrides, (ii) long-chain hydrocarbons having a polyamine attached directly
15 thereto, and (iii) Mannich condensation product formed by condensing a long chain hydrocarbyl substituted hydroxy aromatic compound with an aldehyde and a polyalkylene polyamine, said adduct containing at least one reactive group selected from reactive amino groups and reactive hydroxyl groups; and
20 (2) at least one polyepoxide.

Preferred polyepoxides for use in the reaction are said to be the diepoxides, ie those containing two oxirane rings. The polyepoxides are reacted with the acylated nitrogen derivatives of hydrocarbyl substituted dicarboxylic acids in a single step reaction.

25 We have found that improved dispersants having desirable viscosity index improver properties result when aliphatic polyepoxides are reacted with a dispersant having at least one reactive nitrogen-containing moiety in at least two sequential steps.

30 Accordingly, the present invention provides a process for the production of a lubricating oil soluble compound suitable for use as a dispersant additive by a process which comprises reacting at elevated temperature a polyepoxide with a dispersant having at least one reactive nitrogen-containing moiety characterised in that the
35 polyepoxide is an aliphatic polyepoxide and that the polyepoxide is

reacted with the dispersant in at least two sequential steps, wherein in a first step a first portion of dispersant is reacted with the polyepoxide, at least 0.75 equivalents of polyepoxide being used for each reactive $>N-H$ group present in the dispersant, and in
5 a subsequent step or steps at least one further portion of dispersant is reacted with the product of the preceding step, there being added from 0.5 to 15 equivalents of dispersant per equivalent of dispersant used in the first step.

Any dispersant having at least one reactive nitrogen-containing
10 moiety may be employed. Thus dispersants having primary and/or secondary amino groups may be employed but not those containing exclusively tertiary amino groups. Dispersants having at least 2 reactive nitrogens are preferred, more preferably they contain 3 to 7 such nitrogens. It is believed, though we do not wish to be bound
15 by any theory, that reaction is between the reactive nitrogens of the dispersant and the oxirane ring of the polyepoxide to open the oxirane rings in a manner whereby different molecules of the dispersant are cross-linked by the polyepoxide molecules.


Any dispersant having at least one reactive nitrogen -
20 containing moiety may be employed. Suitable dispersants include (i) oil-soluble amides or imides of long-chain hydrocarbyl-substituted mono- and dicarboxylic acids or their anhydrides, (ii) long-chain hydrocarbons having a polyamine attached directly thereto, and (iii) Mannich condensation products formed by condensing a long-chain
25 hydrocarbyl-substituted hydroxy aromatic compound, for example an alkyl phenol, with an aldehyde and a polyalkene polyamine, which adduct contains at least one reactive amino group.

The dispersant is preferably an imide or amide formed by the reaction of a polyalkene substituted succinic acylating agent and an
30 amine.

Succinimides are a well-known class of dispersant. Typical of the art relating to such materials is GB-A-1565627 and the prior art acknowledged therein. Typically, they are prepared by reacting a polyalkene, in the presence or absence of chlorine, with either
35 maleic acid, or preferably maleic anhydride, to produce a

polyalkene-substituted succinic acid or anhydride and thereafter reacting the polyalkene-substituted succinic acid or anhydride with a nitrogenous material, suitably an amine, which may be a mono-, di- or polyamine.

5 A suitable succinimide has the formula:-

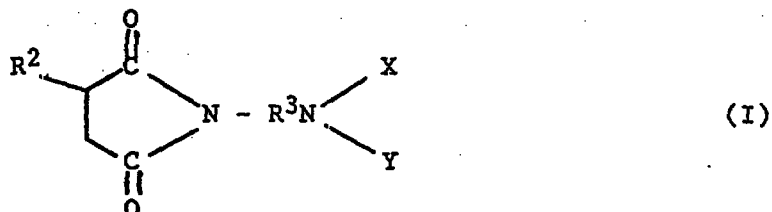

10

wherein R^2 is a hydrocarbyl group, typically a polyolefin group; R^2 preferably contains between 30 and 300 carbon atoms, more preferably between 50 and 150 and R^3 is a divalent group such that H_2NR^3NXY is an alkylene amine, such as an ethylene or propylene amine eg R^3 is $-(CH_2CH_2NH)_kCH_2CH_2$ where k is zero or an integer from 1 to 7, preferably 2 to 6; alternatively a mixed ethylene/propylene amine e.g. $H_2N(CH_2)_3NH(CH_2)_2NH(CH_2)_3NH_2$ can be used. X and Y are independently either hydrogen, alkyl, or hydroxy alkyls, each of 1 - 6 carbons eg methyl, ethyl, or hydroxyethyl, or together form the group:-

20



25

Alternatively, R^3 in the formula (I) may be a divalent group such that H_2NR^3NXY is an alkanolamine or polyether amine. Typically, such alkanolamines may contain the group $=N.CH_2CH_2NH.CH_2CH_2OH$ (i.e. $R^3=CH_2CH_2$, $X=H$, $Y=CH_2CH_2OH$) and typically such polyether amines may contain the group $=NCH_2CH_2OCH_2CH_2.OCH_2CH_2NH_2$ (i.e. $R^3=(CH_2CH_2O)_2CH_2CH_2$, $X=Y=H$). Useful commercially available polyether amines are the Jeffamines (RTM) marketed by Texaco. R^3 is preferably an alkylene group eg of 2 to 40 carbons, optionally interrupted with at least one $-O-$ or $>NH$ group and in particular contains one or more units of alkylene oxa

30

35

or alkylene amino groups each of 2 - 4 carbons.


R^3 may also be a divalent group such that H_2NR^3NXY is an aromatic or araliphatic amine eg of 6 - 20 carbons, such as phenylene or biphenylene diamine or bis (amino benzyl).

5 Suitably in the formula (I) R^2 is derived from either ethylene, propylene, 1-butene, isobutene, 1-hexene, 1-octene and the like. Alternatively, the polyalkene may be derived from an internal olefin, e.g. 2-butene, or an interpolymer, eg an ethylene/propylene copolymer. Preferably the polyalkene is a polyisobutene.

10 The succinimide may be either a mono- or a bis-succinimide.

For the purposes of this invention the term polyepoxide is taken to mean a compound comprising at least 2 oxirane rings.

The polyepoxides suitable for use in the process of the invention are aliphatic. Preferred polyepoxides contain up to four
15 oxirane rings. More preferred are diepoxides, ie containing two oxirane rings per molecule. Examples of suitable aliphatic polyepoxides are described in the aforesaid EP-A-0.317 353. Suitably the diepoxides may be those of the formula:-



where $q = 0$ or 1 , R^6 is a divalent aliphatic hydrocarbyl or hetero-substituted aliphatic hydrocarbyl group, for example an alkylene, cycloalkylene eg of 5 - 10 carbons, or alkenylene group eg of 2 - 20 carbons, R^6 can optionally contain up to 3 oxirane rings. R^4 and R^5
25 are independently either hydrogen or aliphatic hydrocarbyl groups, for example alkyl or alkenyl groups, preferably alkyl groups. Where R^4 or R^5 is a hydrocarbyl group it is preferably a C_1 to C_6 more preferably a C_1 to C_3 group for example a methyl or an ethyl group. It is preferred that R^4 and R^5 are independently
30 hydrogen or a methyl group.

When R^6 is an alkylene eg of 1 - 300 carbons, it is suitably of the formula $-[CHR_b]_r-$ where R_b is hydrogen or a C_1 - C_{20} preferably a C_1 - C_6 group, more preferably methyl or ethyl; r is an integer from 1 to 30 eg 1 - 8, preferably 1 to 6; each of the groups $-[CHR_b]$ is the
35 same or different. The group R^6 is suitably derived from a

polyolefin e.g. polyethylene.


When R^6 is a hetero eg 0 - substituted aliphatic hydrocarbonyl group, the polyepoxide will typically be prepared by reaction of a diol (e.g. 1,4 butanediol, 2,2-dimethyl-1,3-propane diol) or a glycol (e.g. polyethylene, polypropylene or polybutene glycols) with epichlorohydrin or the corresponding dichloride with glycidol.

Examples of suitable diepoxides are 1,4-butane diol diglycidyl ether, 1,6-hexane diol diglycidyl ether, polypropylene oxide diglycidyl ether, and 2,2-dimethyl-1,3- propane diol diglycidyl ether (neopentenyl diglycidyl ether).

Many aliphatic diepoxides suitable for use in the present invention are available commercially.

R^6 can also be an alkylene or alkylene glycol group optionally substituted with at least one eg 1 - 4 groups of the formula

15



where R_a is an alkylene group eg of 1 - 4 carbons such as CH_2 or alkylene glycol group eg of 2 - 40 carbons and at least 2 oxygens; R^4 is as defined above; j is zero or 1.

Examples of suitable polyepoxides having an R^6 group as defined above are glycerol triglycidyl ether and pentaerythritol tetraglycidyl ether.

It is believed that cross-linking of the dispersant is accomplished in a manner which enhances the viscometric properties when reaction with the polyepoxide is effected in at least two sequential steps.

The reaction of the dispersant with the polyepoxide comprises in a first step reacting dispersant at elevated temperature with polyepoxide, and in a further step or steps reacting the product from the preceding step or steps at elevated temperature with further dispersant.

It will be appreciated that in the subsequent sequential step or steps involving the addition of further dispersant, a different dispersant or dispersants to that used in the first step may be

employed.

The reaction of the dispersant with the polyepoxide of the present invention is accomplished in two sequential steps. Suitably, for example (i) dispersant and polyepoxide are mixed at a
5 temperature in the range from ambient to 120°C, (ii) the temperature of the mixture is then adjusted, if necessary, to a value above 70°C and below the decomposition temperature of the components of the mixture for a period, for example, from 10 to 180 minutes, (iii) the mixture is maintained at this temperature for a period of, for
10 example, from 15 to 300 minutes, (iv) a further portion of dispersant is mixed with the product of (iii) at a temperature in the range from 15 to 220°C (v) the temperature of the mixture is then adjusted, if necessary, to a value in the range from 70 to 250°C and (vi) the mixture is maintained at this temperature for a
15 period of, for example, 15 to 300 minutes.

As regards the amounts of dispersant and polyepoxide to be employed, at least 0.75, suitably 0.75 to 1.1, more preferably 0.8 to 0.95 equivalents of polyepoxide, are generally used for each amino hydrogen present in the dispersant in the first step.
20 Thereafter, in a sequential step or steps, from 0.5 to 15, preferably from 1.0 to 10.0, equivalents of dispersant per equivalent of dispersant used in the first step are added.

In a preferred embodiment of the present invention, a proportion of the dispersant is reacted with polyepoxide in two
25 portions; in a first step (i) the first portion of dispersant is reacted with a polyepoxide, the product of this first step (i) being subsequently reacted in a second step (ii) with a compound (A) having at least two amino hydrogens. Reaction of the second portion of the dispersant can be effected at the same time as reaction of
30 compound (A) with the product of the aforementioned first step (i); in this case compound (A) and the second portion of the dispersant can suitably be blended prior to reaction. Alternatively, in a particularly preferred embodiment reaction of the second portion of dispersant can be effected after reaction of compound (A) with the
35 product of the aforementioned first step (i). In this latter case


the process comprises at least 3 steps.

Compound (A) is suitably of a lower molecular weight than the dispersant. Typically the molecular weight of compound (A) is in the range 32-1,000.

5 The amino hydrogens of compound (A) may be bonded to the same nitrogen atom (as in for example $\text{H}_2\text{N}-\text{CH}_2\text{CH}_2-\text{NMe}_2$) or may be bonded to two (or more) different nitrogen atoms (as in for example $\text{MeNH}-\text{CH}_2\text{CH}_2-\text{NHMe}$). Compound (A) may be a polyamine; alternatively compound (A) may be an amine-terminated polyalkylene glycol (the polyalkylene glycol may be amine terminated at one end e.g. $\text{H}_2\text{N}(\text{CH}_2\text{O})_n\text{CH}_2\text{OH}$ or amine-terminated at both ends e.g. $\text{H}_2\text{N}(\text{CH}_2\text{O})_n\text{CH}_2\text{NH}_2$), an alcoholamine e.g. $\text{H}_2\text{N}-\text{CH}_2\text{CH}_2-\text{OH}$, a polyoxyalkylene amine e.g. $\text{H}_2\text{N}(\text{CH}_2\text{OCH}_2\text{NH})_n\text{CH}_2\text{NH}_2$; in each case $n=1$ to 20, preferably 1 to 10, more preferably 1 to 4. The
10
15 amine - terminated polyalkylene glycol, alcoholamine and polyoxyalkylene amine may be derived from ethylene oxide, propylene oxide or mixed oxides.

Alternatively compound (A) can be a monoamine provided that the amine is a primary amine e.g. $\text{H}_2\text{N}(\text{CH}_2)_5\text{CH}_3$. Compound (A) is
20 preferably a diamine e.g. ethylene diamine dimethyl amino propylamine, a triamine or a tetramine e.g. tris(amino ethyl) amine, or a polyoxyalkylene amine containing a primary amino group attached to the terminus of a polyether backbone where the polyether backbone is based on propylene oxide, ethylene oxide or mixed
25 propylene/ethylene oxides.

Products of step (i) comprise a novel compound of the general formula




wherein R^8 and R^9 are independently a divalent aliphatic, hetero-substituted aliphatic, aromatic or hetero-substituted aromatic group, eg as defined by R^3 and with any aromatic groups containing 6 - 20 carbons,


35

R^7 and R^{10} are independently a hydrocarbyl group,

or

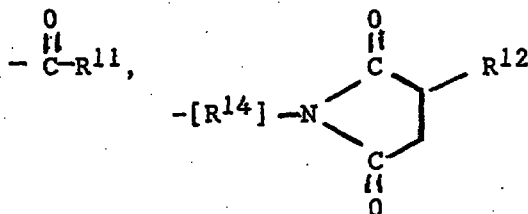

5



10

or the group Y^1

wherein Y^1 is $CR^1R^4 - \overset{\overset{R^{11}}{|}}{CH(R^6)}_q \overset{\overset{O}{\diagup}}{CH} - \overset{\underset{\diagdown}{O}}{CHR^5}$ where one of R^1 and R^{11} is hydrogen and the other is a hydroxyl group, wherein R^{11} , R^{12} and R^{13} are independently a monovalent aliphatic or hetero eg 0 -

15 substituted aliphatic group, eg as defined for R^3 ,

R^{14} is an alkylene or hetero (eg 0) - substituted alkylene group.

R^6 is a divalent aliphatic or hetero (eg 0) - substituted aliphatic group optionally comprising up to 2 oxirane rings, or as

20 further described for R^6 above,

R^4 and R^5 are independently hydrogen or a hydrocarbyl group as defined hereinabove,

x , and y are independently zero or an integer from 1 to 10, and q is zero or 1,

25 each R^8 group, each R^9 group and each Y^1 group is the same or different.

R^8 and R^9 are independently a divalent aliphatic; hetero-substituted aliphatic, aromatic or hetero-substituted aromatic group. Where R^8 or R^9 is an aliphatic group eg hydrocarbyl

30 of 1 - 300 carbons it is suitably of the formula $[CHR^{15}]_m$ where R^{15} is hydrogen or a C_1 - C_{20} , preferably C_1 - C_{10} alkyl group, more preferably methyl or ethyl, m is an integer from 1 to 12 preferably 2 to 6, each of the m groups $-[CHR^{15}]$ - can be the same or different; the groups R^8 and R^9 are suitably derived from an olefin. Where R^8

35 or R^9 is a hetero-substituted aliphatic group it is preferably an

oxygen-substituted aliphatic group e.g. alkylene oxide which can be suitably derived from an epoxide e.g. ethylene oxide, propylene oxide. Where R^8 or R^9 is an alkylene oxide it is suitably of the formula $-[CHR^{16}CHR^{17}O]_pCHR^{16}CHR^{17}-$ where R^{16} and R^{17} are


- 5 independently hydrogen or a C_1 - C_{25} , preferably C_1 - C_{16} , more preferably C_1 - C_6 alkyl group, for example methyl or ethyl. Preferably R^{16} is hydrogen and R^{17} is hydrogen, methyl or ethyl. p is 1 to 20, preferably from 1 to 4. Where R^{17} is hydrogen, methyl or ethyl, the alkylene oxide will usually be derived from ethylene, 10 propylene or butylene oxides respectively.

Where R^7 and/or R^{10} is a hydrocarbyl group it is preferably an alkyl group having at least 50 carbon atoms. The alkyl group can be a polyolefin group derived from an olefin e.g. ethylene, propylene, 1-butene, isobutene, 1-hexene, 1-octene, and the like.


- 15 Preferably the hydrocarbyl group is derived from polyisobutene.

The groups R^{11} , R^{12} and R^{13} are defined as for R^7 and R^{10} above, when R^7 and R^{10} are hydrocarbyl groups, or can be alkyloxy alkyl.


- 20 Alternatively, R^7 and R^{10} can independently be a group derived from a substituted succinimide i.e.

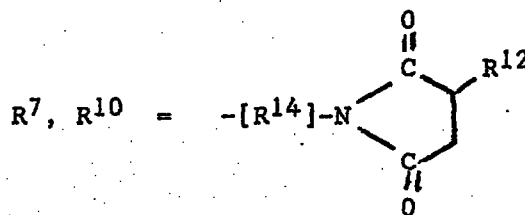


- 25 R^{14} is as defined for the group $-[CHR^{15}]_m$, above; an amide



- 30 or a Mannich condensation product formed by condensing a hydrocarbyl substituted phenol with an aldehyde e.g. from aldehyde and a polyalkylene polyamine

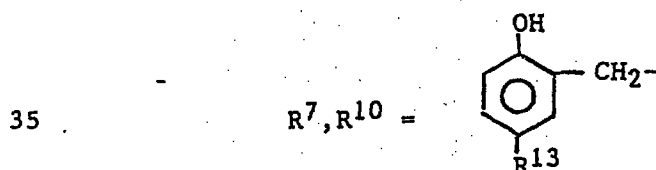

R⁷ and R¹⁰ can be the group Y¹
where Y¹ is



5 where one of R' and R'' is hydrogen, the other is a hydroxyl group.
R⁶ is an aliphatic or hetero-substituted aliphatic group as defined
hereinabove, R⁶ can optionally comprise up to 3 oxirane rings. R⁴
and R⁵ are independently a hydrogen or an aliphatic hydrocarbyl
group; where R⁴ or R⁵ is a hydrocarbyl group it is an alkyl, or
10 alkenyl group preferably an alkyl group. Preferably the hydrocarbyl
group is a C₁-C₆ more preferably C₁-C₃ alkyl group, for example
methyl or ethyl. It is preferred that R⁴ and R⁵ are independently
hydrogen or methyl.

x and y are independently zero or an integer from 1 to 10; it
15 is preferred that x+y is at least 1, preferably 2-6.


q is zero or 1.

Where the product of step (i) is reacted with a low molecular
weight amine as defined hereinabove (compound (A)) before the
subsequent addition of the second portion of the dispersant,
20 reaction of the dispersant and polyepoxide in step(i) is suitably
carried out at a temperature in the range 60-120°C, preferably
80-100°C, for a period of time in the range 15mins to 3hr,
preferably ½-1½ hours. Reaction of the low molecular weight amine
with the product of step(i) is also carried out at a temperature in
25 the range 60-120°C, preferably 80-100°C, for a period of time in the
range 15 mins to 3hr, preferably ½-1½hr.

Where compound (A) is added the number of moles of said
compound (A) is suitably less than the number of moles of dispersant
reacted in step (i) and is preferably in the range 0.1 to 0.95
30 preferably 0.2 to 0.7 per mole of dispersant reacted in step (i).
Where compound (A) is added to the product of step(i), and a second
portion of dispersant is reacted in a third step as described
hereinabove, the second portion of dispersant is suitably reacted at
a temperature in the range 70-250, preferably 100-200°C, more
35 preferably 130-170°C, for a period between 1 and 6hr, preferably 2-4

hrs. The second portion of dispersant in this case is added in such an amount that the ratio of moles of second portion of dispersant/moles of diepoxide added in step(i) is in the range of 0.5-8.0, preferably 1.0-4.0.

5 Products of step (ii) wherein the product of step (i) is reacted with compound A comprise a novel compound of the general formula:



10

wherein Z = $(CR^1R^4\overset{R^{11}}{\underset{|}{CH}}(R^6)\overset{R^{111}}{\underset{|}{CH}}CR^{1111}R^5)_2R^{18}$

where one of R¹ and R¹¹ and one of R¹¹¹ and R¹¹¹¹ is hydrogen and the other is a hydroxyl group,

15 R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, Y¹, x, y and q are all as defined hereinabove, and

R¹⁸ is a divalent radical derived from compound having 2 amino hydrogens by removal of said amino hydrogens.

20 The divalent radical is derived from the removal of 2 amino hydrogens from a compound (A) as defined hereinabove (for example =N(CH₂)₅CH₃ from H₂N(CH₂)₅CH₃).

The two (or more) step reaction is preferably carried out in a solvent for the reactants. Lubricating oils are preferred as solvents because (i) commercially available succinimides are
25 generally marketed in the form of lubricating oil solutions and (ii) the intended use of the product of the reaction is as a lubricating oil additive. Both natural and synthetic lubricating oils may be employed. Suitably the lubricating oil may be a mineral oil, for example an SN150 oil. It is also possible to use an inert diluent
30 if so desired. Suitable inert diluents include liquid hydrocarbons, for example xylene, toluene, or the like.

The product of the reaction carried out in a lubricating oil solvent is a concentrate composition containing the oil soluble dispersant additive.

35 An advantage of producing the dispersant composition in the

manner aforesaid is that there is less possibility of the product being contaminated with residual chlorine, unlike alternative routes in which chlorine is employed as a reactant. In consequence the product is potentially more environmentally acceptable.

5 In another aspect, the present invention provides a lubricating oil composition which composition comprises a major proportion of a lubricating oil and a minor proportion of the dispersant additive of the present invention.

10 The lubricating oil may be any natural or synthetic lubricating oil.

Into the lubricating oil composition there may also be incorporated any of the conventional additives normally employed, which additives include antioxidants, detergents, extreme pressure/anti-wear agents and viscosity index improvers. It is an advantage of the present invention that, because the dispersant composition of the invention has viscosity index properties, less of the conventional viscosity index improver may be required.

The lubricating oil composition may be used for any lubricating application, including automotive and marine use.

20 For automotive use the lubricating oil composition may suitably contain up to 10% (eg 0.1 to 10% or 2 - 10%) by weight of the dispersant additive of the present invention.

For marine engine use the lubricating oil composition may suitably contain up to 10% (eg 0.1 to 10% or 2 - 10%) by weight of the dispersant additive of the present invention.

25 The invention will now be illustrated by reference to the following Examples and Figures.

Figure 1 is a plot of Viscosity of an 11% oil solution of succinimide derivatives described in Comparison Tests 1 and 2 at 100°C as

a function of the molar ratio of diepoxide to succinimide.

Figure 2 is a plot of Viscosity of an 11% oil solution of succinimide derivative described in Example 9 and Comparison Test 2 at -100°C as a function of the molar ratio of BDGE to succinimide.

35 Figure 3 is a plot of VI of an 11% oil solution of succinimide

derivative described in Example 9 and Comparison Test 2 as a function of the molar ratio of BDGE:succinimide.

Examples 1-8 (according to the invention) are examples of where the reaction product of step i) is reacted with Compound (A) as defined hereinabove. Example 9 (according to the invention) is an example where no Compound (A) is added to the product of step (i).

In all the Examples there was used ADX201 (a commercially available succinimide dispersant) formed by the reaction of a polyisobutene (M_n about 1000) - substituted succinic anhydride and tetraethylene pentamine or ADX212 (a commercially available succinimide dispersant) produced by the reaction of a polyisobutene (M_n about 2,000)- substituted succinic anhydride and triethylene tetramine. Where the term "succinimide" is used in the Examples and the figures, it refers to ADX201.

15 Method 1:

Suitably a polyepoxide (0.75 or more, preferably 0.75 to 1.1, more preferably 0.8 to 0.95 equivalents of polyepoxide are used for each reactive N-H group present in the dispersant) is added to a dispersant derivative having at least one reactive nitrogen-containing moiety (that is primary or secondary amino nitrogen), at a temperature in the range from ambient to 120°C. The temperature of the mixture is then adjusted, if necessary, to a value from 60-120°C over a period of, for example 15 mins to 1 hr. The mixture is maintained at this temperature for a period of, for example 15 mins to 2 hr. A low molecular weight amine (preferably MW 31-1000) containing at least two reactive amino nitrogen (N-H) groups is added, at a temperature in the range from 15°C to its boiling point, to the mixture (in the range 0.1-0.95 molar equivalents, suitably 0.2 to 0.7 molar equivalents per mole of the dispersant added in step (i). The temperature is adjusted, if necessary, to between 60°C and 120°C. The mixture is maintained at this temperature for a period of, for example, 15 mins to 3 hr. A further portion of dispersant derivative (not necessarily the same one as above; generally 0.5-8.0 molar equivalents, preferably 1.0-4.0 molar equivalents per mole of diepoxide added in step (i))

containing at least one reactive nitrogen group (N-H) is added to the mixture at a temperature in the range from 15 to 220°C. The temperature of the mixture is adjusted, if necessary, to a value in the range from 70 to 250°C, preferably 100-200°C, and the mixture is
5 maintained at this temperature for a period of, for example, 15 to 300 minutes, preferably 1h to 4hrs.

Example 1:

Four molar equivalents of butanediol diglycidyl ether were added to 200g of a 25% actives solution of ADX201 in SN150 oil at
10 20°C. The mixture was heated to 90°C and stirred at this temperature for 1 hour. N,N-dimethyl- 3-aminopropylamine (0.55 equivalents) were added to this mixture and it was stirred for a further 1 hour period at 90°C. A second portion (276g) of a 50% actives solution of ADX201 in SN150 was added and the mixture was
15 stirred at 150°C for 4 hours.

Example 2:

Four molar equivalents of butanediol diglycidyl ether were added to 100g of a 25% actives solution of ADX201 in SN150 oil at 20°C. The mixture was heated to 90°C and stirred at this
20 temperature for 1 hour. N,N-dimethyl- 3-aminopropylamine (0.50 equivalents) were added to this mixture and it was stirred for a further 1 hour period at 90°C. A second portion (100g) of a 73% actives solution of ADX201 in SN150 was added and the mixture was stirred at 150°C for 4 hours.

25 Method 2:

Suitably a polyepoxide (0.75 or more, preferably 0.75 to 1.1, more preferably 0.8 to 0.95 equivalents of polyepoxide are generally used for each reactive N-H group present in the dispersant) is added to a dispersant having at least one reactive
30 nitrogen containing moiety, that is primary or secondary amino nitrogen, at a temperature in the range from ambient to 120°C. The temperature of the mixture is then adjusted, if necessary, to a value from 60 to 120°C over a period of, for example 15 mins to 1 hr. The mixture is maintained at this temperature for a period
35 of, for example 15 mins to 3 hr. A low molecular weight amine (mw

(preferably MW 31 - 1000), in the range 0.1-0.95 molar equivalents, suitably 0.2 to 0.7 molar equivalents per mole of dispersant added in step (i) containing at least two reactive amino nitrogen (N-H) groups, is blended with a further portion of a dispersant derivative
5 (not necessarily the same as above) containing at least one reactive nitrogen containing moiety. This is then added to the intermediate at a temperature in the range from 15 to 220°C. The temperature of the mixture is adjusted, if necessary, to a value in the range from 70 to 250°C, preferably 100-200°C, and the mixture is maintained at
10 this temperature for a period of, for example, 15 to 300 minutes, preferably 1h to 4hrs.

Example 3:

Four molar equivalents of butanediol diglycidyl ether were added to a 50% solution of ADX201 in SN150 (100g) at 20°C. The
15 temperature was raised to 90°C over 30 minutes and stirred at this temperature for 35 minutes. 246g of a blend of dimethylaminopropylamine (4.4g) in a 50% oil solution of ADX201 (250g) was added and the reaction stirred at 120°C for 1 hour.

Example 4:

20 Four molar equivalents of butanediol diglycidyl ether were added to a 50% solution of ADX201 in SN150 (100g) at 20°C. The temperature was raised to 90°C over 30 minutes and stirred at this temperature for 35 minutes. 243g of a blend of dimethylaminopropylamine (8.9g) in a 50% oil solution of ADX201
25 (250g) was added and the reaction stirred at 120°C for 1 hour.

Example 5:

Four molar equivalents of butanediol diglycidyl ether were added to a 50% solution of ADX201 in SN150 (100g) at 20°C. The temperature was raised to 90°C over 30 minutes and stirred at this
30 temperature for 35 minutes. 242g of a blend of dimethylaminopropylamine (4.3g) in a 50% oil solution ADX212 (250g) was added and the reaction stirred at 120°C for 1 hour.

Example 6:

Four molar equivalents of butanediol diglycidyl ether were
35 added to a 50% solution of ADX201 in SN150 (100g) at 20°C. The

temperature was raised to 90°C over 30 minutes and stirred at this temperature for 35 minutes. 232g of a blend of ethylenediamine (2.5g) in a 50% oil solution of ADX201 (250g) was added and the reaction stirred at 120°C for 1 hour.

5 Example 7:

 Six molar equivalents of butanediol diglycidyl ether were added to a 50% solution of ADX201 in SN150 (100g) at 20°C. The temperature was raised to 90°C over 30 minutes and stirred at this temperature for 35 minutes. 243.6g of a blend of
10 dimethylaminopropylamine (4.5g) in a 50% oil solution of ADX201 (250g) was added and the reaction stirred at 120°C for 1 hour.

Example 8:

 Six molar equivalents of butanediol diglycidyl ether were added to a 50% solution of ADX201 in SN150 (100g) at 20°C. The temperature was raised to 90°C over 30 minutes and stirred at this
15 temperature for 30 minutes. 237g of a blend of ethylenediamine (2.5g) in a 50% oil solution of ADX201 (250g) was added and the reaction stirred at 120°C for 1 hour.

 The viscosities at -20, 40 and 100°C for each of the products from Examples 1-8, the starting dispersants and a commercially
20 available dispersant LZ6420 are given in Table 1.

25

30

35


Table 1

5	Dispersant		Viscosity			VI	
			-20°C	40°C	100°C		
	Actual	Actives	Poise	c/s	c/s		
	Conc(%)	Conc(%)					
10	Lz6420	-	5.5	38.00	53.2	8.38	131
	ADX201	-	5.5	33.75	43.2	6.76	108
		-	7.3	47.00	50.7	7.38	106
	ADX212	-	6.0	38.0	48.6	7.41	115
15	Example 1	13.0	5.7	26.6	50.35	8.34	139
	Example 2	10.0	5.3	32.5	49.91	8.11	134
		13.0	6.9	42.5	58.25	9.26	141
	Example 3	13.0	7.2	32.8	52.0	8.52	139
20	Example 4	13.0	7.3	37.7	51.3	8.47	141
	Example 5	13.0	7.2	29.6	50.8	8.23	134
	Example 6	13.0	7.2	24.5	52.8	8.62	139
	Example 7	13.0	7.4	37.3	75.8	12.47	164
	Example 8	13.0	7.4	28.2	71.6	11.93	163

* 'Actives conc.' refers to any material that is not mineral oil, ie the amount of succinimide + diepoxide present by weight.

25 ** 'Actual conc.' refers to % weight of end material (which contains oil already) diluted in oil.

In Comparison Test 1 there is used Epikote (RTM) 828. This has the formula:



LZ6420 is a dispersant having VI credit marketed by Lubrizol. It is used hereinafter for comparison purposes.

Comparison Test 1

Preparation of a dispersant additive by reacting a succinimide with an aromatic diepoxide in one step.

A 50% by weight solution of the succinimide in Solvent Neutral (SN)150 oil was heated to 125°C. A diepoxide (Epikote (RTM) 828) was added to the succinimide solution over 15 minutes and the resulting mixture was heated to 130°C and maintained at this temperature for 90 minutes.

The reaction was performed over a range of molar ratios of diepoxide to succinimide. The viscosities of 11.0% by weight of product solutions at -20, 40 and 100°C were recorded. A graph of the viscosity at 100°C as a function of the molar ratio of diepoxide to succinimide is provided in Figure 1. The graph shows that the viscosity of the solution increases markedly at a molar ratio of diepoxide : succinimide in the range from about 0.7 to about 0.8, the maximum viscosity being observed at a molar ratio of about 0.8.

Molar ratios in excess of 0.8 generated gels which were insoluble in oil.

A comparison between the viscosities of one of the products(0.79 molar ratio) with the untreated succinimide starting material is shown in Table 2.

Table 2

Temperature (°C)	Viscosity of 11.0% solution of starting succinimide	Viscosity of 11.0% solution of 0.79 molar ratio derivative
-20	35.75 poise	37.0 poise
40	43.2 cSt	50.97 cSt
100	6.76 cSt	8.24 cSt

The figures in Table 2 show that whilst the -20°C viscosity was relatively unaffected (3.5% increase), relatively the 100°C viscosity was substantially (21.9%) increased.

Comparison Test 2

Preparation of a dispersant additive by reacting a succinimide with an aliphatic diepoxide in one step.

A 50% solution of the succinimide in SN 150 oil was heated to 125°C. 1,4-Butanediol diglycidyl ether (BDGE) was added dropwise
5 over a period of 40 minutes. The temperature of the reaction mixture was maintained at 125°C for a further 60 minutes. The viscosity of a 11.0% solution of the succinimide product in SN 150 oil was recorded at 100°C.

The reaction was performed over a range of molar ratios of
10 diepoxide to succinimide. The viscosities of the products were recorded on 11.0% solutions at 40 and 100°C.

A comparison between the viscosities of the products at 100°C as a function of the molar ratio of diepoxide to succinimide is shown in Figure 1 and in Figure 2.

15 Example 9

Preparation of a dispersant by reacting a succinimide with an aliphatic diepoxide in two sequential steps.

The succinimide was combined with four equivalents of 1,4-butanediol diglycidyl ether (BDGE) at ambient temperature. The
20 mixture was heated to 90°C over 30 minutes and maintained at this temperature for a further 30 minutes. A further portion of the succinimide at a temperature of 75°C was then added. The temperature of the mixture was raised to 120°C and held at this value for one hour. This reaction was carried out for a range of
25 molar ratios of diepoxide.

A summary of the results from the one step (Comparison Test 2) and two-step (Example 9) reactions of succinimide with 1,4-butanediol diglycidyl ether is shown in Table 3. The differences between the viscosities of the products at 100°C as
30 11.0% solutions is highlighted in Figure 2. Figure 3 contrasts the effect on the viscosity index of the product of increasing the ratio of the aliphatic diepoxide to the succinimide from Comparison Test 2 and Example 9.

TABLE 3

		** Concn. of product (% b.w.)	Concn. of actives* present (% b.w.)	VISCOSITY			VI
				-20°C Poise	40°C c/s	100°C c/s	
5	LZ6420	11.0	5.5	38.00	53.2	8.38	131
	Succinimide	11.0	5.5	35.75	43.2	6.76	108
10	COMPARISON TEST 2 ONE STEP SUCCINIMIDE: BDGE						
	1 : 0.75	11.0	5.8	-	41.7	6.80	119
15	1 : 0.85	11.0	5.9	-	43.5	6.93	116
	1 : 1.50	11.0	6.1	-	43.5	7.04	119
	1 : 1.75	11.0	6.2	-	42.9	6.90	118
20	EXAMPLE 9 STEPWISE SUCCINIMIDE: BDGE: SUCCINIMIDE						
	1 : 4 : 7	11.0	5.7	33.9	41.6	6.78	120
25	1 : 4 : 3	11.0	5.9	33.5	47.2	7.74	130
		13.0	7.0	38.0	52.2	8.45	135
	1 : 4 : 2	11.0	6.1	34.7	48.9	8.00	134
		12.0	6.6	37.0	57.4	9.40	146
30	1 : 4 : 1	11.0	6.3	36.5	67.3	12.12	179

* 'Actives' refers to any material that is not mineral oil, ie the amount of succinimide + diepoxide present by weight.

-** 'Concn. of product' refers to % weight of end material (which contains oil already) diluted in oil.

35 With reference to Figure 3 it can be seen that by comparison

with the two-step reaction little VI credit is obtained by the corresponding one-step reaction.

Thin Layer Chromatography (TLC) Dispersancy Test

5 This bench Test measures how far a dispersant can move a used oil.

The dispersants tested were (i) the succinimide reacted with Epikote (RTM) 828 (an aromatic diepoxide) in a molar ratio of 1:0.82 in a single step reaction (Comparison Test 1) and (ii) the succinimide reacted with BDGE (an aliphatic diepoxide) followed by 10 further succinimide in a molar ratio of 1:4:3 in a two-step reaction (from Example 9). The succinimide itself was tested, as was also LZ6420.

The results of the Test are given in Table 4.

TABLE 4

15			
	Material tested	% used oil moved	% used oil - total streak length (cm)
	(i) Succinimide:Epikote 828 (1:0.82)	36.6	100.0
20	(ii) Succinimide:BDGE : Succinimide (1:4:3)	83.4	91.8
	(iii) Succinimide	92.5	92.2
	(iv) LZ6420	79.0	91.2
25	PASS RATING	greater than 70.0	greater than 85.0


According to the results reported in Table 4, the Test predicts the aromatic (one-step) product (i) to be a poor dispersant and in contrast the aliphatic (two-step) product (ii) to be a good one.

30 The aromatic (one-step) product (i) was rated in a Petter AVB engine test. It received an overall rating of 15, which is a bad fail (base oil rating = 30, pass rating is greater than 60).

35

Claims:


1. A process for the production of a lubricating oil soluble compound suitable for use as a dispersant additive by a process which comprises reacting at elevated temperature a polyepoxide with a dispersant having at least one reactive nitrogen-containing moiety characterised in that the polyepoxide is an aliphatic polyepoxide and that the polyepoxide is reacted with the dispersant in at least two sequential steps, wherein in a first step a first portion of dispersant is reacted with the polyepoxide, at least 0.75 equivalents of polyepoxide being used for each reactive N-H group present in the dispersant, and in a subsequent step or steps at least one further portion of dispersant is reacted with the product of the preceding step, there being added from 0.5 to 15 equivalents of dispersant per equivalent of dispersant used in the first step.
2. A process as claimed in claim 1 wherein the dispersant is an imide or amide formed by the reaction of a polyalkene substituted succinic acylating agent and an amine.
3. A process as claimed in claim 2 wherein the imide is a succinimide of formula I:

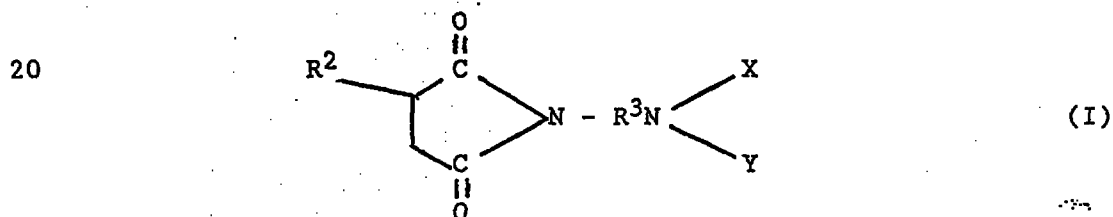

wherein R^2 is a polyalkene group having more than 30 carbon atoms and R^3 is a divalent group such that H_2NR^3NXY is an alkylene amine,

25

an alkanolamine, a polyetheramine, an aromatic or an araliphatic amine, X and Y are independently a hydrogen, an alkyl or a hydroxyalkyl group or together form the group

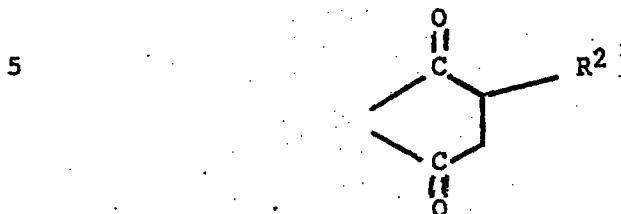

4. A process as claimed in claim 3 wherein R² is a polyisobutene group.


5. A process as claimed in either claim 3 or claim 4 wherein the group R³ is a divalent group of the formula:



where k is an integer from 2 to 6.

6. A process as claimed in any one of claims 1 to 5 wherein the dispersant contains between 3 and 7 active nitrogens.

7. A process as claimed in any one of claims 1 to 6 wherein the polyepoxide has the formula



where q is zero or 1,

R⁶ is a divalent aliphatic hydrocarbyl or hetero-substituted aliphatic hydrocarbyl group,

R⁴ and R⁵ are independently hydrogen or an aliphatic hydrocarbyl group.

8. A process as claimed in claim 7 wherein q=1 and R⁶ is an alkylene group of formula $-\text{[CHR}_b\text{]}_r-$ where r = 1-6, and R_b is hydrogen, methyl or ethyl, and each of the $-\text{[CHR}_b\text{]}-$ groups is the same or different.


9. A process as claimed in claim 7 wherein R⁶ is a hetero-substituted aliphatic hydrocarbyl group and the polyepoxide is prepared by reaction of a diol or glycol with epichlorohydrin or by reaction of the corresponding dichloride with glycidol.

10. A process as claimed in claim 9 wherein the polyepoxide is one of 1,4-butane diol diglycidyl ether; 1,6-hexane diol diglycidyl

ether; polypropylene oxide diglycidyl ether; and 2,2-dimethyl 1,3-propane diol diglycidyl ether.

11. A process as claimed in claim 7 wherein R⁶ is an alkylene or alkylene glycol group substituted with the group

5



where j is zero or 1, Ra is an alkylene or alkylene glycol group, and R⁴ is as defined in claim 7.

12. A process as claimed in any one of claims 7 to 11 wherein R⁴ and R⁵ are independently hydrogen or methyl.

13. A process as claimed in any one of the preceding claims wherein in the first step said polyepoxide is used in an amount in the range 0.85 to 1.1 equivalents of polyepoxide to amino hydrogens present in the dispersant.


14. A process as claimed in any one of the preceding claims wherein a first portion of dispersant is reacted with the polyepoxide in a first step and in a second step the product of the first step is reacted with a compound (A) having a molecular weight lower than said dispersant and having at least 2 amino hydrogens, a second portion of dispersant being added at the same time as or subsequent to reaction of compound (A) with the product of the first step.

15. A process as claimed in claim 14 wherein said second portion of dispersant is added subsequent to the reaction of compound (A) with the product of the first step.

16. A process as claimed in either claim 14 or claim 15 wherein compound (A) is a polyamine, an amine terminated polyalkylene glycol, an alcoholamine or a polyoxy alkylene amine.

17. A process according to claim 14 wherein the product of the first step is of the formula IV:


30



where R⁸ and R⁹ are independently a divalent aliphatic, hetero-substituted aliphatic, aromatic or hetero-substituted aromatic group,

35

R⁷ and R¹⁰ are independently a hydrocarbyl group which is an alkyl group having at least 50 carbon atoms, or

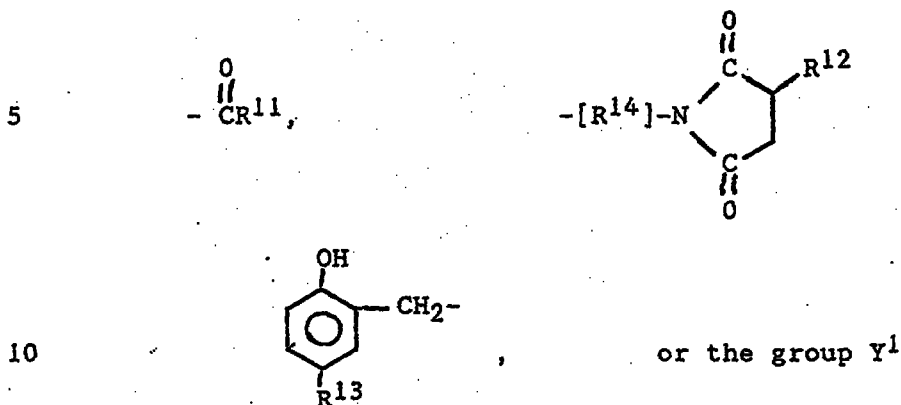

wherein Y¹ is $\begin{array}{c} \text{R}' \\ | \\ \text{CR}^4-\text{CH}(\text{R}^6)_q-\text{CH}-\text{CHR}^5 \\ | \qquad \qquad \qquad | \\ \text{O} \qquad \qquad \qquad \text{O} \end{array}$

15 where one of R' and R'' is hydrogen and the other is a hydroxyl group,

R¹¹, R¹² and R¹³ are independently a monovalent aliphatic or hetero-substituted aliphatic group,


R¹⁴ is a divalent aliphatic or hetero-substituted aliphatic group,

20 x and y are independently zero or an integer from 1 to 10,

each group R⁸, each group R⁹, and each group Y¹ is the same or different,

R⁴, R⁵, R⁶ and q are as defined in claim 7.

18. A process according to claim 14 wherein the product of the
25 second step is of the formula



30 wherein Z = $\begin{array}{c} \text{R}'' \qquad \text{R}''' \\ | \qquad \qquad | \\ (\text{CR}^4-\text{CH}(\text{R}^6)_q-\text{CH}-\text{CHR}^5)_2 \text{R}^{18} \end{array}$

where one of R' and R'' and one of R''' and R'''' is hydrogen and the other is a hydroxyl group,

R¹⁸ is a divalent radical derived from a compound having 2 amino hydrogens by removal of said amino hydrogens,

35 R⁴, R⁵, R⁶ and q are as defined in claim 7, R⁷, R⁸, R⁹, R¹⁰, Y¹, x

and y are as defined in claim 17.

5

10

15

20

25

30

35

FIG. 1

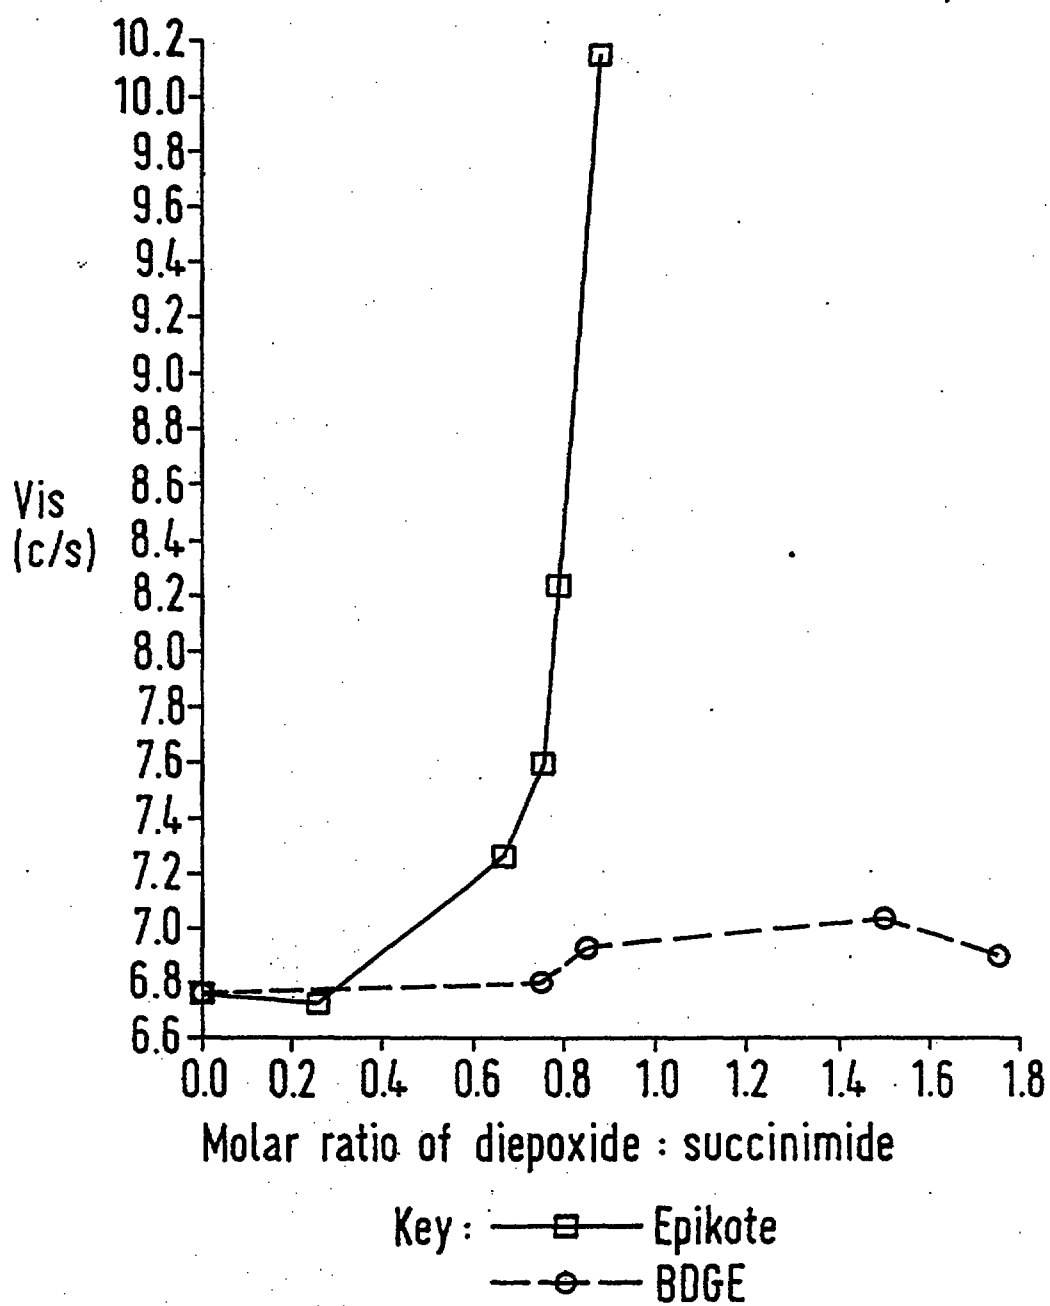


FIG. 2

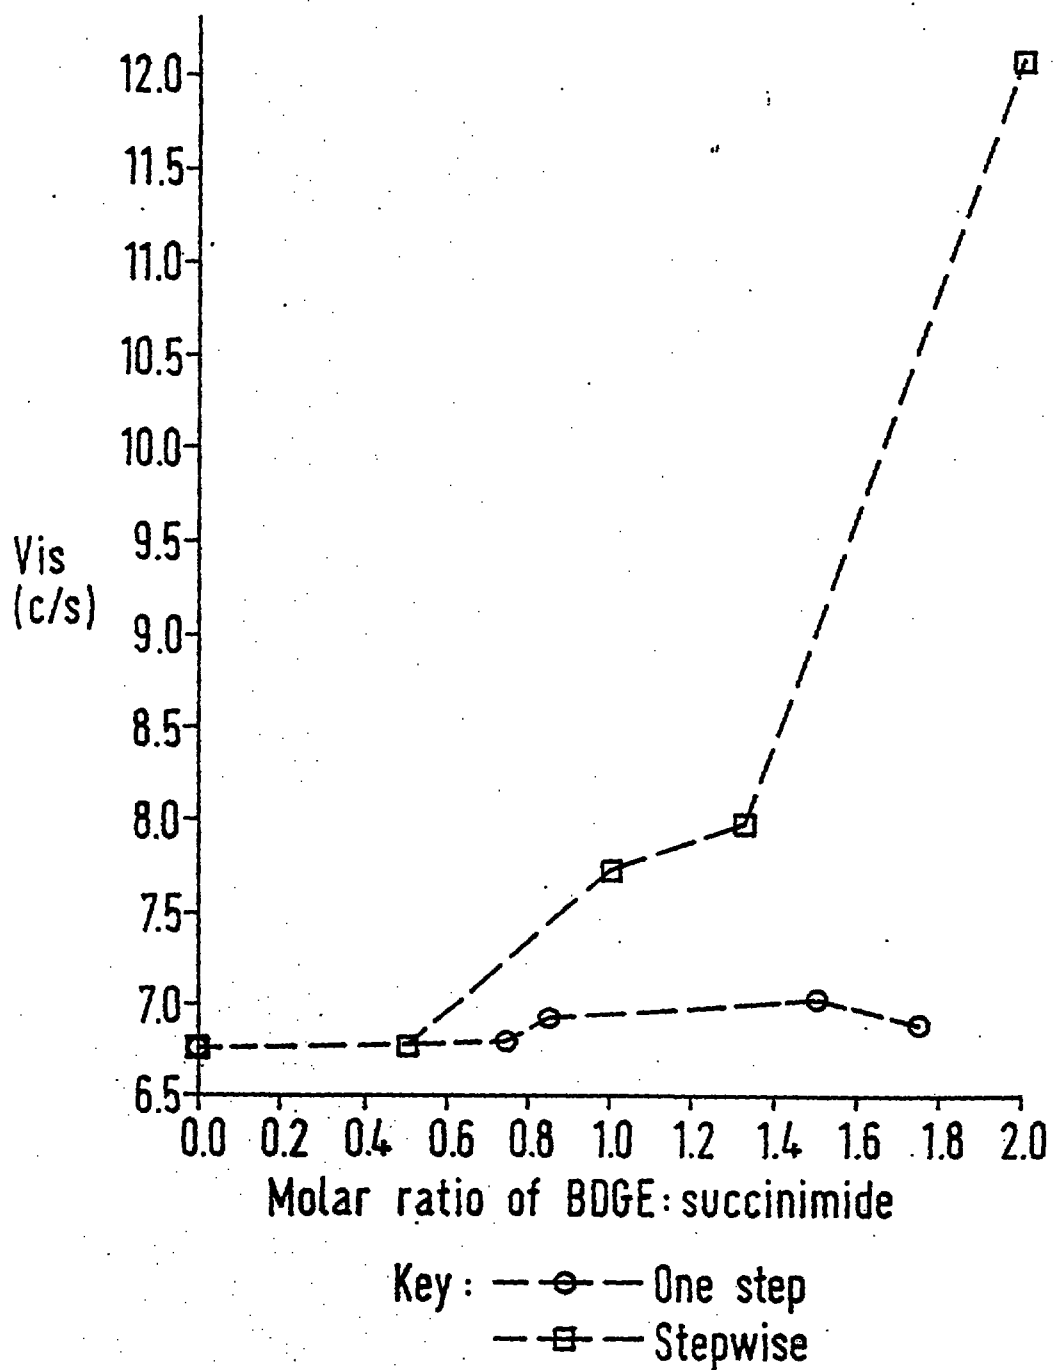


FIG.3

