

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2005 (29.12.2005)

PCT

(10) International Publication Number
WO 2005/123887 A1

(51) International Patent Classification⁷: **C10M 149/10**,
167/00, 169/04

(21) International Application Number:
PCT/EP2005/052789

(22) International Filing Date: 16 June 2005 (16.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04253657.3 18 June 2004 (18.06.2004) EP

(71) Applicant (for all designated States except US): **SHELL
INTERNATIONALE RESEARCH MAATSCHAPPIJ
B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR
The Hague (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **COLBOURNE,
David** [GB/GB]; Pool Lane, Ince, Chester, Cheshire CH2
4NU (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: LUBRICATING OIL COMPOSITION

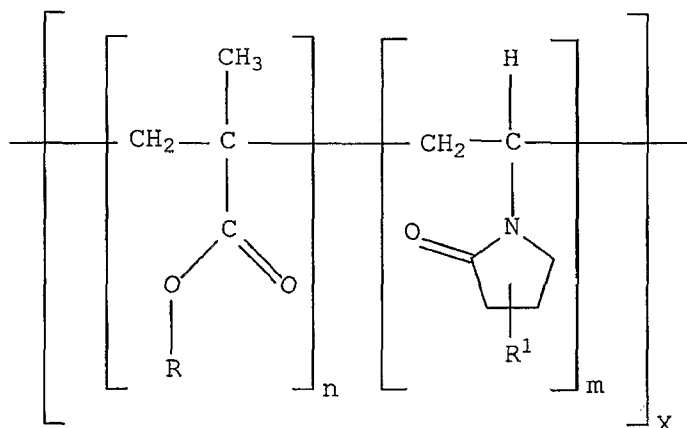

(57) Abstract: Lubricating oil composition having a sulphur content of from 0.01 to 0.3 wt.%, a phosphorus content of from 0.01 to 0.1 wt.% and a sulphated ash content of from 0.1 to 1.2 wt.%, based on the total weight of the lubricating oil composition, which comprises a mineral and/or synthetic base oil and one or more compounds of formula (I), wherein R is an optionally substituted branched or straight chain alkyl group containing from 3 to 50 carbon atoms; R¹ is hydrogen or an optionally substituted branched or straight chain alkyl group containing from 1 to 50 carbon atoms; n is an integer equal to or greater than 1, and m is also an integer equal to or greater than 1; and X is an integer from 2 to 10,000; and a method of

improving engine cleanliness in diesel, gas-fuelled or gasoline engine applications using said composition.

WO 2005/123887 A1