

(51) International Patent Classification:
G06F 13/00 (2006.01)(21) International Application Number:
PCT/US2011/031290(22) International Filing Date:
5 April 2011 (05.04.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/824,029 25 June 2010 (25.06.2010) US(71) Applicant (for all designated States except US): **WYSE TECHNOLOGY INC.** [US/US]; 3471 N. First Street, San Jose, CA 95134 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LAM, Mandy, Sui Mei** [US/US]; 41634 Covington Drive, Fremont, CA 94539 (US).(74) Agent: **LAUB, Soyeon (karen), Pak**; McDermott Will & Emery LLP, 18191 Von Karman, Suite 500, Irvine, CA 92612 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: APPARATUS AND METHOD FOR NETWORK DRIVER INJECTION INTO TARGET IMAGE

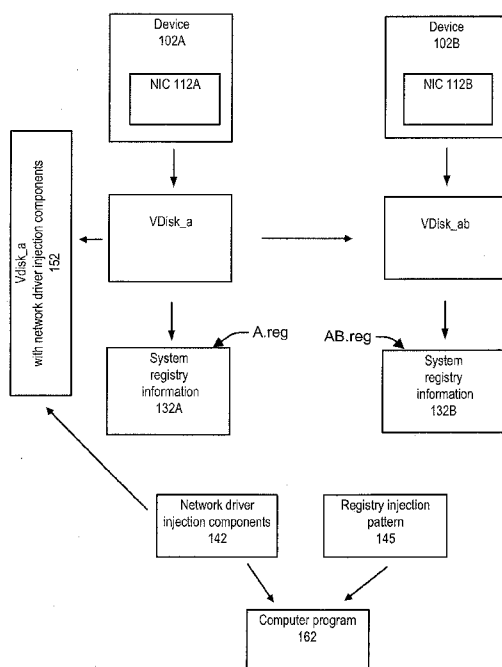


FIG. 1B

(57) Abstract: A method provides network driver injection into a target image to transform the target image to be compatible with one or more source machines, for facilitating operating system streaming over a network. The method may include: facilitating access to a source system registry file of a source machine; facilitating access to a target system registry file of the target image, without copying the target image; determining whether source network interface cards of the source machine are compatible with the target image; and if the source network interface cards are not compatible with the target image, performing network interface driver injection into the target image. The target image may include an operating system. A machine-readable storage medium and apparatus are provided. A method is described for building a program for providing network driver injection into a target image to transform the target image to be compatible with computing machines.