

(51) International Patent Classification:
B41J 15/04 (2006.01) *B41J 3/407* (2006.01)(21) International Application Number:
PCT/JP2010/002169(22) International Filing Date:
26 March 2010 (26.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2009-086172 31 March 2009 (31.03.2009) JP
2009-086184 31 March 2009 (31.03.2009) JP
2009-086201 31 March 2009 (31.03.2009) JP
2009-086222 31 March 2009 (31.03.2009) JP(71) Applicant (for all designated States except US):
BROTHER KOGYO KABUSHIKI KAISHA [JP/JP];
15-1, Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi,
4678561 (JP).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **YAMAGUCHI, Koshiro** [JP/JP]; c/o BROTHER KOGYO KABUSHIKI KAISHA, 15-1, Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi, 4678561 (JP). **SAGO, Akira** [JP/JP]; c/o BROTHER KOGYO KABUSHIKI KAISHA, 15-1, Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi, 4678561 (JP).(74) Agents: **YAMAMOTO, Hisashi** et al.; 6th-floor, Kami-maezu KD-bldg., 10-32, Osu 4-chome, Naka-ku, Nagoya-shi, Aichi, 4600011 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: TAPE CASSETTE AND TAPE PRINTER

[Fig. 6]

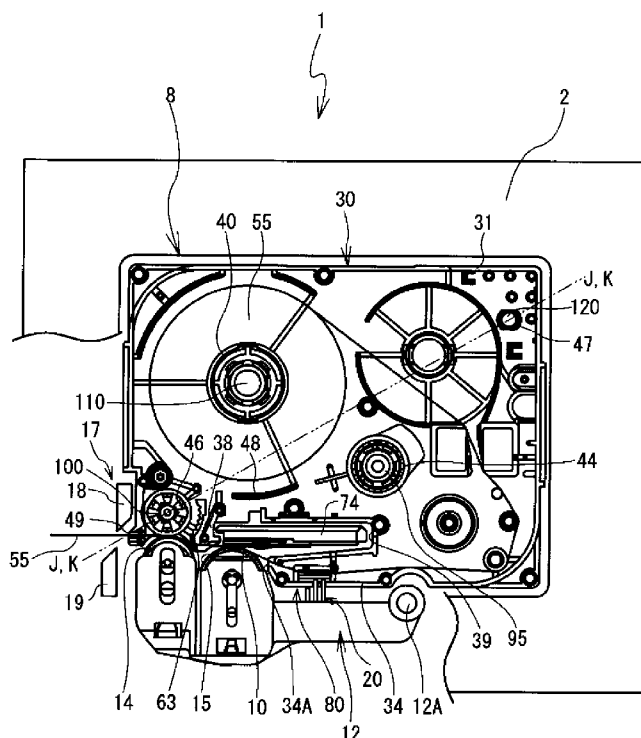

(57) Abstract: A cassette case 31 of a tape cassette 30 has a roller support hole and a guide hole 47 provided at diagonal positions in a plan view. A first tape spool 40 wound with a heat-sensitive paper tape 55 is disposed within the cassette case 31 in a first area of the cassette case 31 at the rear side of a division line K. The cassette case 31 has a first tape support hole that faces a shaft hole of the first tape spool 40. When the tape cassette 30 is installed in or removed from a cassette housing portion 8 of a tape printer 1, three shafts provided in the cassette housing portion 8 are respectively inserted in the roller support hole, the guide hole 47, and the first tape support hole. The tape cassette 30 is stably guided along the three shafts in an installation/removal direction.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*