



(51) International Patent Classification:

F21V 14/00 (2006.01) *F21S 8/00* (2006.01)
F21V 19/00 (2006.01) *F21V 21/00* (2006.01)
F21W 111/02 (2006.01) *F21W 111/08* (2006.01)

(21) International Application Number:

PCT/AU2011/000263

(22) International Filing Date:

9 March 2011 (09.03.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010902861 29 June 2010 (29.06.2010) AU

(71) Applicant (for all designated States except US): **KLIK SYSTEMS AUSTRALIA PTY LTD** [AU/AU]; Unit 2, 2 Southridge Street, Eastern Creek, NSW 2766 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ROOS, Paul, Jan** [AU/AU]; 76 Farrell Road, Bulli, NSW 2516 (AU).

(74) Agent: **MOLINS, Michael**; Suite 5, Level 6, 139 Macquarie Street, Sydney, New South Wales 2000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LIGHTING ASSEMBLY AND METHOD

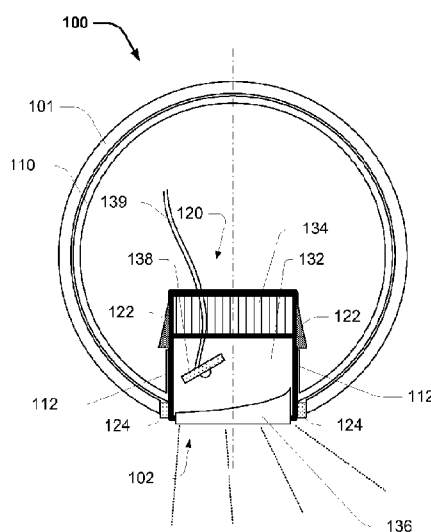


FIG. 1

(57) Abstract: A lighting assembly for installing through a fitting aperture defined by a handrail. The lighting assembly including: a retaining element that is removably insertable through the fitting aperture; a body device for providing a light source, the body device comprising a coupling element releasably engageable to the retaining element; and wherein, with the retaining element inserted through the fitting aperture and located within the handrail, insertion of the body device through the fitting aperture enables the coupling element to engage the retaining element thereby releasably retaining the body device.