PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B67D 1/04, 5/54, B65D 83/14

A1

(11) International Publication Number: WO 99/47451

(43) International Publication Date: 23 September 1999 (23.09.99)

(21) International Application Number: PCT/NL99/00144

(22) International Filing Date: 16 March 1999 (16.03.99)

(30) Priority Data:
1008601 16 March 1998 (16.03.98) NL

(71) Applicant *(for all designated States except US)*: HEINEKEN TECHNICAL SERVICES B.V. [NL/NL]; 2e Weteringplantsoen 21, NL-1017 ZD Amsterdam (NL).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: VLOOSWIJK, Johannes, Jacobus, Thomas [NL/NL]; Meidoornlaan 24, NL-3461 ET Linschoten (NL).

(74) Agent: OTTEVANGERS, S., U.; Vereenigde Octrooibureaux, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: DEVICE FOR DISPENSING A LIQUID UNDER PRESSURE

(57) Abstract
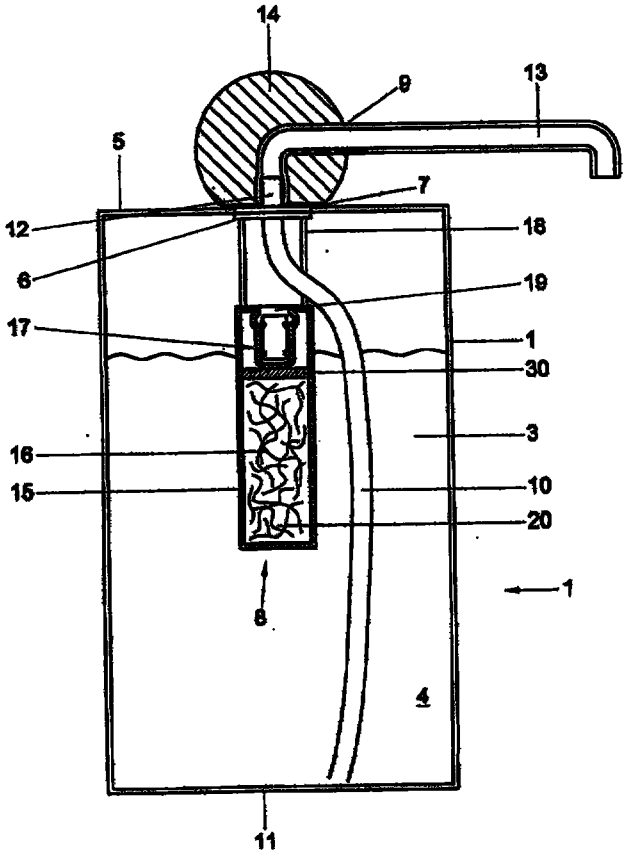
A device for dispensing a fluid, comprising a container having a first compartment, and a second compartment. The first compartment is arranged for receiving the fluid to be dispensed, and the second compartment is arranged for receiving a propellant, while, at least during use, an opening is provided between the first and the second compartment. Pressure control means are arranged for controlling during use the pressure of propellant flowing from the second compartment into the first compartment. In the second compartment, fillers are provided for absorbing and/or adsorbing at least a part of the propellant.