Fig. 6

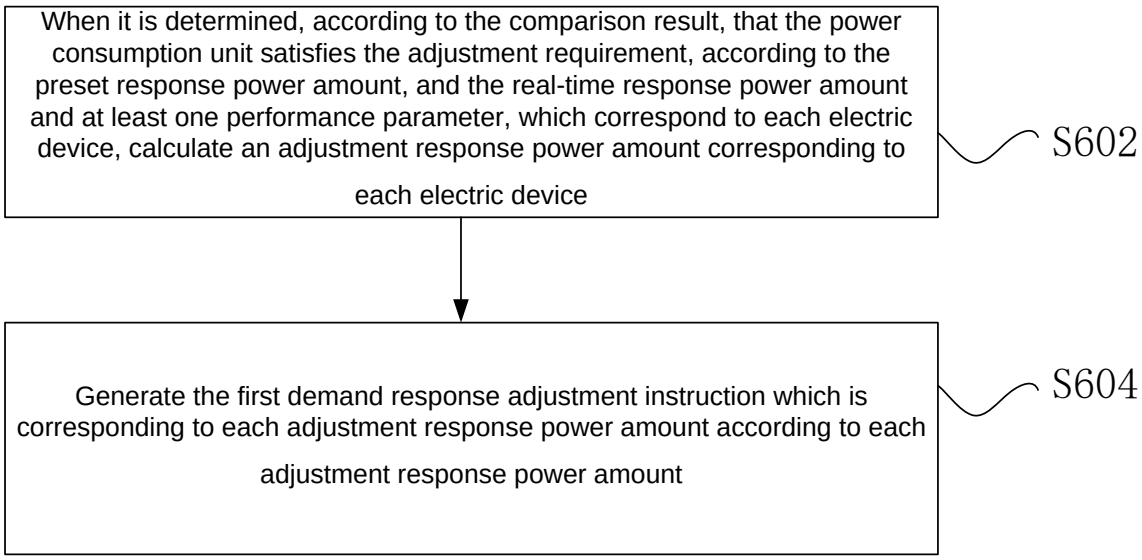
When it is determined, according to the comparison result, that the power consumption unit satisfies the adjustment requirement, according to the preset response power amount, and the real-time response power amount and at least one performance parameter, which correspond to each electric device, calculate an adjustment response power amount corresponding to each electric device
S602
Generate the first demand response adjustment instruction which is corresponding to each adjustment response power amount according to each adjustment response power amount
S604