



(43) International Publication Date
23 August 2012 (23.08.2012)

(51) International Patent Classification:
H04M 1/03 (2006.01)

(21) International Application Number:
PCT/US2012/025584

(22) International Filing Date:
17 February 2012 (17.02.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/444,260 18 February 2011 (18.02.2011) US

(71) Applicant (for all designated States except US): **PEM Management, Inc.** [US/US]; 103 Foulk Road, Suite 108, Wilmington, Delaware 19803 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BENTRIM, Brian** [US/US]; 3830 Forest Hill Drive, Furlong, Pennsylvania 18925 (US).

(74) Agent: **GORE, Gregory J.**; 70 West Oakland Avenue, Suite 316, Doylestown, Pennsylvania 18901 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WINDOW GLASS MOUNTED FASTENER

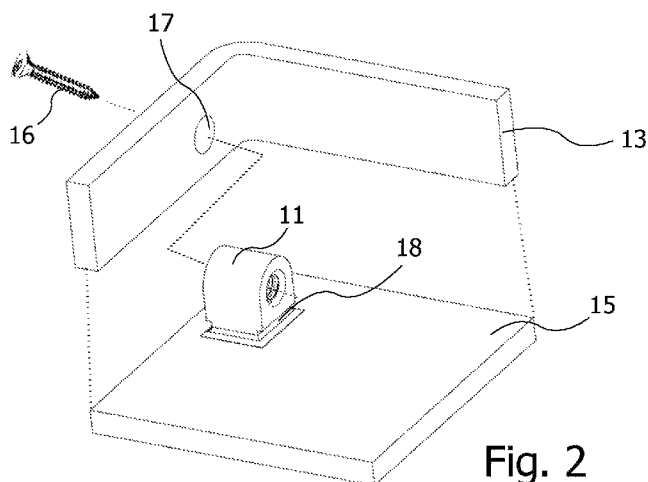


Fig. 2

(57) Abstract: A soldered fastening device mounts a glass plate to a support structure, for example, a window glass mounted to the housing of an electronic device such as a cell phone. The fastening device affixed to a rear surface of the window by solder threadably engages a housing fastener to rigidly secure the window to the housing. The soldering process is preferably wave soldering and the fastening device can have an internally threaded axial bore which is either perpendicular to or parallel to the surface of the window for receiving the fastener, such as a screw.

