

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
28 April 2022 (28.04.2022)



(10) International Publication Number
WO 2022/084902 A1

- (51) International Patent Classification:
B60N 2/28 (2006.01) *B60N 2/02* (2006.01)
- (21) International Application Number:
PCT/IB2021/059704
- (22) International Filing Date:
21 October 2021 (21.10.2021)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
202011135896.6 22 October 2020 (22.10.2020) CN
- (71) Applicant: **BAMBINO PREZIOSO SWITZERLAND**
AG [CH/CH]; Beim Bahnhof 5, 6312 Steinhausen (CH).
- (72) Inventor: **ZHANG, Daliang**; Beim Bahnhof 5, 6312 Steinhausen (CH).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: SHOULDER STRAP WIDTH ADJUSTMENT MECHANISM AND CHILD SAFETY SEAT

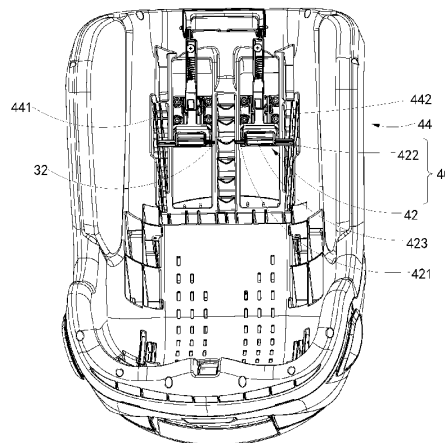


FIG. 6

(57) Abstract: The disclosure provides a shoulder strap width adjustment mechanism (40) comprising: a rail device (44), arranged on a seat backrest (22), including a first rail (441) and a second rail (442) arranged on both sides of the seat backrest (22) and extending substantially in a longitudinal direction; and a lateral distance between the first rail (441) and the second rail (442) gradually changes in the longitudinal direction; and two shoulder strap fixing members (42), connected to a seat headrest (30) and positioned between the seat headrest (30) and the seat backrest (22), and being slidable respectively along the first rail (441) and the second rail (442) of the rail device (44). In the disclosure, the shoulder strap width can be adjusted synchronously during the process of adjusting the height of the headrest, so as to meet the requirements of children of different heights and different body types.

[Continued on next page]

WO 2022/084902 A1

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*