




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/28, H04N 5/445		A1	(11) International Publication Number: WO 98/34378
			(43) International Publication Date: 6 August 1998 (06.08.98)
(21) International Application Number: PCT/US98/01820		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GR, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 30 January 1998 (30.01.98)			
(30) Priority Data: 08/792,361 31 January 1997 (31.01.97) US			
(71) Applicant (for all designated States except US): SHARE-WAVE, INC. [US/US]; 5175 Hillside Circle, El Dorado Hills, CA 95762 (US).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): GHOBEL, Amar [US/US]; 3229 Kensington Drive, El Dorado Hills, CA 95762 (US). WHITE, John [US/US]; 3299 Cessna Drive, Cameron Park, CA 95682 (US).			
(74) Agent: LIU, Wen; Morrison & Foerster LLP, 755 Page Mill Road, Palo Alto, CA 94304-1018 (US).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: A METHOD AND APPARATUS FOR INCORPORATING AN APPLIANCE UNIT INTO A COMPUTER SYSTEM

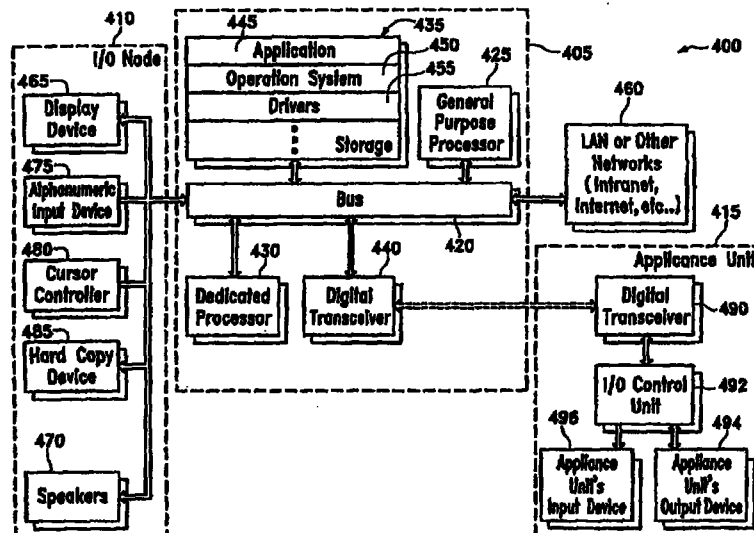

(57) Abstract

The invention provides a method and apparatus for incorporating an appliance into a computer system. One embodiment of the invention has a computer with a first digital wireless transceiver, and an appliance unit with a second digital wireless transceiver for communicatively coupling to the first wireless transceiver. This appliance unit also has (1) an output device, communicatively coupled to the second wireless transceiver, for presenting an output presentation based on signals received from the computer via the wireless transceivers, and (2) an input device, communicatively coupled to the second wireless transceiver, for receiving input signals from an operator of the appliance unit.