(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
31 October 2002 (31.10.2002)

PCT

(10) International Publication Number
WO 02/086282 A1

(51) International Patent Classification[7]: E21B 34/10, 29/08

(21) International Application Number: PCT/US02/05490

(22) International Filing Date: 25 February 2002 (25.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/838,604 19 April 2001 (19.04.2001) US

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 2601 Beltline Road, Carrollton, TX 75006-5401 (US).


(72) Inventors: **DENNISTOUN, Stuart, M.**; 1610 Mission Ridge Trail, Carrolton, TX 75007 (US). **SMITH, Roddie, Robert**; 13627 Waverly Crest Ct., Cypress, TX 77429 (US). **GAZDA, Imre, I.**; 1901 Keller-Hicks Road, Fort Worth, TX 76177 (US).

(74) Agent: **YOUST, Lawrence, R.**; Smith, Danamraj & Youst, P.C., 12900 Preston Road, Suite 1200, LB-15, Dallas, TX 75230-1328 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: WIRELINE RETRIEVABLE SAFETY VALVE WITH RADIAL CUTTING DEVICE

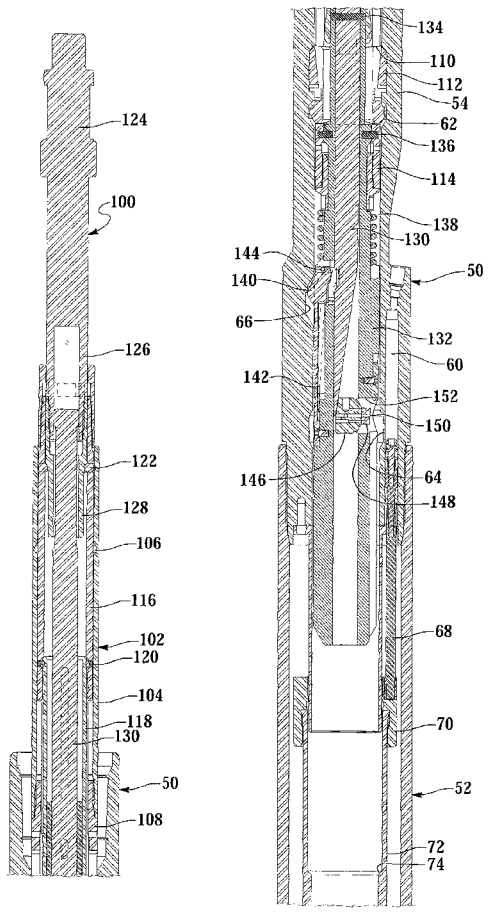

(57) Abstract: A communication tool (100) for communicating hydraulic fluid through a tubing retrievable safety valve (50) is disclosed. The tool (100) has a first section (102) and a second section (132) that are initially coupled together. A set of axial locating keys (112) is operably attached to the first section (102) and is engagably positionable within a profile (62). A radial cutting device (148) is radially extendable through a window (152) of the second section (132). A circumferential locating key (140) is operably attached to the second section (132) and is engagably positionable within a pocket (66) of the safety valve (50) when the first and second sections (102, 132) are decoupled, thereby circumferentially aligning the radial cutting device (148) with the non annular hydraulic chamber (60).

WO 02/086282 A1

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.