

CARBINOL-TERMINATED POLYMERS CONTAINING AMINE

The invention relates to diene polymers with functionalizations at the start of the polymer chains and at the end of the polymer chains, and to the preparation and use thereof.

- 5 Important properties desirable in tyre treads include good adhesion on dry and wet surfaces, and high abrasion resistance. It is very difficult to improve the skid resistance of a tyre without simultaneously worsening the rolling resistance and abrasion resistance. A low rolling resistance is important for low fuel consumption, and high abrasion resistance is a crucial factor for a long lifetime of the tyre.
- 10 Wet skid resistance and rolling resistance of a tyre tread depend largely on the dynamic/mechanical properties of the rubbers which are used in the blend production. To lower the rolling resistance, rubbers with a high resilience at higher temperatures (60°C to 100°C) are used for the tyre tread. On the other hand, for lowering of the wet skid resistance, rubbers having a high damping factor at low temperatures (0 to 23°C) or low resilience in the range of 0°C to 23°C are advantageous. In
- 15 order to fulfil this complex profile of requirements, mixtures of various rubbers are used in the tread. Usually, mixtures of one or more rubbers having a relatively high glass transition temperature, such as styrene-butadiene rubber, and one or more rubbers having a relatively low glass transition temperature, such as polybutadiene having a high 1,4-cis content or a styrene-butadiene rubber having a low styrene and low vinyl content or a polybutadiene prepared in
- 20 solution and having a moderate 1,4-cis and low vinyl content, are used.
- Anionically polymerized solution rubbers containing double bonds, such as solution polybutadiene and solution styrene-butadiene rubbers, have advantages over corresponding emulsion rubbers in terms of production of tyre treads with low rolling resistance. The advantages lie, inter alia, in the controllability of the vinyl content and of the associated glass transition temperature and molecular
- 25 branching. In practical use, these give rise to particular advantages in the relationship between wet skid resistance and rolling resistance of the tyre. Important contributions to energy dissipation and hence to rolling resistance in tyre treads result from free ends of polymer chains and from the reversible buildup and degradation of the filler network formed by the filler used in the tyre tread mixture (usually silica and/or carbon black).
- 30 The introduction of functional groups at the start of the polymer chains and/or end of the polymer chains enables physical or chemical attachment of the start of the chains and/or end of the chains to the filler surface. This restricts the mobility thereof and hence reduces energy dissipation under dynamic stress on the tyre tread. At the same time, these functional groups can improve the

dispersion of the filler in the tyre tread, which can lead to a weakening of the filler network and hence to further lowering of the rolling resistance.

Methods for introducing functional groups at the start of polymer chains by means of functional anionic polymerization initiators are described, for example, in EP 0 513 217 B1 and EP 0 675 140 B1 (initiators with a protected hydroxyl group), US 2008/0308204 A1 (thioether-containing initiators) and in US 5,792,820 and EP 0 590 490 B1 (alkali metal amides of secondary amines as polymerization initiators).

More particularly, EP 0 594 107 B1 describes the *in situ* use of secondary amines as functional polymerization initiators, but does not describe the chain end functionalization of the polymers.

In addition, numerous methods have been developed for introduction of functional groups at the end of polymer chains. For example, EP 0 180 141 A1 describes the use of 4,4'-bis(dimethylamino)benzophenone or N-methylcaprolactam as functionalization reagents. The use of ethylene oxide and N-vinylpyrrolidone is known from EP 0 864 606 A1. A number of further possible functionalization reagents are detailed in US 4,417,029.

Especially silanes having a total of at least two halogen and/or alkyloxy and/or aryloxy substituents on silicon are of good suitability for functionalization at the ends of the polymer chains of diene rubbers, since one of the said substituents on the silicon atom can be readily exchanged for an anionic diene polymer chain end and the further aforementioned substituent(s) on Si is/are available as a functional group which, optionally after hydrolysis, can interact with the filler of the tyre tread mixture. Examples of such silanes can be found in US 3,244,664, US 4,185,042, EP 0 890 580 A1.


However, many of the reagents mentioned for functionalization at the ends of the polymer chains have disadvantages, for example poor solubility in the process solvent, high toxicity or high volatility, which can lead to contamination of the recycled solvent. In addition, many of these functionalization reagents can react with more than one anionic polymer chain end, which leads to coupling reactions which are often troublesome and difficult to control. This is particularly true of the silanes mentioned. These also have the further disadvantage that reaction of these silanes with the anionic end of the polymer chain eliminates components such as halides or alkoxy groups, the latter being readily convertible to alcohols. Halides promote corrosion; alcohols can lead to contamination of the process solvent. A further disadvantage of the use of silanes as functionalization reagents is that the siloxane-terminated polymers obtained therefrom, after functionalization via the Si-OR groups at the ends of the polymer chains (or via the Si-OH groups after hydrolysis of the Si-OR groups), can couple to form Si-O-Si bonds, which leads to an unwanted rise in viscosity of the rubbers during processing and storage. Many methods for

reducing this rise in viscosity in siloxane-terminated polymers have been described, for example the addition of stabilizing reagents based on acid and acid halides (EP 0 801 078 A1), addition of siloxane (EP 1 198 506 B1), addition of long-chain alcohols (EP 1 237 934 B1) or addition of reagents to control the pH (EP 1 726 598).


EP 0 778 311 B1 describes, inter alia, cyclosiloxanes as functionalization reagents for introduction of Si-OH groups at the ends of the polymer chains. These cyclosiloxanes have the advantage over the abovementioned silanes that only one anionic end of the polymer chain in each case can react per cyclosiloxane molecule. Thus, during the functionalization reaction, no couplings take place through addition of more than one polymer chain per functionalization reagent. The Si-OH end groups formed after introduction of the functionalization reagents can, however, as explained above and also described in US 4,618,650, couple to form Si-O-Si bonds. Here too, there is thus the problem of the unwanted rise in viscosity during processing and storage.

It was therefore an object of the present invention to provide functionalized polymers which do not have the disadvantages of the prior art, and more particularly enable utilization of the good reactivity of silanes having anionic ends of the polymer chains without having the disadvantages thereof, for instance reaction of several anionic ends of polymer chains per silane molecule, elimination of troublesome components and coupling to form Si-O-Si bonds in the course of processing and storage.

For achievement of this object, functionalized diene polymers are proposed, these having, at the start of the polymer chains, tertiary amino groups of the formula (I) or (II)



or



where

R^1, R^2 are the same or different and are each alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

Z is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si,

and, at the end of the polymer chains, silane-containing carbinol groups of the formula (III)

5



or metal salts thereof or semimetal salts thereof, where


10

$\text{R}^3, \text{R}^4, \text{R}^5, \text{R}^6$ are the same or different and are each an H or alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

A is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si.

15

Preferably, the silane-containing carbinol groups of the formula (III) at the end of the polymer chains of the inventive functionalized diene polymers may be in the form of metal salts of the formula (IV):

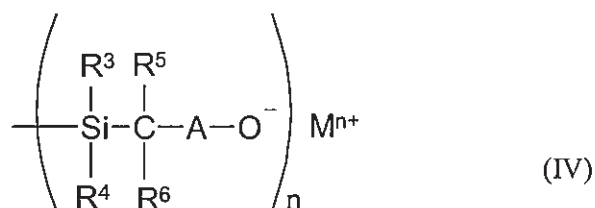

20

where

$\text{R}^3, \text{R}^4, \text{R}^5, \text{R}^6$ are the same or different and are each H, alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

A is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si,

25

n is an integer from 1 to 4,

M is a metal or semimetal of valency 1 to 4, preferably Li, Na, K, Mg, Ca, Fe, Co, Ni, Al, Nd, Ti, Si and/or Sn.

5 Preferred polymers for preparation of the inventive functionalized diene polymers are diene polymers, and diene copolymers obtainable by copolymerization of dienes with vinylaromatic monomers.

Preferred dienes are 1,3-butadiene, isoprene, 1,3-pentadiene, 2,3-dimethylbutadiene, 1-phenyl-1,3-butadiene and/or 1,3-hexadiene. Particular preference is given to using 1,3-butadiene and/or isoprene.

10 The vinylaromatic comonomers may, for example, be styrene, o-, m- and/or p-methylstyrene, p-tert-butylstyrene, α -methylstyrene, vinylnaphthalene, divinylbenzene, trivinylbenzene and/or divinyl-naphthalene. Particular preference is given to using styrene.

These polymers are preferably prepared by anionic solution polymerization.

15 Initiators for the anionic solution polymerization are alkali metal amides of secondary organic amines, for example lithium pyrrolidide, lithium piperidide, lithium hexamethyleneimide, lithium 1-methylimidazolidide, lithium 1-methylpiperazide, lithium morpholide, lithium diphenylamide, lithium dibenzylamide, lithium dicyclohexylamide, lithium dihexylamide, lithium dioctylamide. In addition, it is also possible to use difunctional alkali metal amides, for example dilithium piperazide.

20 These alkali metal amides are preferably prepared by reaction of the corresponding secondary amines with organo-alkali metal compounds. Preferred organo-alkali metal compounds for this purpose are *n*-butyllithium and *sec*-butyllithium. The alkali metal amides are preferably prepared *in situ* in the polymerization reactor by reaction of an organo-alkali metal compound with secondary amines. Preferred secondary amines are pyrrolidines, piperidines, hexamethyleneimines, 1-alkylimidazolidines, 1-alkylpiperazines, morpholines, N,N-diphenylamines, N,N-dibenzylamines, 25 N,N-dicyclohexylamine, N,N-diethylamine, N,N-dioctylamine.

30 In addition, it is possible to use the known randomizers and control agents for the microstructure of the polymer, for example diethyl ether, di-*n*-propyl ether, diisopropyl ether, di-*n*-butyl ether, ethylene glycol dimethyl ether, ethylene glycol diethyl ether, ethylene glycol di-*n*-butyl ether, ethylene glycol di-*tert*-butyl ether, diethylene glycol dimethyl ether, diethylene glycol diethyl ether, diethylene glycol di-*n*-butyl ether, diethylene glycol di-*tert*-butyl ether, 2-(2-ethoxyethoxy)-2-methylpropane, triethylene glycol dimethyl ether, tetrahydrofuran, ethyl tetrahydrofurfuryl ether, hexyl tetrahydrofurfuryl ether, 2,2-bis(2-tetrahydrofuryl)propane, dioxane, trimethylamine,

triethylamine, N,N,N',N'-tetramethylethylenediamine, N-methylmorpholine, N-ethylmorpholine, 1,2-dipiperidinoethane, 1,2-dipyrrolidinoethane, 1,2-dimorpholinoethane and potassium and sodium salts of alcohols, phenols, carboxylic acids, sulphonic acids.

5 Such solution polymerizations are known and are described, for example, in I. Franta, *Elastomers and Rubber Compounding Materials*; Elsevier 1989, pages 113 – 131, in Houben-Weyl, *Methoden der Organischen Chemie [Methods of Organic Chemistry]*, Thieme Verlag, Stuttgart, 1961, volume XIV/1 pages 645 to 673 or in volume E 20 (1987), pages 114 to 134 and pages 134 to 153, and in *Comprehensive Polymer Science*, Vol. 3, Part I (Pergamon Press Ltd., Oxford 1989), pages 365-386.

10 The preparation of the preferred diene polymers preferably takes place in a solvent. The solvents used for the polymerization are preferably inert aprotic solvents, for example paraffinic hydrocarbons, such as isomeric butanes, pentanes, hexanes, heptanes, octanes, decanes, cyclopentane, cyclohexane, methylcyclohexane, ethylcyclohexane or 1,4-dimethylcyclohexane or aromatic hydrocarbons, such as benzene, toluene, ethylbenzene, xylene, diethylbenzene or
15 propylbenzene. These solvents can be used individually or in combination. Preference is given to cyclohexane and n-hexane. Blending with polar solvents is likewise possible.

The amount of solvent in the process according to the invention is typically 100 to 1000 g, preferably 200 to 700 g, based on 100 g of the total amount of monomer used. However, it is also possible to polymerize the monomers used in the absence of solvents.


20 The polymerization can be performed in such a way that the monomers, optionally control agents to adjust the microstructure and the solvents are initially charged and then the polymerization is started by adding the initiator. Polymerization in a feed process is also possible, in which the polymerization reactor is filled by addition of monomers, optionally control agents to adjust the microstructure and solvents, the initiator being initially charged or added with the monomers,
25 optionally control agents to adjust the microstructure and the solvent. Variations are possible, such as initial charging of the solvent in the reactor, addition of the initiator and then addition of the monomers and optionally control agents to adjust the microstructure. In addition, the polymerization can be operated in a continuous mode. Further addition of monomer, control agent and solvent during or at the end of the polymerization is possible in all cases.

30 In a preferred embodiment, the monomers, optionally control agents to adjust the microstructure, the solvent and a secondary amine are initially charged, and the polymerization is started by addition of an organo-alkali metal compound, such as BuLi, with formation of the alkali metal amide initiator *in situ* through reaction of the organo-alkali metal compound with the secondary amine.


The polymerization time may vary within wide limits from a few minutes to a few hours. Typically, the polymerization is performed within a period of about 10 minutes up to 8 hours, preferably 20 minutes to 4 hours. It can be performed either at standard pressure or at elevated pressure (1 to 10 bar).

- 5 It has been found that, surprisingly, through the use of alkali metal amide polymerization initiators for introduction of tertiary amino groups at the start of the polymer chains in combination with the use of one or more 1-oxa-2-silacycloalkanes as functionalization reagents for introduction of functional groups at the end of the polymer chains, it is possible to prepare diene polymers which have improved tyre tread properties and do not have the disadvantages of the prior art. For
10 example, couplings through multiple reactions of the functionalization reagent, elimination of troublesome components and couplings through formation of Si-O-Si bonds in the course of workup and storage cannot take place.

The alkali metal amide polymerization initiators are compounds of the general formula (V) or (VI)




- 15 or



where

- R^1, R^2 are the same or different and are each alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,
- 20 Z is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si,
- M is Li, Na, K.

The 1-oxa-2-silacycloalkanes are compounds of the general formula (VII)

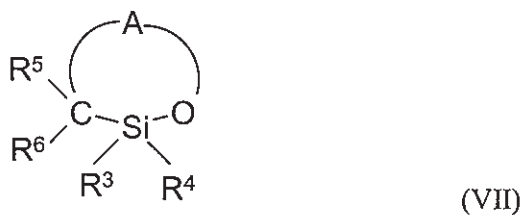

where


R^3, R^4, R^5, R^6 are the same or different and are each H, alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

5 A is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si.

The silicon atom of the formula (VII) is monofunctional, "monofunctional" being understood to mean that the silicon atom has three Si-C bonds and one Si-O bond.


Examples of compounds of the formula (VII) are:

10 2,2-dimethyl-1-oxa-2-silacyclohexane




2,2-diethyl-1-oxa-2-silacyclohexane

15




2,2-dipropyl-1-oxa-2-silacyclohexane

20




2-methyl-2-phenyl-1-oxa-2-silacyclohexane




5

2,2-diphenyl-1-oxa-2-silacyclohexane




10

2,2,5,5-tetramethyl-1-oxa-2-silacyclohexane




15

2,2,3-trimethyl-1-oxa-2-silacyclohexane




2,2-dimethyl-1-oxa-2-silacyclopentane




20

2,2,4-trimethyl-1-oxa-2-silacyclopentane




5 2,2-dimethyl-1,4-dioxo-2-silacyclohexane




2,2,5,5-tetramethyl-1,4-dioxo-2,5-disilacyclohexane

10




2,2,4-trimethyl-[1,4,2]oxazasilinane

15




benzo-2,2-dimethyl-1,4-dioxo-2-silacyclohexane



benzo-2,2,4-trimethyl-1-oxa-4-aza-2-silacyclohexane

20



It has been found that the inventive functionalized diene polymers can be prepared by reaction of reactive ends of polymer chains with 1-oxa-2-silacycloalkanes and optional subsequent protonation of the alkoxide end group to give the alcohol.

5 Thus, the invention also provides for the use of 1-oxa-2-silacycloalkanes as functionalization reagents for preparation of the inventive functionalized diene polymers having end groups of the formula (III) or (IV).

10 The inventive functionalized diene polymers preferably have mean molar masses (number-average) of 10 000 to 2 000 000 g/mol, preferably 100 000 to 1 000 000 g/mol, and glass transition temperatures of -110°C to +20°C, preferably -110°C to 0°C, and Mooney viscosities ML 1+4 (100°C) of 10 to 200, preferably 30 to 150, Mooney units.

15 The invention further provides a process for preparing the inventive functionalized diene polymers, according to which alkali metal amides of secondary organic amines are used as polymerization initiators, as are one or more compounds of the formula (VII), as a pure substance, solution or suspension, for reaction with the reactive ends of the polymer chains. The compounds of the formula (VII) are preferably added after the polymerization has concluded, but they can also be added prior to complete monomer conversion. The reaction of compounds of the formula (VII) with the reactive ends of the polymer chains is effected at the temperatures customarily used for the polymerization. The reaction times for the reaction of compounds according to formula (VII) with the reactive ends of the polymer chains may be between a few minutes and several hours.

20 The alkali metal amides used are preferably in solution. Preference is given to using the same solvent which is also used for the polymerization. However, it is also possible to use solvents or solvent mixtures with relatively high polarity, in order to prevent precipitation of the alkali metal amides.

25 Preference is given to a process for preparing the inventive functionalized diene polymers in which the polymerization initiators are obtained by reaction of secondary amine with organo-alkali metal compounds in a separate preforming step or *in situ* directly in the polymerization reactor for formation of alkali metal amides, and one or more compounds of the formula (VII) are used, as a pure substance, solution or suspension, for reaction with the reactive ends of the polymer chains. The compounds of the formula (VII) are preferably added after the polymerization has concluded, but they can also be added prior to complete monomer conversion. The reaction of compounds of the formula (VII) with the reactive ends of the polymer chains is effected at the temperatures customarily used for the polymerization. The reaction times for the reaction of compounds according to formula (VII) with the reactive ends of the polymer chains may be between a few minutes and several hours.

30

The amount of secondary amines is preferably less than or equal to the amount of organo-alkali metal compounds, particular preference being given to a molar ratio between secondary amines and organo-alkali metal compounds of 0.05 – 2.00:0.05 – 2.00.

5 It has been found that, with this ratio, the ends of the polymer chains are functionalized with silane-containing carbinol compounds, so as to form polymers with functionalization at both ends, these having improved tyre tread properties, with avoidance of couplings through multiple reactions of the functionalization reagent, elimination of troublesome components and couplings through formation of Si-O-Si bonds in the course of workup and storage of the polymers.

10 The amount of the 1-oxa-2-silacycloalkanes of the formula (VII) can be selected such that all the reactive ends of the polymer chains react with compounds of the formula (VII), or it is possible to use a deficiency of these compounds. The amounts of the compounds of formula (VII) used may cover a wide range. The preferred amounts are between 0.005 – 2% by weight, more preferably between 0.01 - 1% by weight, based on the amount of polymer.

15 In addition to compounds of formula (VII), it is also possible to use the coupling reagents typical of anionic diene polymerization for reaction with the reactive ends of polymer chains. Examples of such coupling reagents are silicon tetrachloride, methyltrichlorosilane, dimethyldichlorosilane, tin tetrachloride, dibutyltin dichloride, tetraalkoxysilanes, ethylene glycol diglycidyl ether, 1,2,4-tris(chloromethyl)benzene. Such coupling reagents can be added prior to, together with or after the compounds of the formula (VII).

20 On completion of addition of compounds of the formula (VII) and optionally of coupling reagents, before or during the workup of the inventive functionalized polymers, preference is given to adding the customary ageing stabilizers, such as sterically hindered phenols, aromatic amines, phosphites, thioethers. In addition, it is possible to add the customary extender oils used for diene rubbers, such as DAE (Distillate Aromatic Extract), TDAE (Treated Distillate Aromatic Extract), MES (Mild
25 Extraction Solvates), RAE (Residual Aromatic Extract), TRAE (Treated Residual Aromatic Extract), naphthenic and heavy naphthenic oils. It is also possible to add fillers, such as carbon black and silica, rubbers and rubber auxiliaries.

30 The solvent can be removed from the polymerization process by the customary methods, such as distillation, stripping with steam or application of reduced pressure, optionally at elevated temperature.

The invention further provides for the use of the inventive functionalized polymers for production of vulcanizable rubber compositions.

These vulcanizable rubber compositions preferably comprise further rubbers, fillers, rubber chemicals, processing aids and extender oils.

Additional rubbers are, for example, natural rubber and synthetic rubbers. If present, the amount thereof is preferably within the range from 0.5 to 95%, preferably 10 to 80%, by weight, based on the total amount of polymer in the mixture. The amount of rubbers additionally added is again guided by the respective end use of the inventive mixtures.

Synthetic rubbers known from the literature are listed here by way of example. They comprise, inter alia,

	BR	-	polybutadiene
10	ABR	-	butadiene/C ₁ -C ₄ -alkyl acrylate copolymers
	IR	-	polyisoprene
	E-SBR	-	styrene-butadiene copolymers having styrene contents of 1-60%, preferably 20-50%, by weight, prepared by emulsion polymerization
15	S-SBR	-	styrene-butadiene copolymers having styrene contents of 1-60%, preferably 15-45%, by weight, prepared by solution polymerization
	IIR	-	isobutylene-isoprene copolymers
	NBR	-	butadiene-acrylonitrile copolymers having acrylonitrile contents of 5-60%, preferably 10-40%, by weight
	HNBR	-	partly hydrogenated or fully hydrogenated NBR rubber
20	EPDM	-	ethylene-propylene-diene terpolymers

and mixtures of these rubbers. For the production of car tyres, particularly natural rubber, E-SBR and S-SBR having a glass transition temperature above -60°C, polybutadiene rubber which has a high cis content (> 90%) and has been prepared with catalysts based on Ni, Co, Ti or Nd, and polybutadiene rubber having a vinyl content of up to 80% and mixtures thereof are of interest.

Useful fillers for the inventive rubber compositions include all known fillers used in the rubber industry. These include both active and inactive fillers.

The following should be mentioned by way of example:

- finely divided silicas, produced, for example, by precipitation of solutions of silicates or flame hydrolysis of silicon halides having specific surface areas of 5-1000, preferably 20-400, m²/g (BET surface area) and having primary particle sizes of 10-400 nm. The silicas may optionally also be present as mixed oxides with other metal oxides, such as oxides of Al, Mg, Ca, Ba, Zn, Zr, Ti;
- synthetic silicates, such as aluminium silicate, alkaline earth metal silicates such as magnesium silicate or calcium silicate, having BET surface areas of 20-400 m²/g and primary particle diameters of 10-400 nm;
- natural silicates, such as kaolin and other naturally occurring silica;
- glass fibres and glass fibre products (mats, strands) or glass microspheres;
- metal oxides, such as zinc oxide, calcium oxide, magnesium oxide, aluminium oxide;
- metal carbonates, such as magnesium carbonate, calcium carbonate, zinc carbonate;
- metal hydroxides, for example aluminium hydroxide, magnesium hydroxide;
- metal sulphates, such as calcium sulphate, barium sulphate;
- carbon blacks: The carbon blacks to be used here are carbon blacks produced by the lamp black, channel black, furnace black, gas black, thermal black, acetylene black or light arc process and have BET surface areas of 9 – 200 m²/g, for example SAF, ISAF-LS, ISAF-HM, ISAF-LM, ISAF-HS, CF, SCF, HAF-LS, HAF, HAF-HS, FF-HS, SPF, XCF, FEF-LS, FEF, FEF-HS, GPF-HS, GPF, APF, SRF-LS, SRF-LM, SRF-HS, SRF-HM and MT carbon blacks, or ASTM N110, N219, N220, N231, N234, N242, N294, N326, N327, N330, N332, N339, N347, N351, N356, N358, N375, N472, N539, N550, N568, N650, N660, N754, N762, N765, N774, N787 and N990 carbon blacks;
- rubber gels, especially those based on BR, E-SBR and/or polychloroprene having particle sizes of 5 to 1000 nm.

25 The fillers used are preferably finely divided silicas and/or carbon blacks.

The fillers mentioned can be used alone or in a mixture. In a particularly preferred embodiment, the rubber compositions comprise, as fillers, a mixture of light-coloured fillers, such as finely divided silicas, and carbon blacks, the mixing ratio of light-coloured fillers to carbon blacks being 0.01:1 to 50:1, preferably 0.05:1 to 20:1.

The fillers are used here in amounts in the range from 10 to 500 parts by weight based on 100 parts by weight of rubber. Preference is given to using 20 to 200 parts by weight.

5 In a further embodiment of the invention, the rubber compositions also comprise rubber auxiliaries which, for example, improve the processing properties of the rubber compositions, serve to crosslink the rubber compositions, improve the physical properties of the vulcanizates produced from the inventive rubber compositions for the specific end use thereof, improve the interaction between rubber and filler, or serve for attachment of the rubber to the filler.

10 Rubber auxiliaries are, for example, crosslinker agents, for example sulphur or sulphur-supplying compounds, and also reaction accelerators, ageing stabilizers, heat stabilizers, light stabilizers, antiozonants, processing aids, plasticizers, tackifiers, blowing agents, dyes, pigments, waxes, extenders, organic acids, silanes, retardants, metal oxides, extender oils, for example DAE (Distillate Aromatic Extract), TDAE (Treated Distillate Aromatic Extract), MES (Mild Extraction Solvates), RAE (Residual Aromatic Extract), TRAE (Treated Residual Aromatic Extract), naphthenic and heavy naphthenic oils and activators.

15 The total amount of rubber auxiliaries is within the range from 1 to 300 parts by weight, based on 100 parts by weight of overall rubber. Preference is given to using 5 to 150 parts by weight of rubber auxiliaries.

20 The vulcanizable rubber compositions can be produced in a one-stage or in a multistage process, preference being given to 2 to 3 mixing stages. For example, sulphur and accelerator can be added in a separate mixing stage, for example on a roller, preferred temperatures being in the range of 30°C to 90°C. Preference is given to adding sulphur and accelerator in the last mixing stage.

Examples of equipment suitable for the production of the vulcanizable rubber compositions include rollers, kneaders, internal mixers or mixing extruders.

25 Thus, the invention further provides vulcanizable rubber compositions comprising functionalized diene polymers having tertiary amino groups of the formula (I) or (II) at the start of the polymer chains and functional groups of the formula (III) or (IV) at the end of the polymer chains.

The rubber compositions may also comprise functionalized diene polymers having tertiary amino groups of the formula (I) or (II) at the start of the polymer chains and functional groups of the formula (III) and (IV) at the end of the polymer chains.

30 The invention further provides for the use of the inventive vulcanizable rubber compositions for production of rubber vulcanizates, especially for the production of tyres, especially tyre treads,

having particularly low rolling resistance coupled with high wet skid resistance and abrasion resistance.

5 The inventive vulcanizable rubber compositions are also suitable for production of mouldings, for example for the production of cable sheaths, hoses, drive belts, conveyor belts, roll covers, shoe soles, sealing rings and damping elements.

The examples which follow serve to illustrate the invention but have no limiting effect.

Examples

Example 1a: Synthesis of styrene-butadiene copolymer, unfunctionalized (Comparative Example)

An inertized 20 l reactor was charged with 8.5 kg of hexane, 1185 g of 1,3-butadiene, 315 g of styrene, 8 mmol of 2,2-bis(2-tetrahydrofuryl)propane and 10.3 mmol of n-butyllithium, and the contents were heated to 65°C. Polymerization was effected with stirring at 65°C for 25 min. Subsequently, 10.3 mmol of cetyl alcohol were added, the rubber solution was discharged and stabilized by addition of 3 g of Irganox® 1520 (2,4-bis(octylthiomethyl)-6-methylphenol), and the solvent was removed by stripping with steam. The rubber crumbs were dried at 65°C under reduced pressure.

Vinyl content (IR spectroscopy): 50.2% by weight; styrene content (IR spectroscopy): 20.9% by weight, glass transition temperature (DSC): -25.6°C; number-average molecular weight M_n (GPC, PS standard): 258 kg/mol; M_w/M_n : 1.15; Mooney viscosity (ML1+4 at 100°C): 52 ME

Example 1b: Synthesis of styrene-butadiene copolymer with tertiary amino group at the start of the chain (Comparative Example)

An inertized 20 l reactor was charged with 8.5 kg of hexane, 1185 g of 1,3-butadiene, 315 g of styrene, 11.3 mmol of 2,2-bis(2-tetrahydrofuryl)propane, 14.1 mmol of pyrrolidine and 14.1 mmol of n-butyllithium, and the contents were heated to 65°C. Polymerization was effected with stirring at 65°C for 25 min. Subsequently, 14.1 mmol of cetyl alcohol were added, the rubber solution was discharged and stabilized by addition of 3 g of Irganox® 1520, and the solvent was removed by stripping with steam. The rubber crumbs were dried at 65°C under reduced pressure.

Vinyl content (IR spectroscopy): 50.0% by weight; styrene content (IR spectroscopy): 20.8% by weight, glass transition temperature (DSC): -25.9°C; number-average molecular weight M_n (GPC, PS standard): 210 kg/mol; M_w/M_n : 1.19; Mooney viscosity (ML1+4 at 100°C): 41 ME

Example 1c: Synthesis of styrene-butadiene copolymer with functionalization at the end of the chain by reaction with functionalization reagent of the formula (VII) (Comparative Example)

An inertized 20 l reactor was charged with 8.5 kg of hexane, 1185 g of 1,3-butadiene, 315 g of styrene, 8.2 mmol of 2,2-bis(2-tetrahydrofuryl)propane and 10.55 mmol of n-butyllithium, and the contents were heated to 65°C. Polymerization was effected with stirring at 65°C for 25 min. Thereafter, 10.55 mmol (1.69 ml) of 2,2,4-trimethyl-[1,4,2]oxazasilinane were added, and the reactor contents were heated to 65°C for a further 20 min. Subsequently, the rubber solution was discharged and stabilized by addition of 3 g of Irganox® 1520, and the solvent was removed by stripping with steam. The rubber crumbs were dried at 65°C under reduced pressure.

Vinyl content (IR spectroscopy): 50.3% by weight; styrene content (IR spectroscopy): 20.9% by weight, glass transition temperature (DSC): -25.7°C; number-average molecular weight M_n (GPC, PS standard): 216 kg/mol; M_w/M_n : 1.18; Mooney viscosity (ML1+4 at 100°C): 44 ME

Example 1d: Synthesis of styrene-butadiene copolymer with tertiary amino group at the start of the chain and functionalization at the end of the chain by reaction with functionalization reagent of the formula (VII) (inventive)

An inertized 20 l reactor was charged with 8.5 kg of hexane, 1185 g of 1,3-butadiene, 315 g of styrene, 11.3 mmol of 2,2-bis(2-tetrahydrofuryl)propane, 14.1 mmol of pyrrolidine and 14.1 mmol of n-butyllithium, and the contents were heated to 65°C. Polymerization was effected with stirring at 65°C for 25 min. Thereafter, 14.1 mmol (2.26 ml) of 2,2,4-trimethyl-[1,4,2]oxazasilinane were added, and the reactor contents were heated to 65°C for a further 20 min. Subsequently, the rubber solution was discharged and stabilized by addition of 3 g of Irganox® 1520, and the solvent was removed by stripping with steam. The rubber crumbs were dried at 65°C under reduced pressure.

Vinyl content (IR spectroscopy): 49.3% by weight; styrene content (IR spectroscopy): 20.3% by weight, glass transition temperature (DSC): -26.3°C; number-average molecular weight M_n (GPC, PS standard): 170 kg/mol; M_w/M_n : 1.29; Mooney viscosity (ML1+4 at 100°C): 43 ME

Examples 2 a-d: rubber compositions

Rubber compositions for tyre treads were produced using the styrene-butadiene copolymers of Examples 1a – 1d.

5 The constituents are listed in Table 1. The rubber compositions (apart from sulphur and crosslinker) were produced in a 1.5 l kneader. Sulphur and accelerator were subsequently mixed in on a roller at 40°C.

Examples 3 a-d: vulcanizate properties

10 To determine the vulcanizate properties, the rubber compositions of Examples 2a-d were vulcanized at 160°C for 20 minutes. The properties of the corresponding vulcanizates are listed in Table 2 as Examples 3a-d.

Using the vulcanizates, the following properties were determined:

- resilience at 60°C (to DIN 53512)
- abrasion (to DIN 53516)
- ΔG^* : difference between the frequency-dependent viscoelastic moduli G^* at 0.5% elongation and 15% elongation at 60°C/1Hz (MTS amplitude sweep)
- $\tan\delta$ maximum: maximum dynamic damping in the measurement of the frequency-dependent viscoelastic modulus at 60°C/1 Hz, where $\tan\delta = G''/G'$ (MTS amplitude sweep)
- $\tan\delta$ at 0°C, 60°C: from the measurement of temperature-dependent dynamic damping to DIN 53513 (10 Hz, heating rate 1K·min⁻¹), where $\tan\delta = E''/E'$
- elongation at break, tensile stress at yield (to DIN 53504)

25 Resilience at 60°C, ΔG^* , $\tan\delta$ maximum (MTS) and $\tan\delta$ at 60°C are indicators of the hysteresis loss as the tyre rolls (rolling resistance). The higher the resilience at 60°C and the lower the ΔG^* , $\tan\delta$ maximum (MTS) and $\tan\delta$ at 60°C, the lower the rolling resistance of the tyre. $\tan\delta$ at 0°C is a measure of wet skid resistance of the tyre. The higher the $\tan\delta$ at 0°C, the higher the expected wet skid resistance of the tyre.

Table 1: Constituents of the rubber compositions (figures in phr: parts by weight per 100 parts by weight of rubber)

	Comparative Example 2a	Comparative Example 2b	Comparative Example 2c	Inventive Example 2d
styrene-butadiene copolymer according to Example 1a	70	0	0	0
styrene-butadiene copolymer according to Example 1b	0	70	0	0
styrene-butadiene copolymer according to Example 1c	0	0	70	0
styrene-butadiene copolymer, according to Example 1d	0	0	0	70
high-cis polybutadiene (BUNA TM CB 24 from Lanxess Deutschland GmbH)	30	30	30	30
silica (Ultrasil® 7000)	90	90	90	90
carbon black (Vulcan® J/N 375)	7	7	7	7
TDAE oil (Vivatec 500)	36.3	36.3	36.3	36.3
processing aid (Aflux 37 from Rheinchemie Rheinau GmbH)	3	3	3	3
stearic acid (Edenor C 18 98-100)	1	1	1	1
ageing stabilizer (Vulkanox® 4020/LG from Lanxess Deutschland GmbH)	2	2	2	2
ageing stabilizer (Vulkanox® HS/LG from Lanxess Deutschland GmbH)	2	2	2	2
zinc oxide (Rotsiegel zinc white)	3	3	3	3
wax (Antilux 654)	2	2	2	2
silane (Si 69® from Evonik)	7.2	7.2	7.2	7.2
diphenylguanidine (Rhenogran DPG 80)	2.75	2.75	2.75	2.75
sulphenamide (Vulkacit® NZ/EGC from Lanxess)	1.6	1.6	1.6	1.6
sulphur (Chancel 90/95 ground sulphur)	1.6	1.6	1.6	1.6
sulphonamide (Vulkalent® E/C)	0.2	0.2	0.2	0.2

Table 2: vulcanizate properties


	Comparative Example 3a	Comparative Example 3b	Comparative Example 3c	Inventive Example 3d
Comparative Example 2a	X			
Comparative Example 2b		X		
Comparative Example 2c			X	
Comparative Example 2d				X
Vulcanizate properties:				
Resilience at 60°C [%]	56.2	57.2	58.7	59.2
ΔG^* ($G^*_{@0.5\%} - G^*_{@15\%}$) [MPa]	1.37	1.37	1.08	0.78
$\tan \delta$ maximum (MTS amplitude sweep at 1 Hz, 60°C)	0.173	0.161	0.156	0.141
$\tan \delta$ at 0°C (dynamic damping at 10Hz)	0.269	0.263	0.279	0.294
$\tan \delta$ at 60°C (dynamic damping at 10 Hz)	0.103	0.093	0.085	0.077
Elongation at break (S2 specimen) [%]	457	414	449	422
Tensile stress at yield (S2 specimen) [MPa]	19.4	18.6	20.8	20.4
Abrasion (DIN 53516) [mm ³]	69	70	74	73

5 Tyre applications require a low rolling resistance, which exists when a high value for resilience at 60°C and a low $\tan\delta$ value in dynamic damping at high temperature (60°C), and a low $\tan\delta$ maximum in the MTS amplitude sweep, are measured in the vulcanizate. As is clear from Table 2, the vulcanizate of Inventive Example 3d is notable for high resilience at 60°C, a low $\tan\delta$ value in dynamic damping at 60°C and a low $\tan\delta$ maximum in the MTS amplitude sweep.


Tyre applications additionally require a low wet skid resistance, which exists when the vulcanizate has a high $\tan\delta$ value in dynamic damping at low temperature (0°C). As is clear from Table 2, the vulcanizate of Inventive Example 3d is notable for a high $\tan\delta$ value in dynamic damping at 0°C.

Claims

1. Diene polymers, characterized in that the diene polymers have, at the start of the polymer chains, tertiary amino groups of the formula (I) or (II)



or



where

R^1, R^2 are the same or different and are each alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

Z is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si,

and, at the end of the polymer chains, silane-containing carbinol groups of the formula (III)




or metal salts thereof or semimetal salts thereof, where

$\text{R}^3, \text{R}^4, \text{R}^5, \text{R}^6$ are the same or different and are each an H or alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

A is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si.

2. Diene polymers according to Claim 1, characterized in that the silane-containing carbinol groups of the formula (III) at the end of the polymer chains of the diene polymers are in the form of metal salts of the formula (IV)

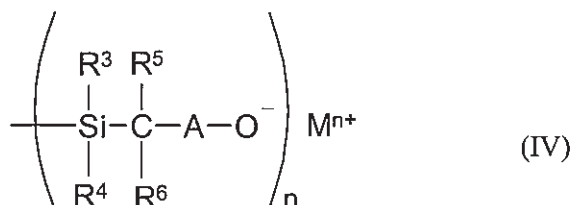

where

$\text{R}^3, \text{R}^4, \text{R}^5, \text{R}^6$ are the same or different and are each an H or alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

A is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si,

n is an integer from 1 to 4,

M is a metal or semimetal of valency 1 to 4, preferably Li, Na, K, Mg, Ca, Fe, Co, Ni, Al, Nd, Ti, Si and/or Sn.


3. Diene polymers according to Claim 1 or 2, characterized in that the diene polymer is a polybutadiene, a polyisoprene, a butadiene-isoprene copolymer, a butadiene-styrene copolymer, an isoprene-styrene copolymer or a butadiene-isoprene-styrene terpolymer.

4. Diene polymers according to Claim 1, characterized in that the diene polymers have mean molar masses (number-average) of 10 000 to 2 000 000 g/mol, preferably 100 000 to 1 000 000 g/mol.


5. Diene polymers according to Claim 1, characterized in that the diene polymers have glass transition temperatures of -110°C to +20°C, preferably -110°C to 0°C.

6. Diene polymers according to Claim 1, characterized in that the diene polymers have Mooney viscosities [ML 1+4 (100°C)] of 10 to 200, preferably 30 to 150, Mooney units.

7. Process for preparing diene polymers according to Claim 1, characterized in that the functionalization reagents used for introduction of functional groups at the end of the polymer chains are one or more 1-oxa-2-silacycloalkanes, and the tertiary amino groups at the start of the polymer chains are introduced using alkali metal amides of secondary organic amines of the general formula (V) or (VI)



or




where

- 10 R^1, R^2 are the same or different and are each alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

Z is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si,

M is Li, Na, K.

- 15 8. Process according to Claim 7, characterized in that the 1-oxa-2-silacycloalkanes are compounds of the general formula (VII)

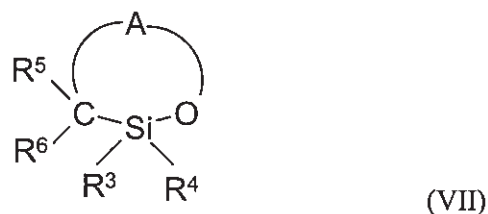

where

- 20 $\text{R}^3, \text{R}^4, \text{R}^5, \text{R}^6$ are the same or different and are each H, alkyl, cycloalkyl, aryl, alkaryl and aralkyl radicals which may contain heteroatoms such as O, N, S and/or Si,

A is a divalent organic radical which, as well as C and H, may contain heteroatoms such as O, N, S and/or Si.

9. Process for preparing diene polymers according to Claim 7, characterized in that alkali metal amides are obtained by reaction of secondary organic amines with organo-alkali metal compounds in situ or in a separate preforming step and one or more 1-oxa-2-silacycloalkanes are used for reaction with the reactive ends of the polymer chains.
10. Process according to Claim 7, characterized in that the 1-oxa-2-silacycloalkanes are added after completion of the polymerization.
11. Process according to Claim 9, characterized in that the alkali metal amides are used as anionic polymerization initiators.
12. Process according to Claim 9, characterized in that the secondary organic amines used are pyrrolidine or hexamethyleneimine, and the organo-alkali metal compound butyllithium.
13. Process according to Claim 9, characterized in that the molar amount of secondary amines is less than or equal to the molar amount of organo-alkali metal compounds, the molar ratio more preferably being 0.05 – 2.00:0.05 – 2.00.
14. Process according to Claim 7, characterized in that the amount of 1-oxa-2-silacycloalkanes is between 0.005 – 2% by weight, preferably between 0.01 – 1% by weight, based on the amount of polymer having reactive ends of the polymer chains.
15. Process according to Claim 7, characterized in that coupling reagents are used for the reaction.
16. Use of diene polymers according to any of Claims 1 - 6 for production of vulcanizable rubber compositions.
17. Vulcanizable rubber compositions obtainable according to Claim 16, characterized in that they comprise ageing stabilizers, oils, fillers, rubbers and/or rubber auxiliaries.
18. Vulcanizable rubber compositions comprising diene polymers according to Claim 1 or 2.
19. Vulcanizable rubber compositions comprising functionalized diene polymers having tertiary amino groups of the formula (I) or (II) at the start of the polymer chains and functional groups of the formula (III) at the end of the polymer chains according to Claim 1.

20. Vulcanizable rubber compositions comprising functionalized diene polymers having tertiary amino groups of the formula (I) or (II) at the start of the polymer chains according to Claim 1 and functional groups of the formula (IV) at the end of the polymer chains according to Claim 2.
- 5 21. Vulcanizable rubber compositions comprising functionalized diene polymers having tertiary amino groups of the formula (I) or (II) at the start of the polymer chains according to Claim 1 and functional groups of the formula (III) and (IV) at the end of the polymer chains according to Claims 1 and 2.
- 10 22. Use of the vulcanizable rubber compositions according to any of Claims 19 to 21 for production of tyres, especially tyre treads.
23. Use of the vulcanizable rubber compositions according to any of Claims 19 to 21 for production of mouldings, especially cable sheaths, hoses, drive belts, conveyor belts, roll covers, shoe soles, sealing rings and damping elements.
24. Tyres obtainable according to Claim 22.
- 15 25. Mouldings obtainable according to Claim 23.