



(51) International Patent Classification:

H02K 7/116 (2006.01) *B60K 7/00* (2006.01)
B60K 1/02 (2006.01)

(21) International Application Number:

PCT/SE2011/051354

(22) International Filing Date:

11 November 2011 (11.11.2011)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

1051196-2 15 November 2010 (15.11.2010) SE

(71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Örnköldsvik (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KARLSSON, Pontus** [SE/SE]; Nygatan 42, S-891 34 Örnköldsvik (SE). **PRINSBACK, Oskar** [SE/SE]; Krukmarkarvägen 4, S-891 77 Järved (SE).

(74) Agent: **ALBIHNS.ZACCO AB**; P.O. Box 5581, Valhallavägen 117, S-114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: ELECTRIC DRIVE DEVICE

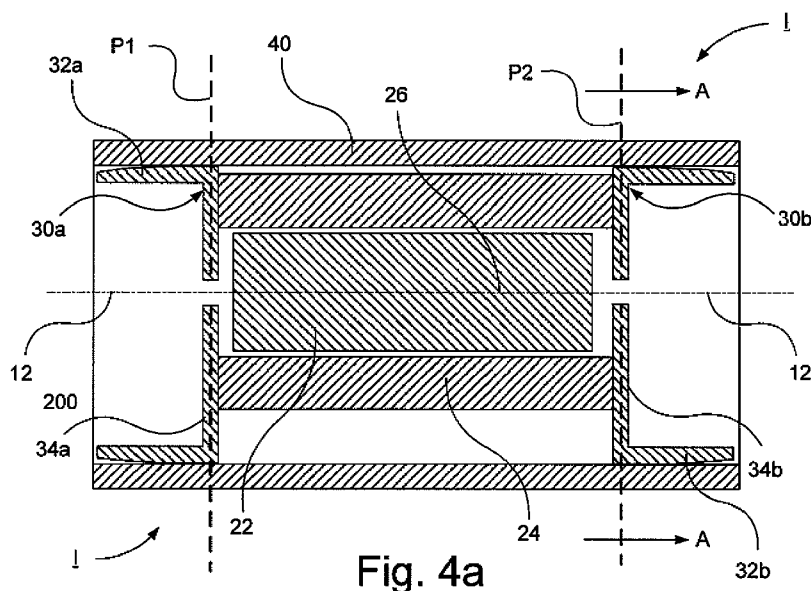


Fig. 4a

(57) Abstract: The present invention relates to an electric drive device comprising an electric motor (20) with a stator and a rotor arranged to rotate a drive shaft, wherein said electric motor (20) is arranged to be accommodated in a housing, further comprising opposite gear housings surrounding the electric motor, each containing a transmission configuration, wherein the electric drive device comprises a housing configuration in which the electric motor (20) as well as said opposite gear housings (30a, 30b) are accommodated, wherein each gear housing (30a, 30b; 130a, 130b) is attached and hereby locked to said housing configuration. The invention also relates to a motor vehicle.



Published:

— *with international search report (Art. 21(3))*