

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number
WO 2005/033610 A3

(51) International Patent Classification⁷: **F41C 33/02**

(21) International Application Number:
PCT/US2004/029556

(22) International Filing Date:
9 September 2004 (09.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/501,387 9 September 2003 (09.09.2003) US

(71) Applicant and

(72) Inventor: **RASSIAS, John, N.** [US/US]; 7678 Cedarwood Circle, Boca Raton, FL 33434 (US).

(74) Agents: **ZIESENHEIM, Frederick, B.** et al.; Webb, Ziesenheim, Logsdon, Orkin & Hanson, 700 Koppers Building, 436 Seventh Avenue, Pittsburgh, PA 15219-1818 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: SECURITY HOLSTER WITH LOCKING LEVER

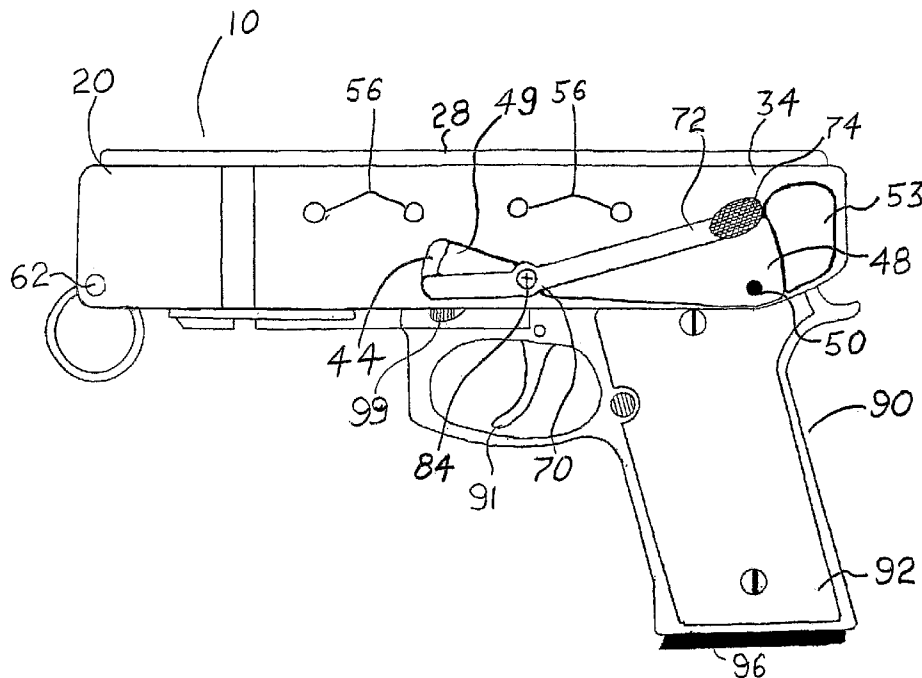

(57) Abstract: Holster (10) is provided having shroud (20) with top (28), sides (34, 34'), slide bearing stop (22) with hole (24) facing slide guard. Cam slot (44) is provided through shroud (20). Protuberance slots (36, 36') are provided in shroud (20) for receiving pistol protuberance (99). Screw (84) pivotally secures lever (70) to shroud (20). Lever (70) includes lever arm (72) having actuator (74) with bearing (76) and cam arm (78) having guide cam (80) positioned in cam slot (44) into side of shroud (20). A method for using holster is provided.

WO 2005/033610 A3



(88) Date of publication of the international search report:

15 December 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.