

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
19 May 2022 (19.05.2022)



(10) International Publication Number
WO 2022/101611 A1

- (51) **International Patent Classification:**
H01L 27/15 (2006.01) *H01L 33/50* (2010.01)
- (21) **International Application Number:**
PCT/GB2021/052887
- (22) **International Filing Date:**
08 November 2021 (08.11.2021)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2017935.4 13 November 2020 (13.11.2020) GB
- (71) **Applicant: PLESSEY SEMICONDUCTORS LTD**
[GB/GB]; Tamerton Road, Roborough, Plymouth Devon PL6 7BQ (GB).
- (72) **Inventors: MEZOUARI, Samir;** Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon PL6 7BQ (GB). **DUMAS, Geoff;** Plessey Semiconductors Ltd, Tamerton Road, Roborough, Plymouth Devon PL6 7BQ (GB).
- (74) **Agent: WITHERS & ROGERS LLP;** 2 London Bridge, London, Greater London SE1 9RA (GB).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) **Title:** PROCESS OF MAKING MONOLITHIC RGB ARRAY

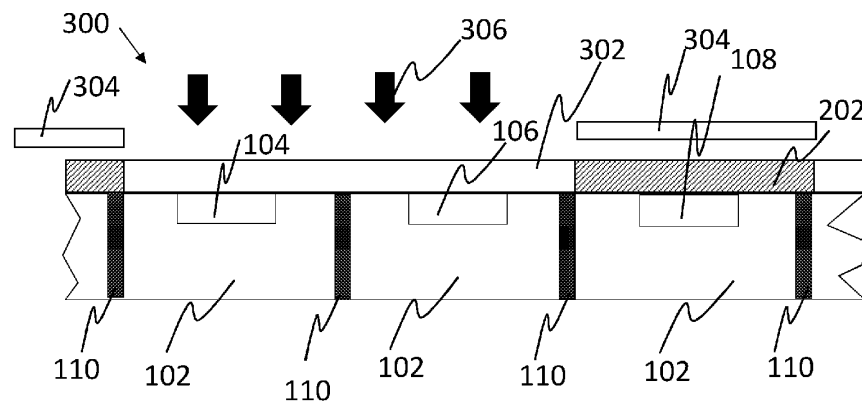


Figure 3

(57) **Abstract:** A method of forming a multicolour light emitting array, the method comprising: providing a first light emitting device configured to emit light with a first primary peak wavelength and a second light emitting device configured to emit light with the first primary peak wavelength; forming a colour conversion region at least partially associated with the first light emitting device and the second light emitting device, wherein the colour conversion region is configured to absorb light with the first primary peak wavelength and emit light with a second primary peak wavelength longer than the first primary peak wavelength; and photo-bleaching a portion of the colour conversion region associated with the first light emitting device such that the colour conversion region associated with the first light emitting device is at least partially transparent to light with the first primary peak wavelength, thereby to enable light with the first primary peak wavelength to be emitted by a first pixel associated with the first light emitting device and light with the second primary peak wavelength to be emitted by a second pixel associated with the second light emitting device.

[Continued on next page]

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*