



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B65D	A2	(11) International Publication Number: WO 00/35758 (43) International Publication Date: 22 June 2000 (22.06.00)
--	-----------	---

(21) International Application Number: PCT/GB99/04241

(22) International Filing Date: 15 December 1999 (15.12.99)

(30) Priority Data:
9827718.9 16 December 1998 (16.12.98) GB

(71) Applicant (for all designated States except US): THERMOTIC DEVELOPMENTS LIMITED [GB/GB]; 74 High Street, Bruton, Somerset BA10 0JA (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): SEARLE, Matthew, John [GB/GB]; 74 High Street, Bruton, Somerset BA10 0JA (GB).

(74) Agent: NEEDLE, Jacqueline; W.H. Beck, Greener & Co., 7 Stone Buildings, Lincoln's Inn, London WC2A 3SZ (GB).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

Without international search report and to be republished upon receipt of that report.

This Sheet Has Been Replaced



(54) Title: IMPROVEMENTS IN OR RELATING TO FLUID CONTAINERS

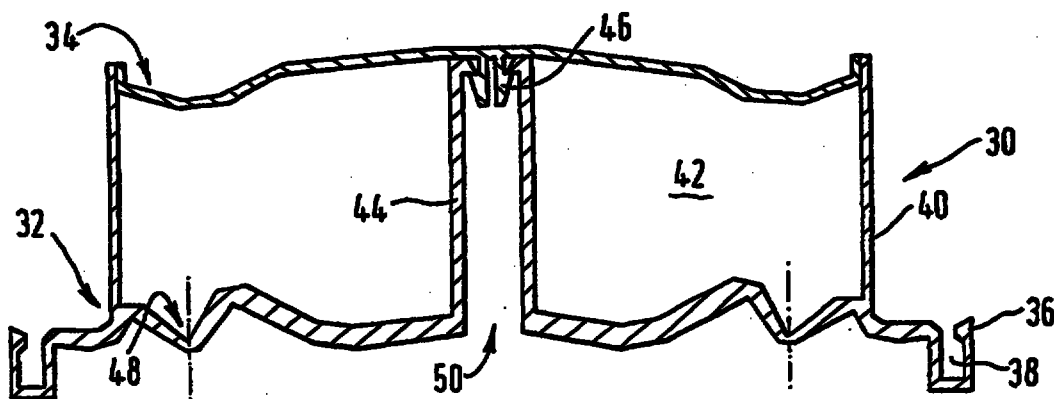

(57) Abstract

A closure (30) for a container is designed to facilitate the mixing of a first material within the container with a second material within the closure at the point of use. The first and second materials are generally chemically reactive. The plastics material closure (30) has a base (32) and a lid (34). The base (32), which is circular, has an annular peripheral rim (36) defining an annular recess (38) by which the closure (30) may be clipped onto a container (10). Radially inwardly of the rim (36) is an upstanding peripheral wall (40) defining a chamber (42) for containing the second material. A plunger (44) is affixed to the base (32) centrally of a convex button (50). When mixing of the first and second materials is required, the container (10) is positioned so that the base (32) of the closure is uppermost, and the button (50) is pressed to move the plunger (44) to push the lid (34) out of the opening of the chamber (42).