

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011784 A2

(51) International Patent Classification⁷: **F01N**
(21) International Application Number:
PCT/US2003/023802

(22) International Filing Date: 29 July 2003 (29.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/399,523 30 July 2002 (30.07.2002) US
10/620,059 15 July 2003 (15.07.2003) US

(71) Applicant: **EXXONMOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors: **GAO, Jason, Zhisheng**; 2 Buttonwood Way, Rose Valley, PA 19063 (US). **HAFEZ, Medi, Mostafa**; 1815 J.F. Kennedy Boulevard, Apt. 2205, Philadelphia, PA 19103 (US). **CONTI, Riccardo**; 20 Nottingham Road, Marlton, NJ 08053 (US).

(74) Agents: **FOSS, Norby, L.** et al.; Exxonmobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METHOD AND SYSTEM TO EXTEND LUBRICANT LIFE IN INTERNAL COMBUSTION EGR SYSTEMS

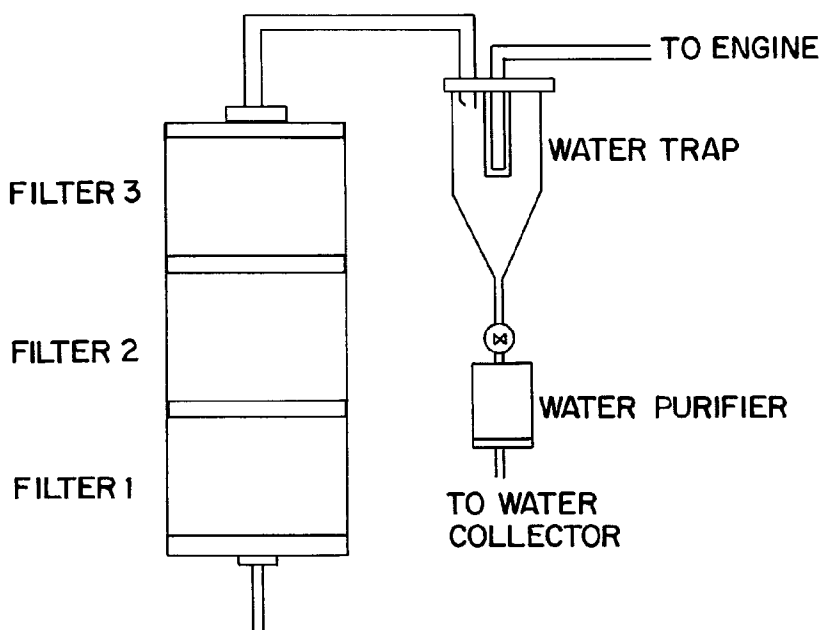

(57) Abstract: A device and method to extend the useful lubricant life in a diesel engine equipped with an Exhaust Gas Recirculation (EGR) system consisting of placing a chemical filter in an area of relatively higher humidity either in the EGR stream or near the intake manifold. In some cases, placing chemical filters in both locations would be preferred. This device may also be used in combination with a chemical filter placed in the lubricant recirculation system which produces a synergistic effect beyond the individual effects of either component.

WO 2004/011784 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.