



(51) International Patent Classification:

F28F 13/02 (2006.01) *F28F 1/10* (2006.01)
F23D 14/02 (2006.01) *C10G 9/14* (2006.01)
C10G 9/20 (2006.01)

(21) International Application Number:

PCT/US2011/024008

(22) International Filing Date:

8 February 2011 (08.02.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/302,304 8 February 2010 (08.02.2010) US

(71) Applicant (for all designated States except US): **LUM-MUS TECHNOLOGY INC.** [US/US]; 1515 Broad Street, Bloomfield, NJ 07003-3096 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCCARTHY, Frank D.** [US/US]; 151 Warbler Drive, Wayne, NJ

07470 (US). **DE HAAN, Stephen** [US/US]; 41 Mountainside Dr., Wayne, NJ 07470 (US).

(74) Agents: **BERGMAN, Jeffrey S.** et al.; Osha - Liang LLP, 909 Fannin Street, Suite 3500, Houston, TX 77010 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: A HEAT EXCHANGE DEVICE AND A METHOD OF MANUFACTURING THE SAME

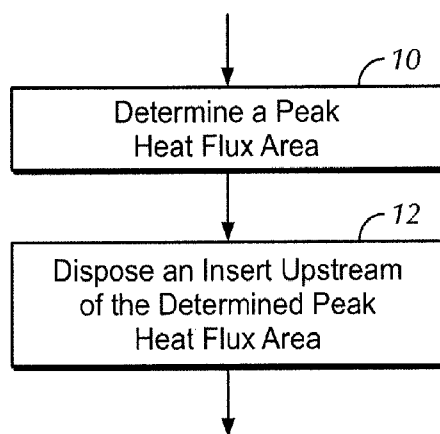


FIG. 1

(57) Abstract: A method of manufacturing a heat exchange device having at least one heat exchange tube is disclosed. The method includes: determining a peak heat flux area of the at least one heat exchange tube; and disposing in the at least one heat exchange tube an flow enhancement device for creating a desirable flow pattern in a process fluid flowing through the at least one heat exchange tube; wherein the flow enhancement device is disposed in the at least one heat exchange tube upstream of or at the determined peak heat flux area of the at least one heat exchange tube.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

(88) Date of publication of the international search report:

1 December 2011