

FIG. 1

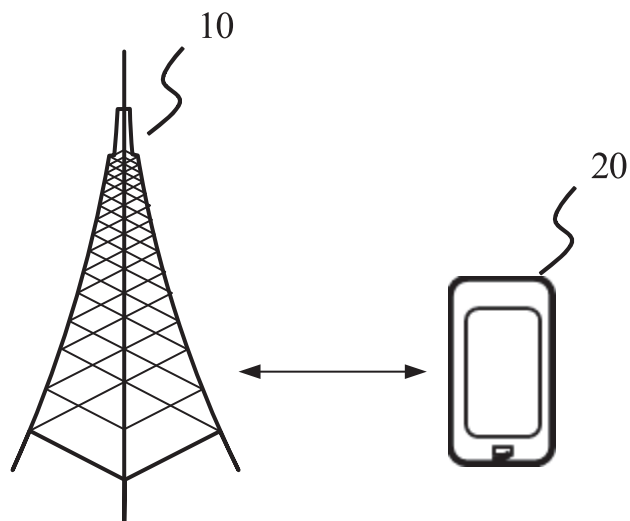


FIG. 2

In response to sensing that a target channel is idle,
the base station sends slot format indication
information to a UE 301

FIG. 3

The UE receives the slot format indication
information sent by the base station 401

FIG. 4

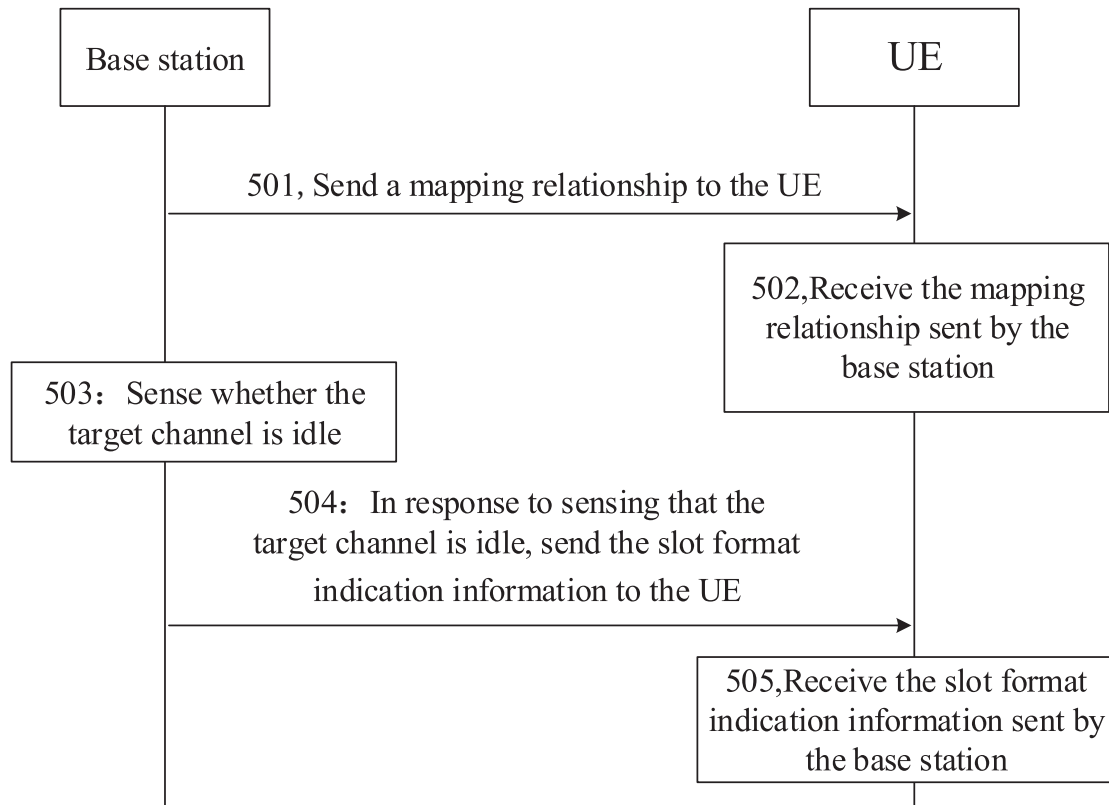


FIG. 5

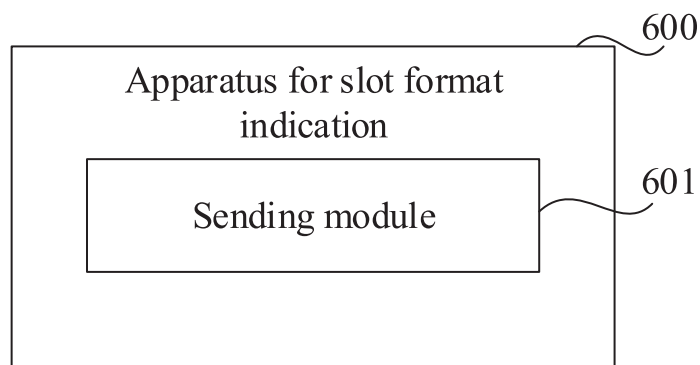


FIG. 6

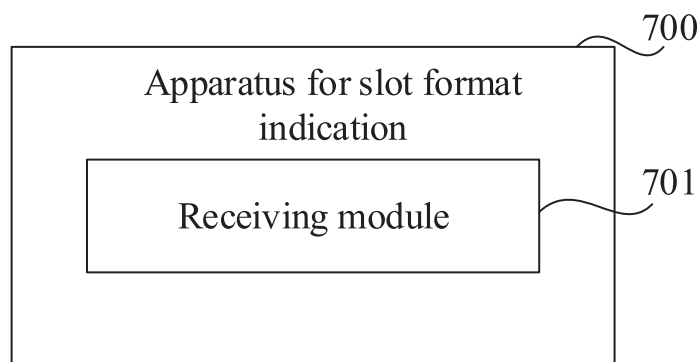


FIG. 7

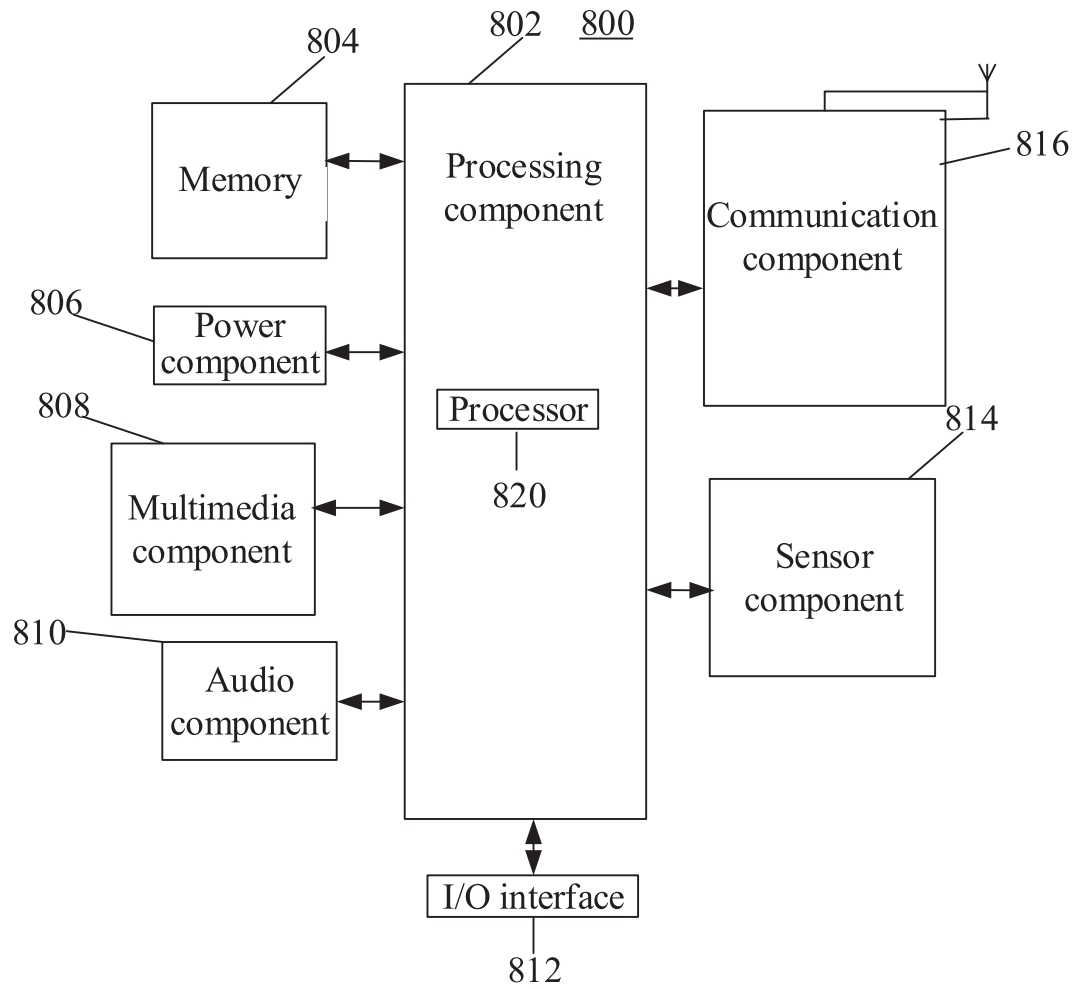


FIG. 8

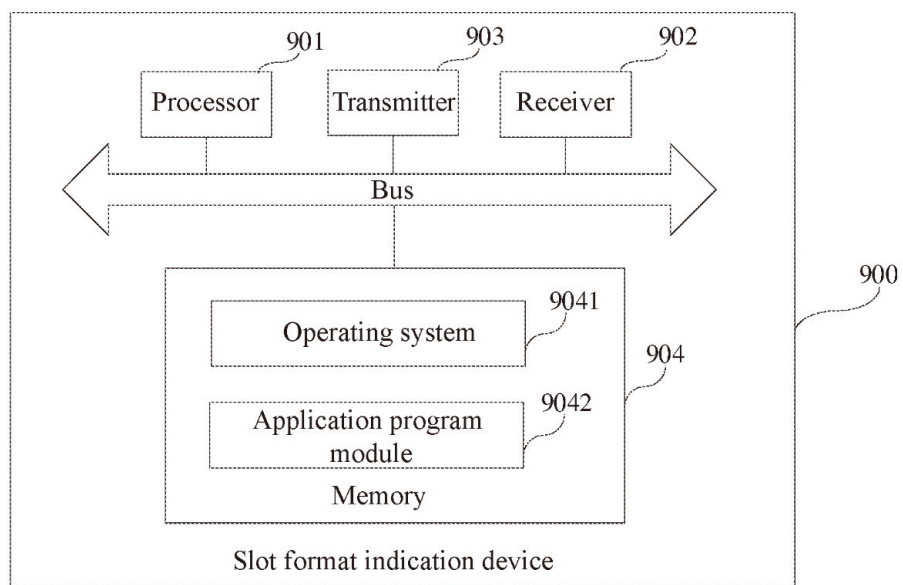


FIG. 9

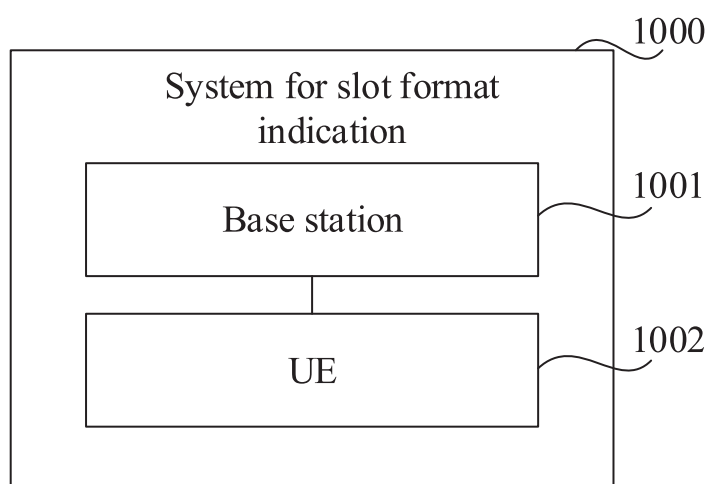


FIG. 10