



(51) International Patent Classification:

G01L 5/10 (2006.01) **G01M 5/00** (2006.01)
G01M 11/08 (2006.01) **G01L 1/24** (2006.01)

(21) International Application Number:

PCT/NL2011/050709

(22) International Filing Date:

17 October 2011 (17.10.2011)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1038312 16 October 2010 (16.10.2010) NL

(71) Applicant (for all designated States except US): **STINIS BEHEER B.V.** [NL/NL]; Dorpsstraat 130, NL-2931 AG Krimpen Aan De Lek (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **STINIS, Cornelis** [NL/NL]; Bouwvereniging 4, NL-2931 AB Krimpen Aan De Lek (NL).

(74) Agent: **BARTELD, Erik**; Sweelinckplein 1, NL-2517 GK The Hague (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD AND DEVICE FOR DETECTING CRACK FORMATION IN A HOISTING MEMBER

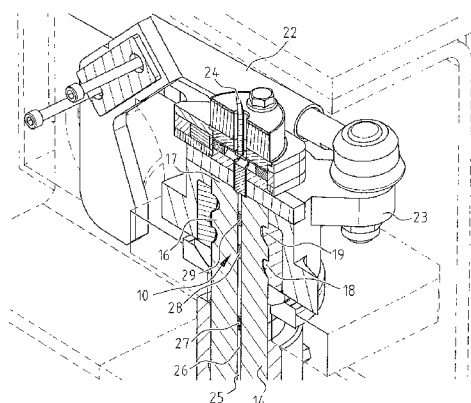


FIG. 3

(57) Abstract: The invention relates to a method for detecting crack formation in a hoisting member, comprising the steps of measuring a stress under load at two points of the hoisting member, comparing the measured stresses and generating a warning signal when the measured stresses differ too much from each other. The invention also relates to a device for detecting crack formation in a hoisting member, comprising means arranged at two points of the hoisting member for measuring a stress under load, means connected to the measuring means for comparing the measured stresses, and means connected to the comparing means for generating a warning signal when the measured stresses differ too much from each other. Finally, the invention relates to a hoisting frame, comprising a number of hoisting members which are mounted thereon close to its corners, and crack detection devices connected thereto.

