




[図1]

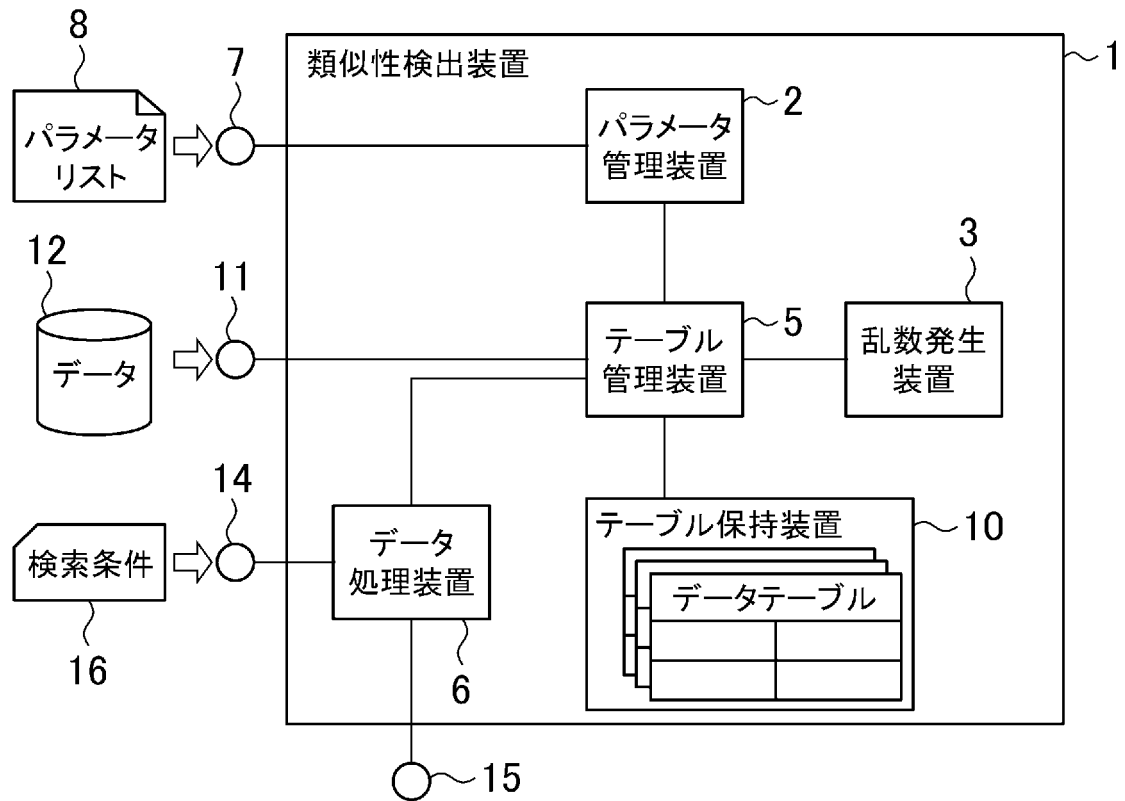


[図2]

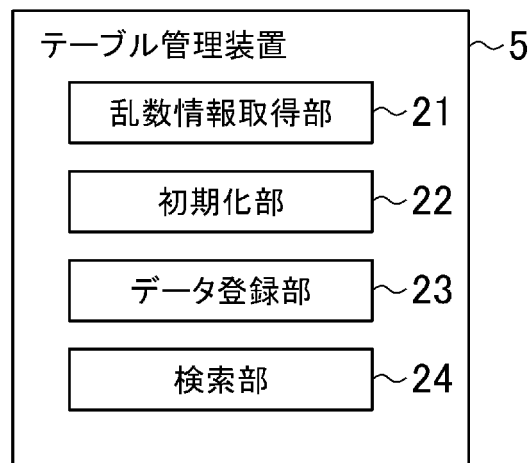

[図3]

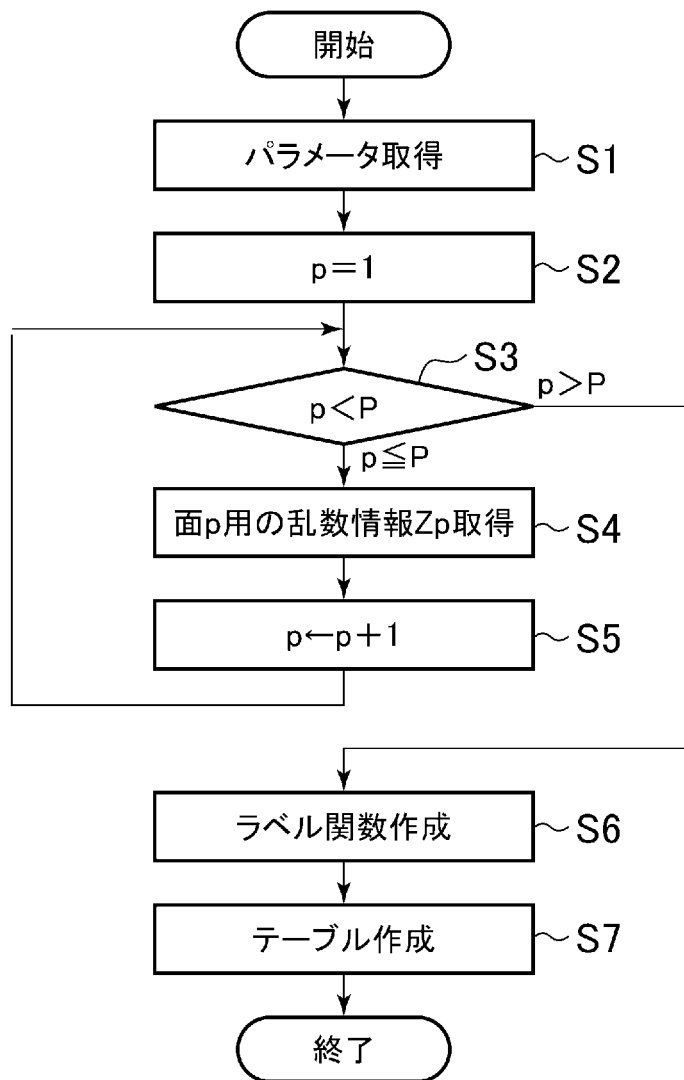

[図4]

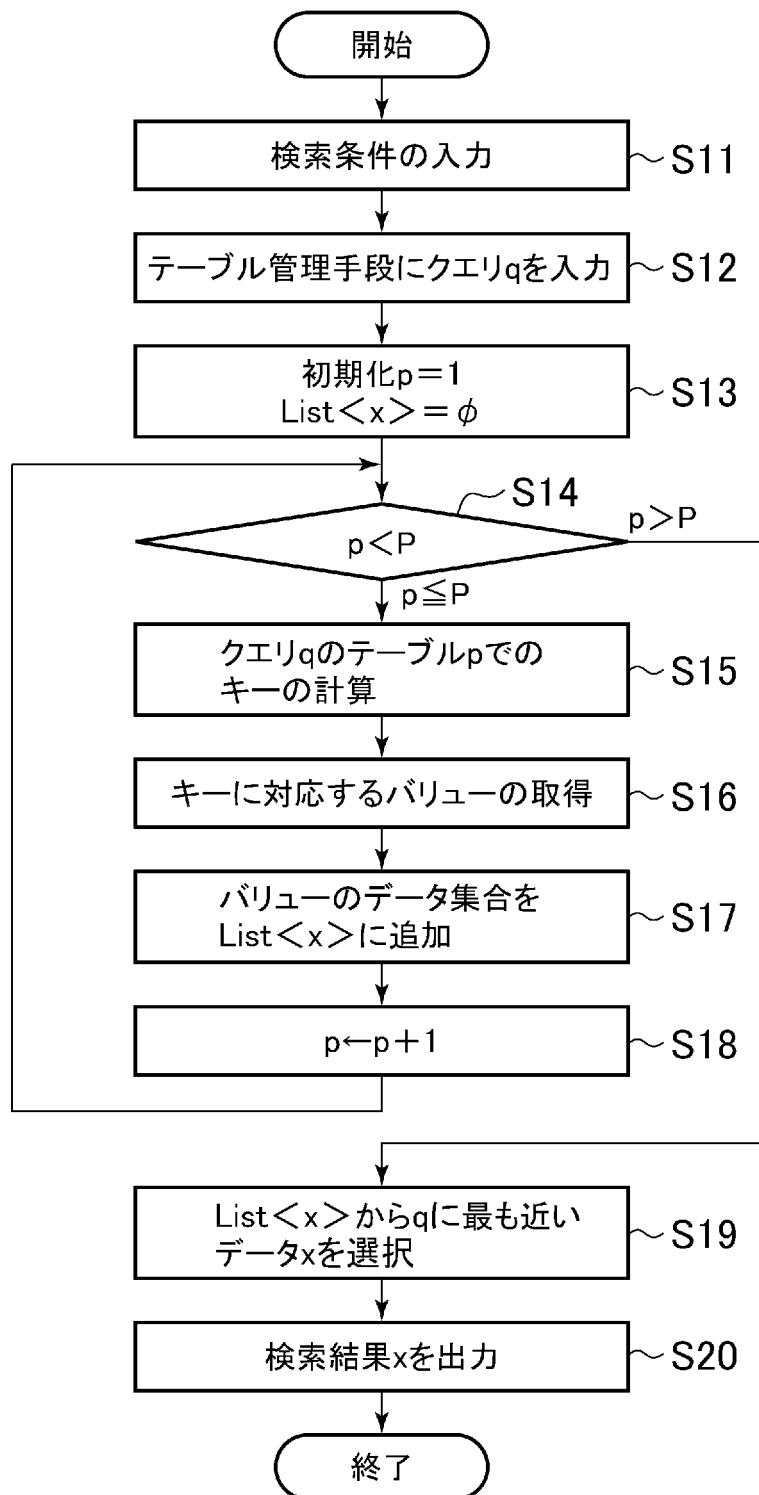


[図5]

35

36	37	38
指向パラメータ	方向 v	強度 σ
u_1	$(1/\sqrt{2}, 1/\sqrt{2})$	2
u_2	$(-1/\sqrt{2}, 1/\sqrt{2})$	1

[図6]



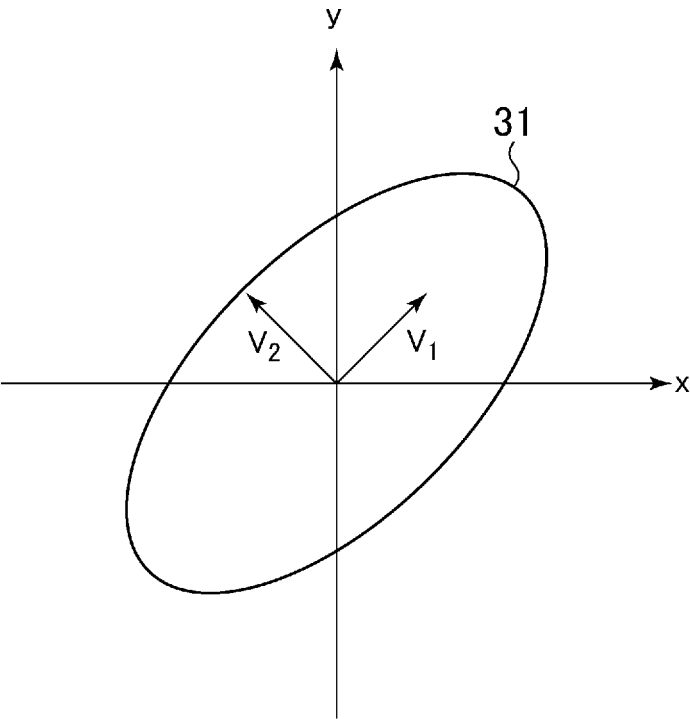


[図7]


41

		(σ_x, σ_y)	
		(1, 3)	(3, 1)
p	0	U_1	U_5
	1	U_2	U_6
	2	U_3	U_7
	3	U_4	U_8


[図8]

	52	51
U_1		
U_2		
$\vdots$	$\vdots$	
U_8		


[図9]

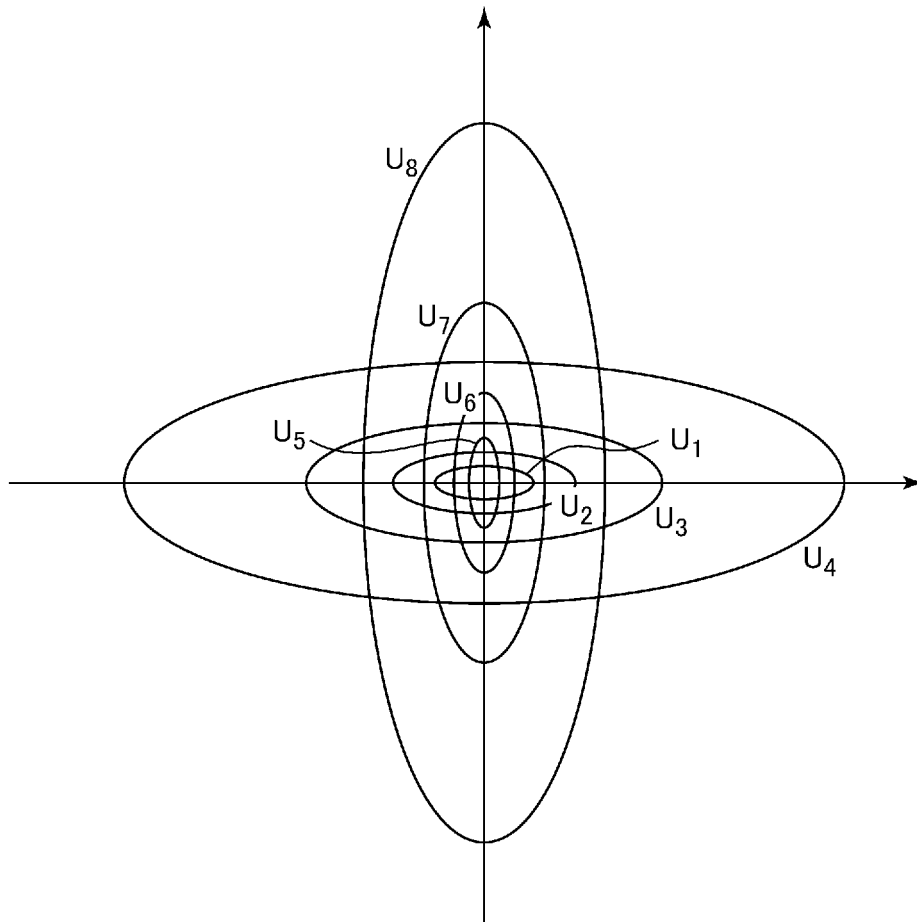


[図10]

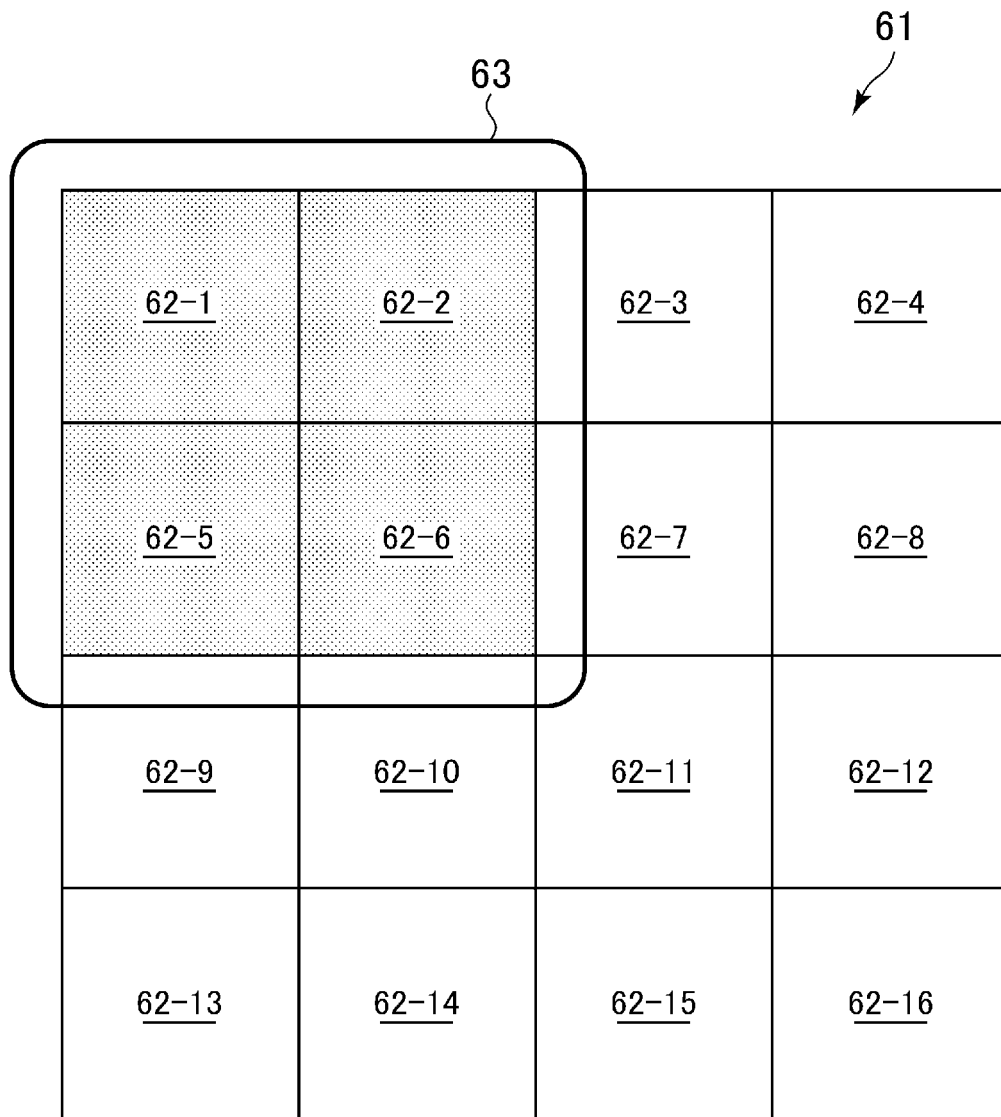


[図11]

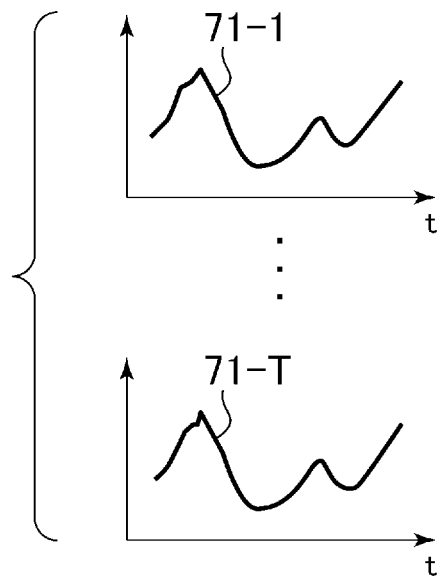


[図12]

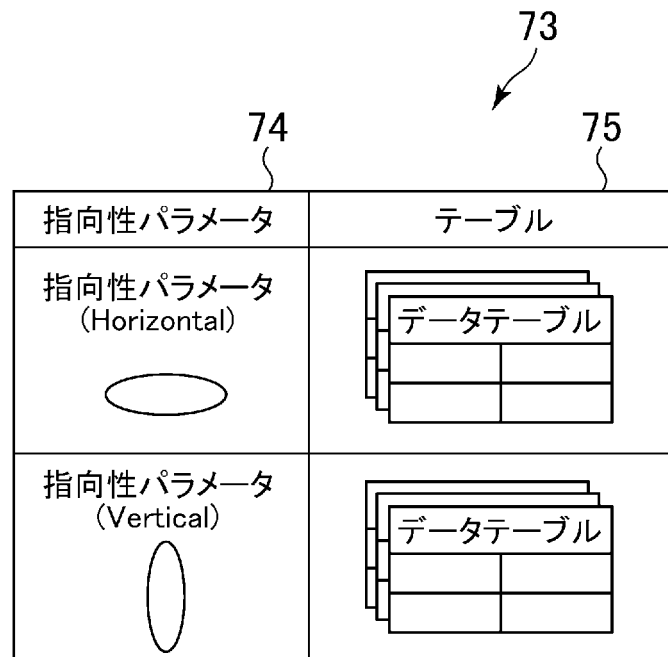


[図13]

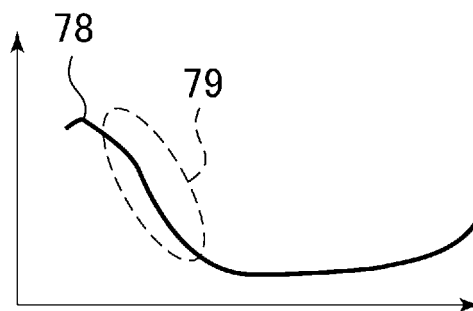


[図14]

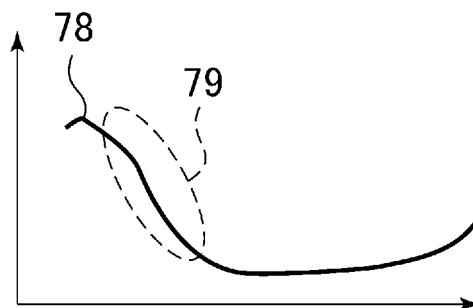


[図15]

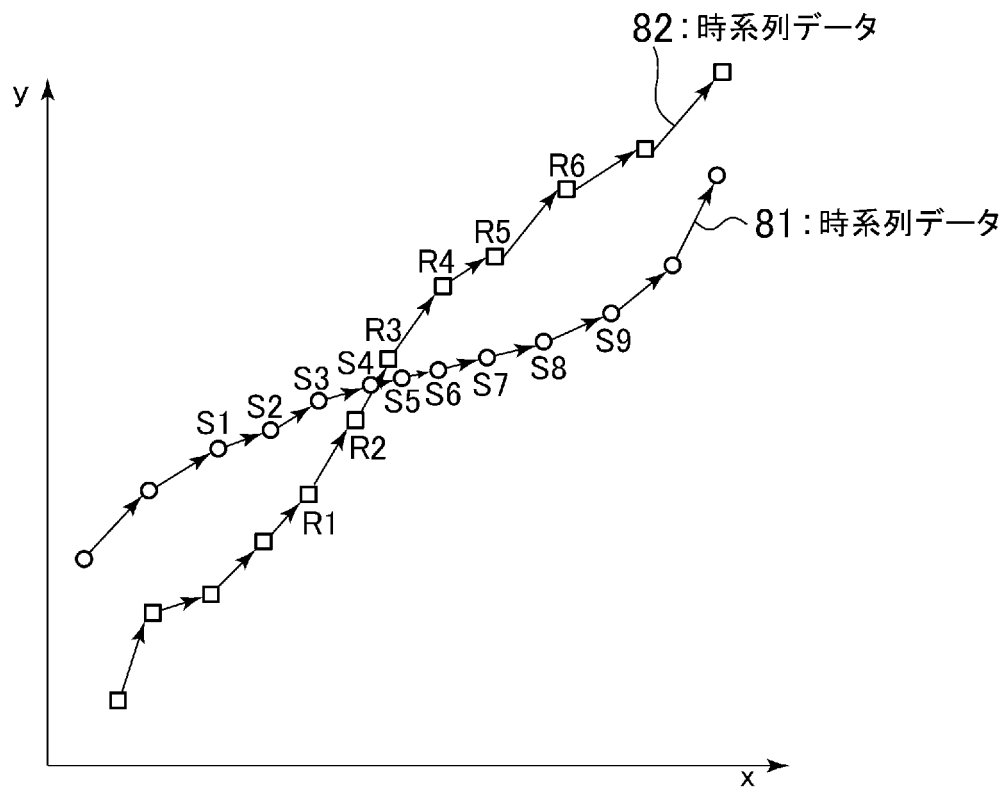


[図16]

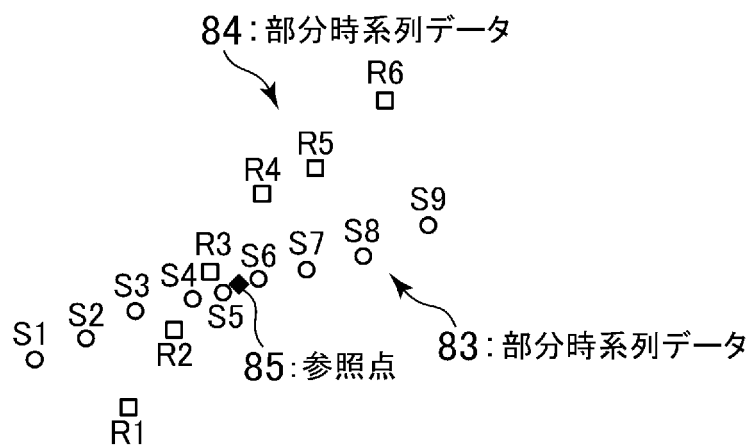


[図17]

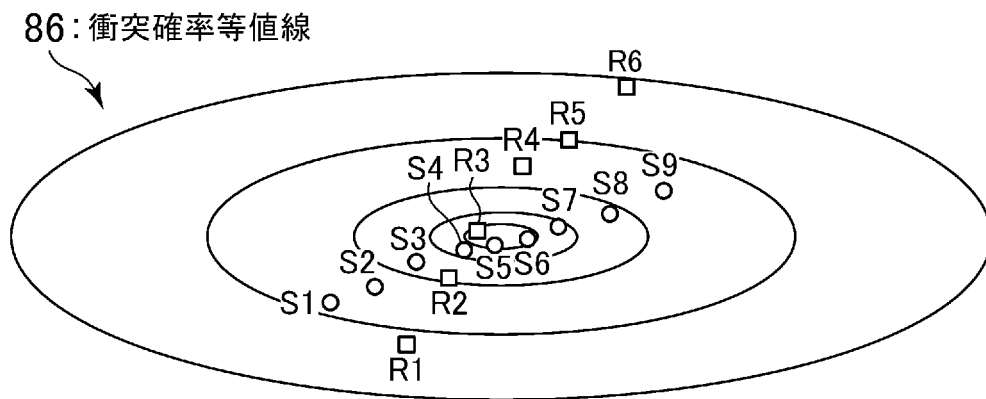


[図18]

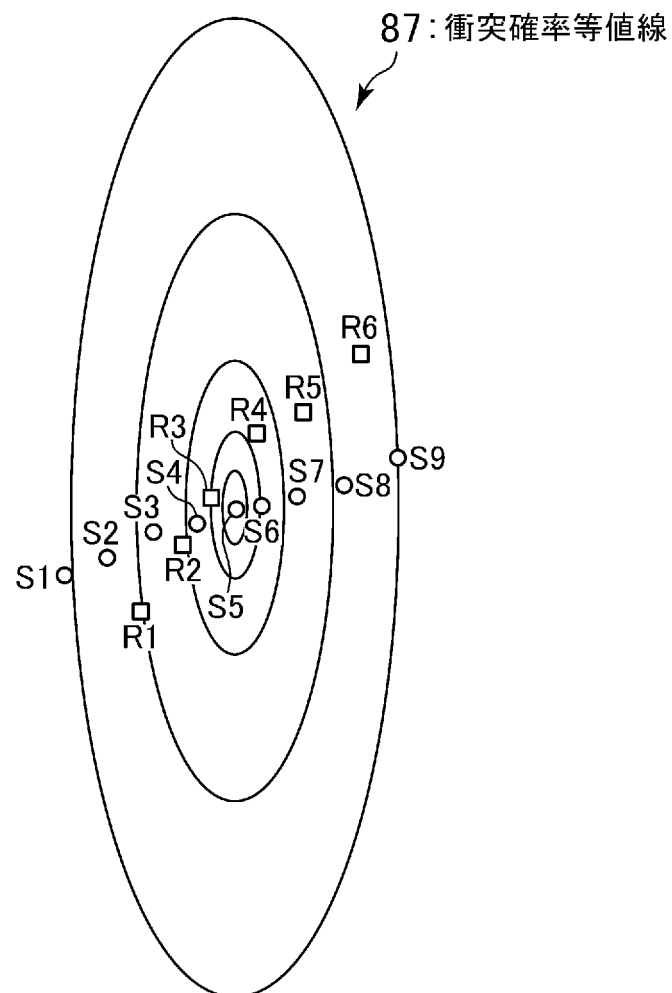


[図19]

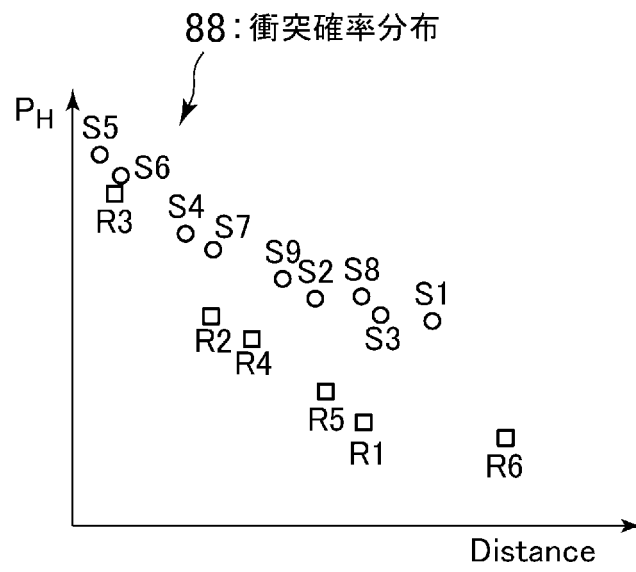


[図20]

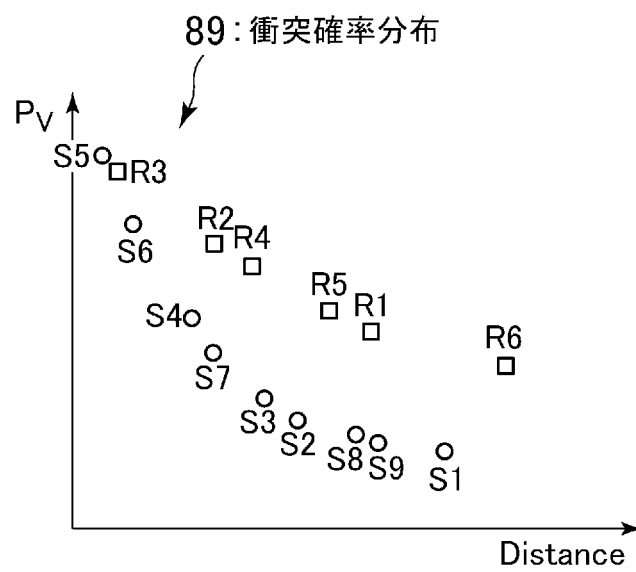

[図21]

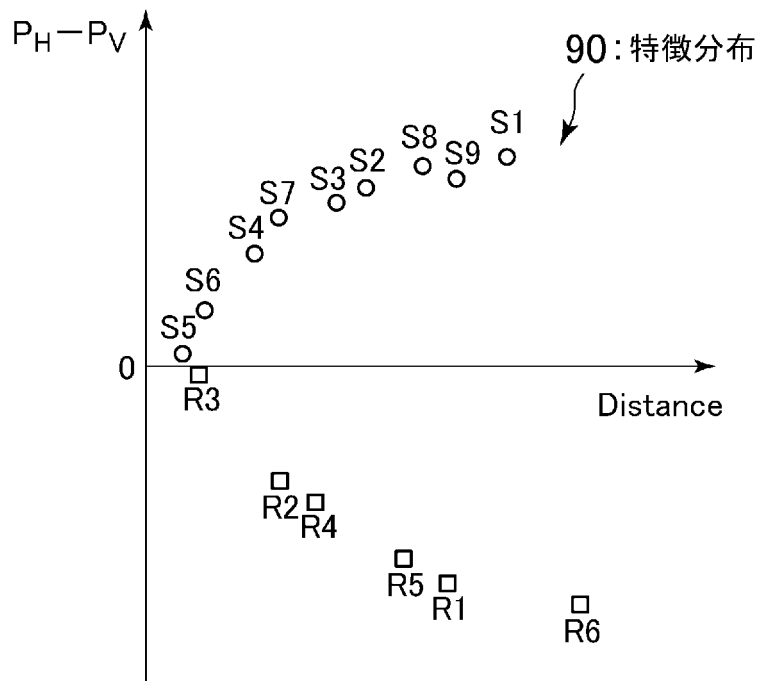

[図22]

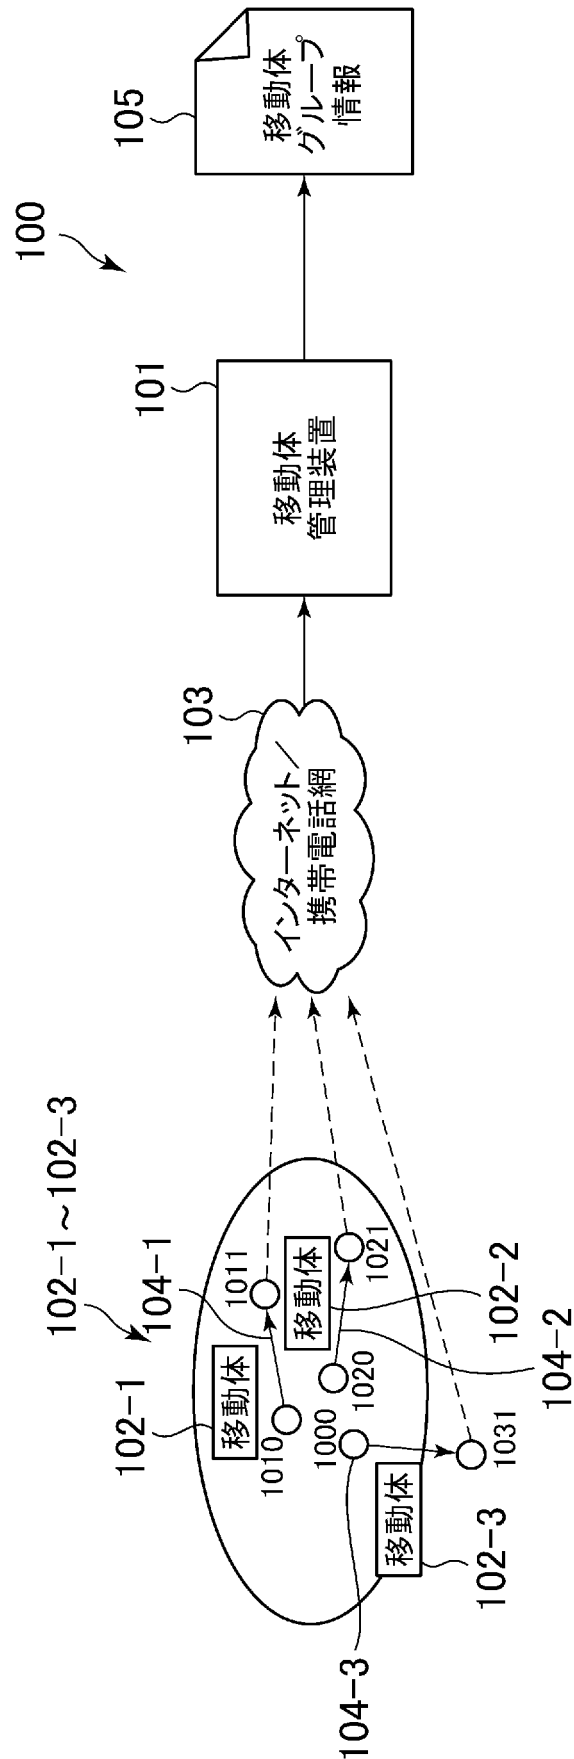

[図23]

