

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
23 June 2022 (23.06.2022)



(10) International Publication Number
WO 2022/129891 A1

(51) International Patent Classification:

H02G 9/02 (2006.01) *G02B 6/54* (2006.01)
H02G 1/10 (2006.01) *F16L 3/26* (2006.01)
H02G 9/12 (2006.01) *F16L 5/00* (2006.01)
G02B 6/50 (2006.01)

(72) Inventor: **GILL, Aneel**; c/o Balmoral Comtec Limited,
Balmoral Park, Wellington Road, Aberdeen Aberdeenshire
AB12 3GY (GB).

(74) Agent: **MURGITROYD & COMPANY**; Murgitroyd
House, 165-169 Scotland Street, Glasgow Central Scotland
G5 8PL (GB).

(21) International Application Number:

PCT/GB2021/053289

(22) International Filing Date:

14 December 2021 (14.12.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2019850.3 16 December 2020 (16.12.2020) GB

(71) Applicant: **BALMORAL COMTEC LIMITED**

[GB/GB]; Balmoral Park, Wellington Road, Loirston, Ab-
erdeen AB12 3GY (GB).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,

(54) Title: MARINE POWER CONDUIT INTERFACE ASSEMBLY

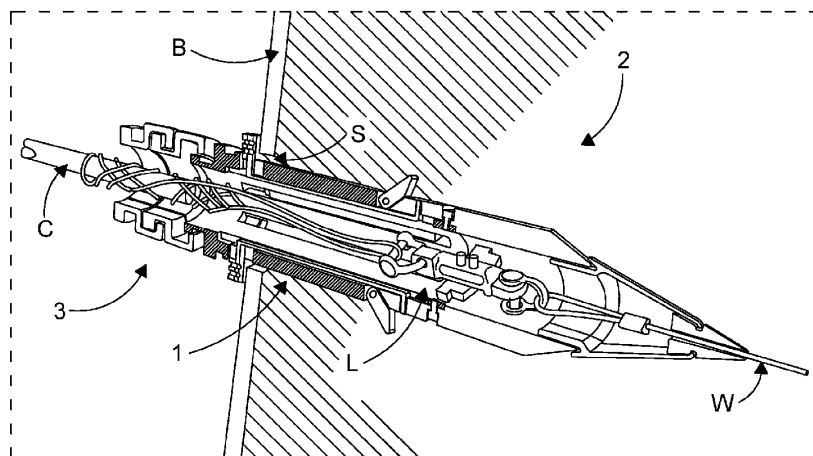


FIG. 14

(57) Abstract: A marine power conduit interface assembly has a slide slidable within a housing. Sliding of the slide in the housing locks the assembly in a socket of an energy generator. The slide has a leg extending axially within a groove formed in the inner surface of the bore of the housing, connected to a ring with a flange which extends radially outwards from an outer surface of the housing. The ring is connected to the leg by a radially inwardly extending finger passing through a slot in the housing. The lock can be activated and deactivated by sliding of the slide in the housing.

[Continued on next page]

WO 2022/129891 A1

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*