

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 March 2009 (05.03.2009)

PCT

(10) International Publication Number
WO 2009/029147 A1

(51) International Patent Classification:
E21B 3/04 (2006.01)

(21) International Application Number:
PCT/US2008/008371

(22) International Filing Date: 8 July 2008 (08.07.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/966,280 27 August 2007 (27.08.2007) US
12/069,130 7 February 2008 (07.02.2008) US

(71) Applicant and

(72) Inventor: WILLIAMS, John, R. [US/US]; 4500
Williams Drive, #212-404, Georgetown, TX 78628 (US).

(74) Agent: SIMMONS, David, O.; 7637 Parkview Circle,
Austin, TX 78731 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv))

Published:

— with international search report
— with amended claims

(54) Title: SPRING LOAD SEAL ASSEMBLY AND WELL DRILLING EQUIPMENT COMPRISING SAME

FIG. 7

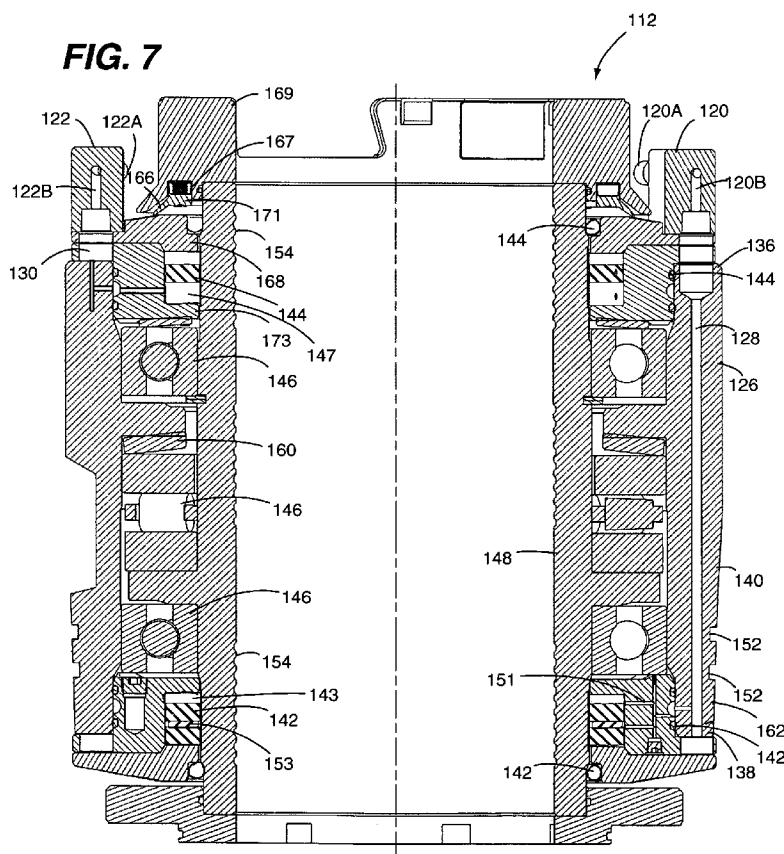

(57) Abstract: A top drive apparatus for a well drilling head comprises a top drive structure, a seal body and a plurality of resilient members. The top drive structure is configured for being fixedly attached to an upper end portion of a bearing assembly and having a seal-carrying portion. The seal body has a mounting portion and a wiper portion extending from the mounting portion. The mounting portion is slideably disposed within a groove of the seal-carrying portion of the top drive structure. The plurality of resilient members are disposed within the groove between the mounting portion of the seal body and the top drive structure such that the entire seal body is resiliently displaceable with respect to the top drive structure.