


ABSTRACT

A liquid crystal sealant comprising an epoxy resin represented by the following formula (1):

[Formula 1]

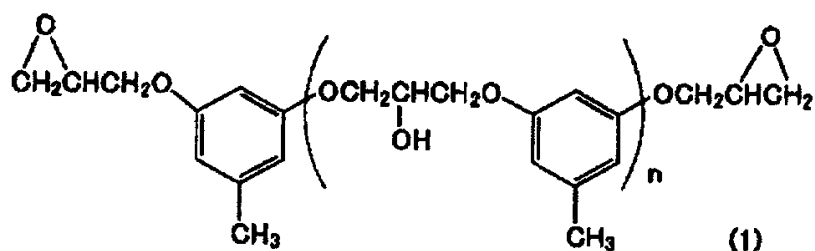

(in the formula, n denotes an average polymerization degree and is a positive number of 0-5) as a resin component, a curing agent, a curing accelerator and an inorganic filler is excellent in screen printability as a liquid crystal sealant in making a liquid crystal display device and can provide excellent reliability in moisture resistance for the liquid crystal display device obtained).