



- (51) **International Patent Classification:**
G06F 5/06 (2006.01)
- (21) **International Application Number:**
PCT/US2013/078323
- (22) **International Filing Date:**
30 December 2013 (30.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** SCHNEIDER ELECTRIC IT CORPORATION [US/US]; 132 Fairgrounds Road, West Kingston, RI 02892 (US).
- (72) **Inventor:** ANDREWS, Bibin; Puliampallil House, Maalam P.O., Manarcadu, Kottayam, Kerala 686019 (IN).
- (74) **Agent:** SULLIVAN, Thomas, M.; Lando & Anastasi LLP, Riverfront Office Park, One Main Street, Suite 1100, Cambridge, MA 02142 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

[Continued on next page]

- (54) **Title:** SYSTEM AND METHOD FOR AUTOMATICALLY SELECTING BAUD RATE IN A CAN NETWORK

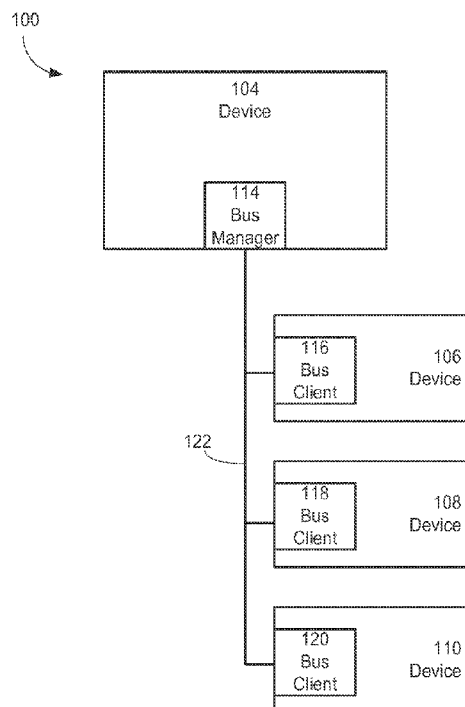


FIG. 1

(57) **Abstract:** According to various aspects and embodiments, a device is provided. The device includes a memory, a Controller Area Network (CAN) controller coupled to a CAN bus, at least one processor coupled to the memory and the CAN controller. The at least one processor is configured to set the CAN controller to a first baud rate, determine a second baud rate, and send, in response to determining the second baud rate, a baud rate change request via the CAN bus, wherein the baud rate change request includes at least an identifier of the second baud rate.



Published:

— *with international search report (Art. 21(3))*