



(51) International Patent Classification:

G05D 11/13 (2006.01) G05B 21/00 (2006.01)
G05D 11/02 (2006.01) B01F 5/00 (2006.01)

(21) International Application Number:

PCT/US2014/035024

(22) International Filing Date:

22 April 2014 (22.04.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/814,647 22 April 2013 (22.04.2013) US

(71) Applicant: ASAHI KASEI BIOPROCESS, INC.
[US/US]; 1855 Elmdale Avenue, Glenview, IL 60026 (US).

(72) Inventor: BRANDT, Michael; 1855 Elmdale Avenue, Glenview, IL 60026 (US).

(74) Agents: JOHNSTON, R. Blake et al.; DLA Piper LLP US, P.O. Box 2758, Reston, VA 20195 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MULTI-STAGE ACCURATE BLENDING SYSTEM AND METHOD

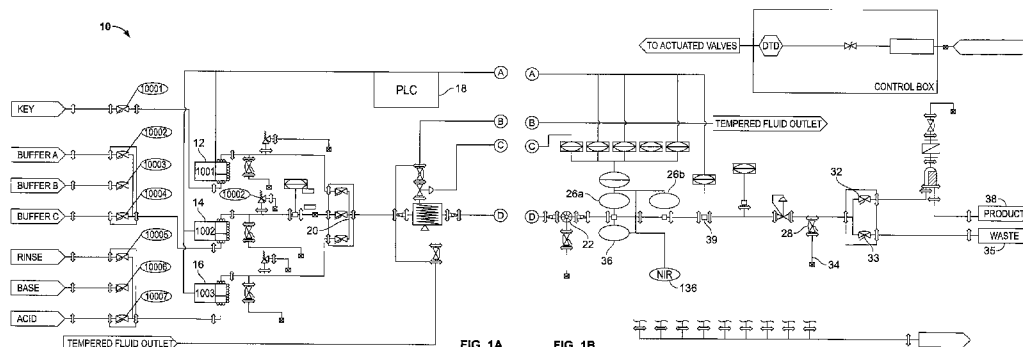

(57) Abstract: An accurate blending system for blending first and second liquid components includes a first feed adapted to communicate with a supply of the first component and a second feed adapted to communicate with a supply of the second component. A shear blender is in communication with the first and second feeds. A first sensor is in communication with an outlet of the shear blender. A controller is in communication with the first sensor so that a first characteristic of a solution exiting the shear blender can be detected. The controller is also in communication with the second feed so that delivery of the second component to the shear blender can be controlled based upon the detected first characteristic.