

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(10) 国际公布号

WO 2022/233066 A1

(43) 国际公布日
2022 年 11 月 10 日 (10.11.2022) WIPO | PCT

- (51) 国际专利分类号:
H04W 76/28 (2018.01) *H04W 76/23* (2018.01)
- (21) 国际申请号: PCT/CN2021/092241
- (22) 国际申请日: 2021 年 5 月 7 日 (07.05.2021)
- (25) 申请语言: 中文
- (26) 公布语言: 中文
- (71) 申请人: 北京小米移动软件有限公司 (BEIJING XIAOMI MOBILE SOFTWARE CO., LTD.) [CN/CN]; 中国北京市海淀区西二旗中路 33 号院 6 号楼 8 层 018 号, Beijing 100085 (CN)。
- (72) 发明人: 杨星 (YANG, Xing); 中国北京市海淀区西二旗中路 33 号院 6 号楼 8 层 018 号, Beijing 100085 (CN)。
- (74) 代理人: 北京法胜知识产权代理有限公司 (FASHENG INTELLECTUAL PROPERTY COMPANY, LTD.); 中国北京市海淀区北洼路 45 号 1 号楼 2 层 202 室, Beijing 100142 (CN)。
- (81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。
- (84) 指定国 (除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,

(54) Title: METHOD AND APPARATUS FOR DETERMINING ACTIVATION STATE OF TERMINAL

(54) 发明名称: 一种确定终端激活状态的方法及装置

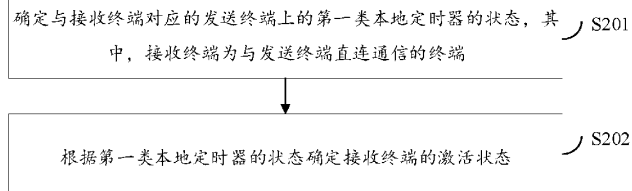


图 2

- S201 Determine the state of a first-type local timer on a transmitting terminal corresponding to a receiving terminal, wherein the receiving terminal is a terminal in direct communication with the transmitting terminal
- S202 Determine the activation state of the receiving terminal according to the state of the first-type local timer

(57) Abstract: Embodiments of the present application disclose a method and apparatus for determining the activation state of a terminal, which can be applied to a communication system. The method comprises: determining the state of a first-type local timer on a transmitting terminal corresponding to a receiving terminal, wherein the receiving terminal is a terminal in direct communication with the transmitting terminal; and determining the activation state of the receiving terminal according to the state of the first-type local timer. By means of implementing the embodiments of the present application, since the activation state of peer-to-peer devices in direct communication can be determined, determination inconsistencies in the activation state of two devices in direct communication can be avoided, thereby reducing data transmission errors and reducing power loss.

(57) 摘要: 本申请实施例公开了一种确定终端激活状态的方法及装置, 可以应用于通信系统中, 该方法包括: 确定与接收终端对应的发送终端上的第一类本地定时器的状态, 其中, 接收终端为与发送终端直连通信的终端; 根据第一类本地定时器的状态确定接收终端的激活状态。通过实施本申请实施例, 由于可以确定直连通信的对端设备的激活状态, 从而可以避免进行直连通信的两个设备对激活状态的判断不一致, 从而减少数据传输误差, 降低电量损耗。

[见续页]

WO 2022/233066 A1

NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：

- 包括国际检索报告 (条约第21条(3))。