

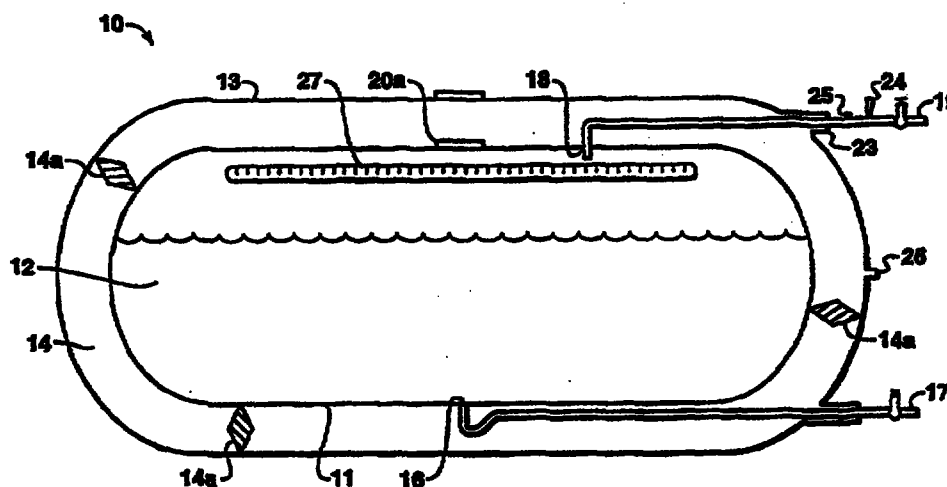


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: C22C 38/08, F25B 19/00 F25D 23/00	A3	(11) International Publication Number: WO 98/59195 (43) International Publication Date: 30 December 1998 (30.12.98)
(21) International Application Number: PCT/US98/12744 (22) International Filing Date: 18 June 1998 (18.06.98) (30) Priority Data: 60/050,280 20 June 1997 (20.06.97) US 60/053,966 28 July 1997 (28.07.97) US 60/068,110 19 December 1997 (19.12.97) US (71) Applicant: EXXON PRODUCTION RESEARCH COMPANY [US/US]; 3120 Buffalo Speedway, P.O. Box 2189, Houston, TX 77252-2189 (US). (72) Inventors: BOWEN, Ronald, R.; 37602 Pinwood Court, Magnolia, TX 77355 (US). MINTA, Moses; 39 Sterling Street, Sugar Land, TX 77479 (US). (74) Agents: CASAMASSIMA, Salvatore, J. et al.; Exxon Pro- duction Research Company, P.O. Box 2189, Houston, TX 77252-2189 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> (88) Date of publication of the international search report: 18 March 1999 (18.03.99)	

(54) Title: SYSTEMS FOR VEHICULAR, LAND-BASED DISTRIBUTION OF LIQUEFIED NATURAL GAS**(57) Abstract**

Systems are provided for vehicular, land-based distribution of pressurized liquefied natural gas at a pressure of about 1035 kPa (150 psia) to about 7590 kPa (1100 psia) and at a temperature of about -123°C (-190°F) to about -62°C (-80°F) environ. The systems include at least one container that is constructed from an ultra-high strength, low alloy steel containing less than 9 wt.% nickel and having a tensile strength greater than 830 MPa (120 ksi) and a DBTT lower than about -73°C (-100°F).