

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2008 (13.11.2008)

PCT

(10) International Publication Number
WO 2008/134791 A1

(51) International Patent Classification:
H01R 4/24 (2006.01)

(21) International Application Number:
PCT/AU2008/000470

(22) International Filing Date: 2 April 2008 (02.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2007902395 4 May 2007 (04.05.2007) AU

(71) Applicant (for all designated States except US): **ADC GmbH** [DE/DE]; Beeskowdamm 3-11, 14167 Berlin (DE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DENNES, Wayne** [AU/AU]; 30 Malison Street, Wyoming, New South Wales 2250 (AU).


(74) Agents: **CLARK, Ross, James** et al.; Davies Collison Cave, 1 Nicholson Street, Melbourne, Victoria 3000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

(54) Title: POWER OUTLET

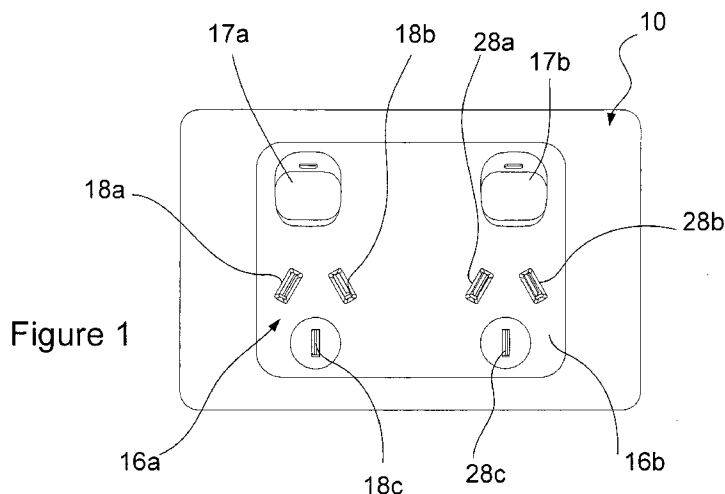

(57) Abstract: A power outlet for effecting an electrical connection between an electric device and insulated conductors of an electric power cable, including a socket having apertures including electrically conductive socket contacts seated therein for effecting electrical connection to corresponding electrically conductive contacts of a plug of the electric device; a plurality of primary channels shaped to at least partially receive, and seat therein, respective lengthwise sections of the insulated conductors of the power cable; a plurality of insulation displacement contacts for making separate electrical connections to said insulated conductors, when received in said primary channels, under relative movement between the insulation displacement contacts and the insulated conductors; a connector, relatively movable with respect to the primary channels, for effecting said relative movement, wherein the insulation displacement contacts are electrically coupled to respective ones of said socket contacts, and said primary channels extend transversely to a lengthwise direction of extent of the power outlet.



WO 2008/134791 A1