



(51) International Patent Classification:
G02B 6/42 (2006.01) **H01L 23/10** (2006.01)

(21) International Application Number:
PCT/IB2011/002455

(22) International Filing Date:
5 September 2011 (05.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/IB2010/002792
14 September 2010 (14.09.2010) IB

(71) Applicant (for all designated States except US): FCI
[FR/FR]; 18, Parc Ariane III, 3/5, rue Alfred Kastler,
F-78280 Guyancourt (FR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DROESBEKE, Gert
[BE/BE]; Pallo 15, 2440 Geel (BE).

(74) Agent: REGI, François-Xavier; FCI - IP Department, 18
Parc Ariane III, 3/5, rue Alfred Kastler, F-78284 Guyan-
court CEDEX (FR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: OPTICAL COUPLING DEVICE, OPTICALSYSTEM AND METHODS OF ASSEMBLY

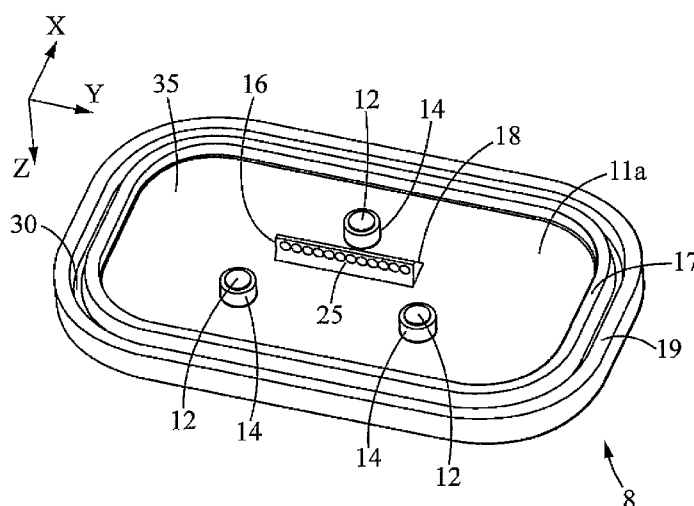


FIG. 2

(57) Abstract: An optical coupling device comprises: a Z-reference part co-operating with a Z- reference of a first optical device, to define the location of a first optical interface of the coupling device along a direction (Z), fixation parts (17, 19), extending at different heights along this direction, adapted to be glued to the first optical device.

