



(51) International Patent Classification:

F41H 3/00 (2006.01) *B60N 2/56* (2006.01)
A47C 7/74 (2006.01) *F25B 21/02* (2006.01)

(21) International Application Number:

PCT/SE2010/050162

(22) International Filing Date:

11 February 2010 (11.02.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0950071-1 11 February 2009 (11.02.2009) SE

(71) Applicant (for all designated States except US): **BAE SYSTEMS HÄGGLUNDS AKTIEBOLAG** [SE/SE]; S-891 82 Örnköldsvik (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SJÖLUND, Peder** [SE/SE]; Karosserivägen 3, S-892 41 Örnköldsvik (SE).

(74) Agent: **ALBIHNS.ZACCO AB**; Valhallavägen 117, P.O. Box 5581, S-114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEVICE FOR THERMAL ADAPTION

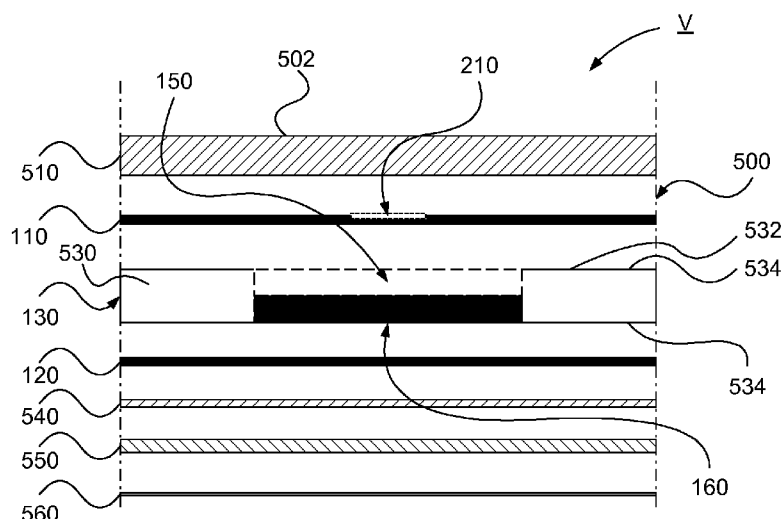


Fig. 5a

(57) Abstract: The invention relates to a device for thermal adaptation, comprising at least one surface element arranged to assume a determined thermal distribution, said surface element comprising a first heat conducting layer, a second heat conducting layer, said first and second heat conducting layers being mutually thermally isolated by means of an intermediate insulation layer, wherein at least one thermoelectric element is arranged to generate a predetermined temperature gradient to a portion of said first layer. The invention also relates to an object such as a craft.