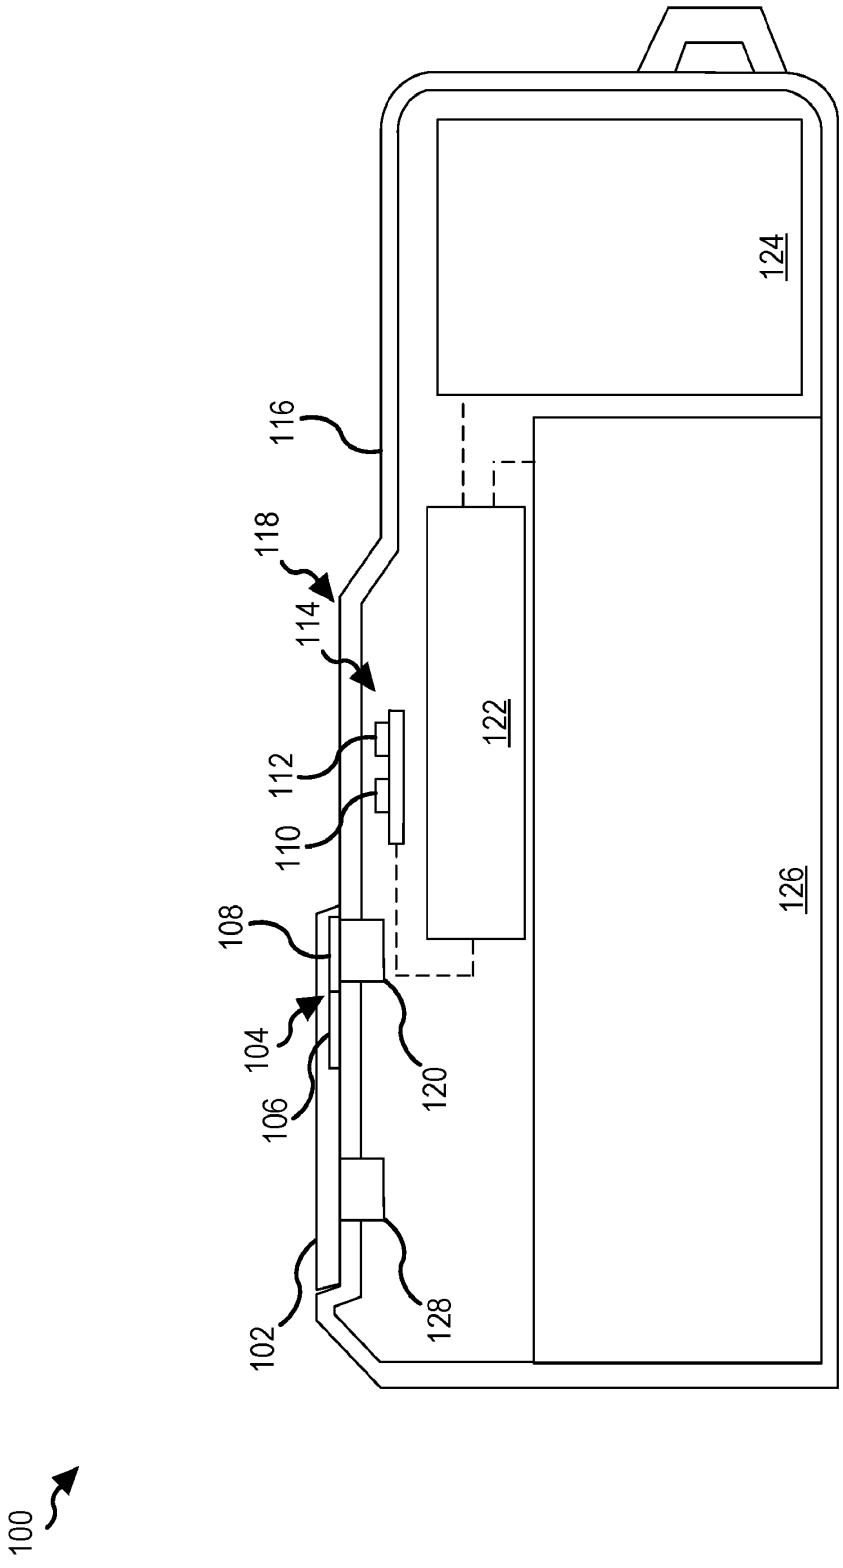


FIG. 1

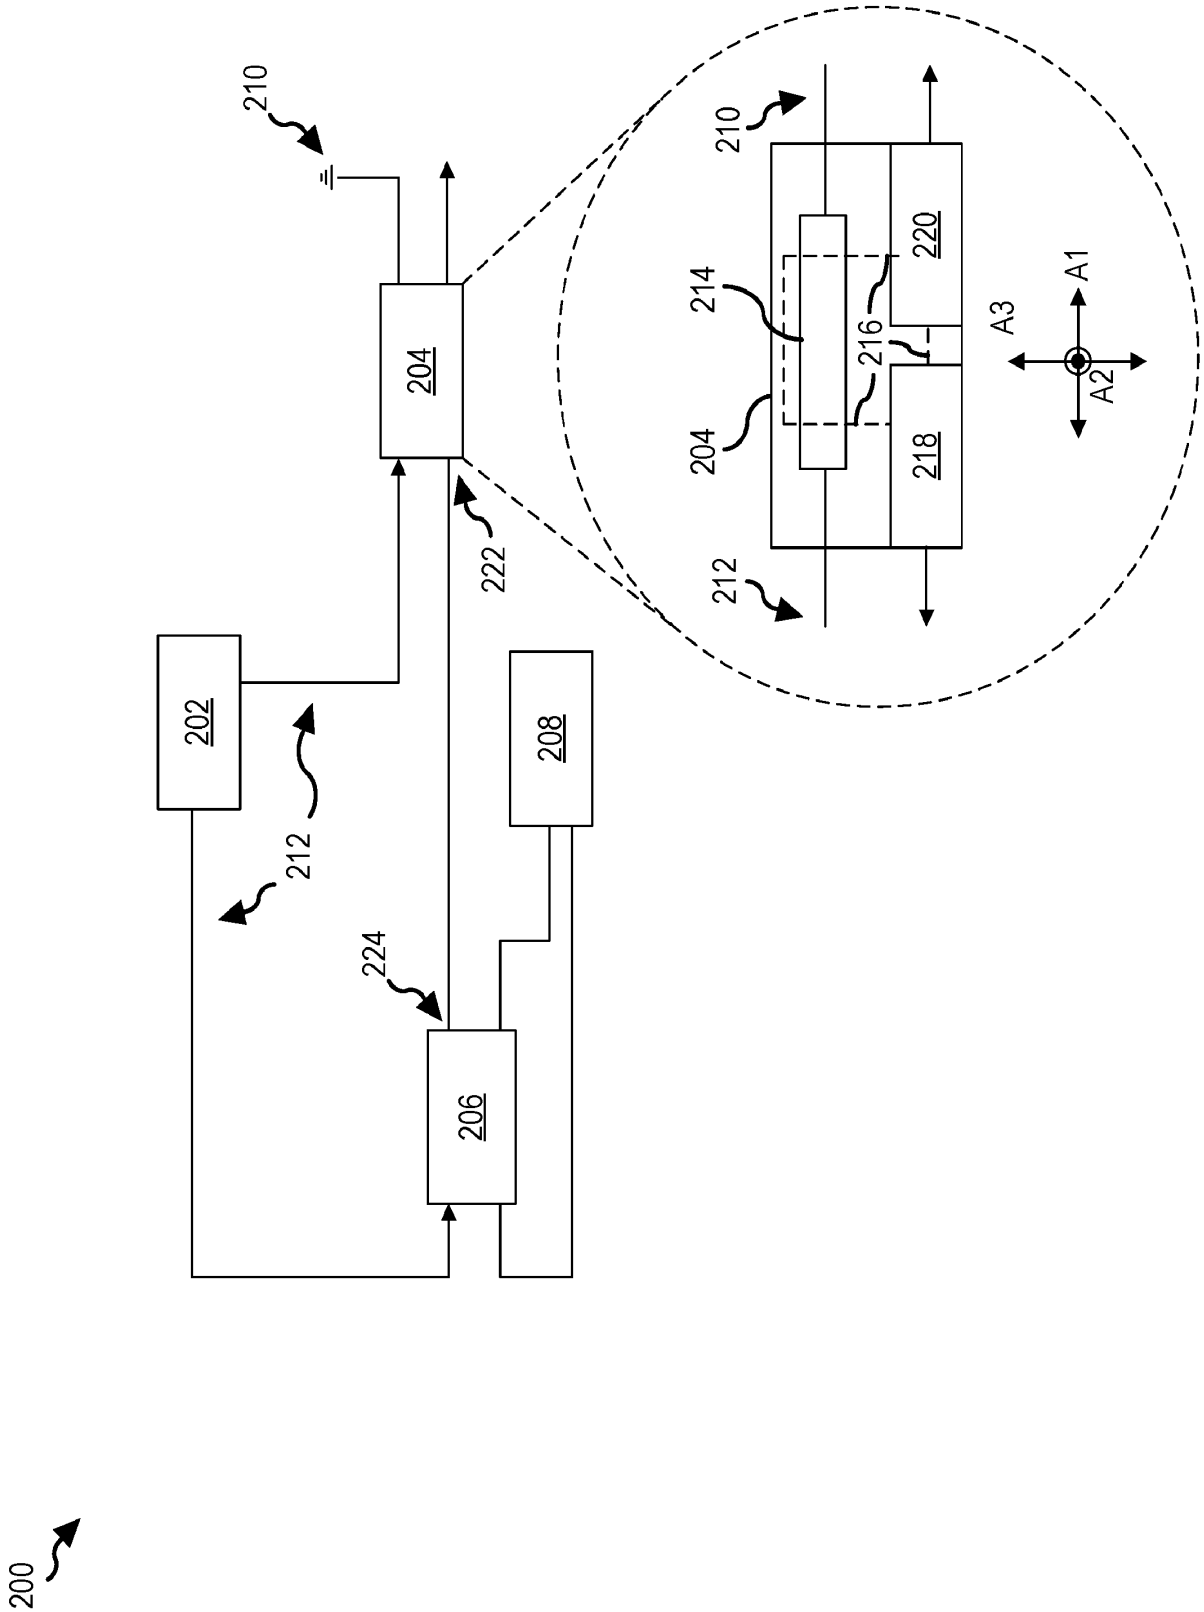

200
210
204
222
202
212
208
224
206
210
214
204
216
220
218
212
A3
A1
A2

FIG. 2

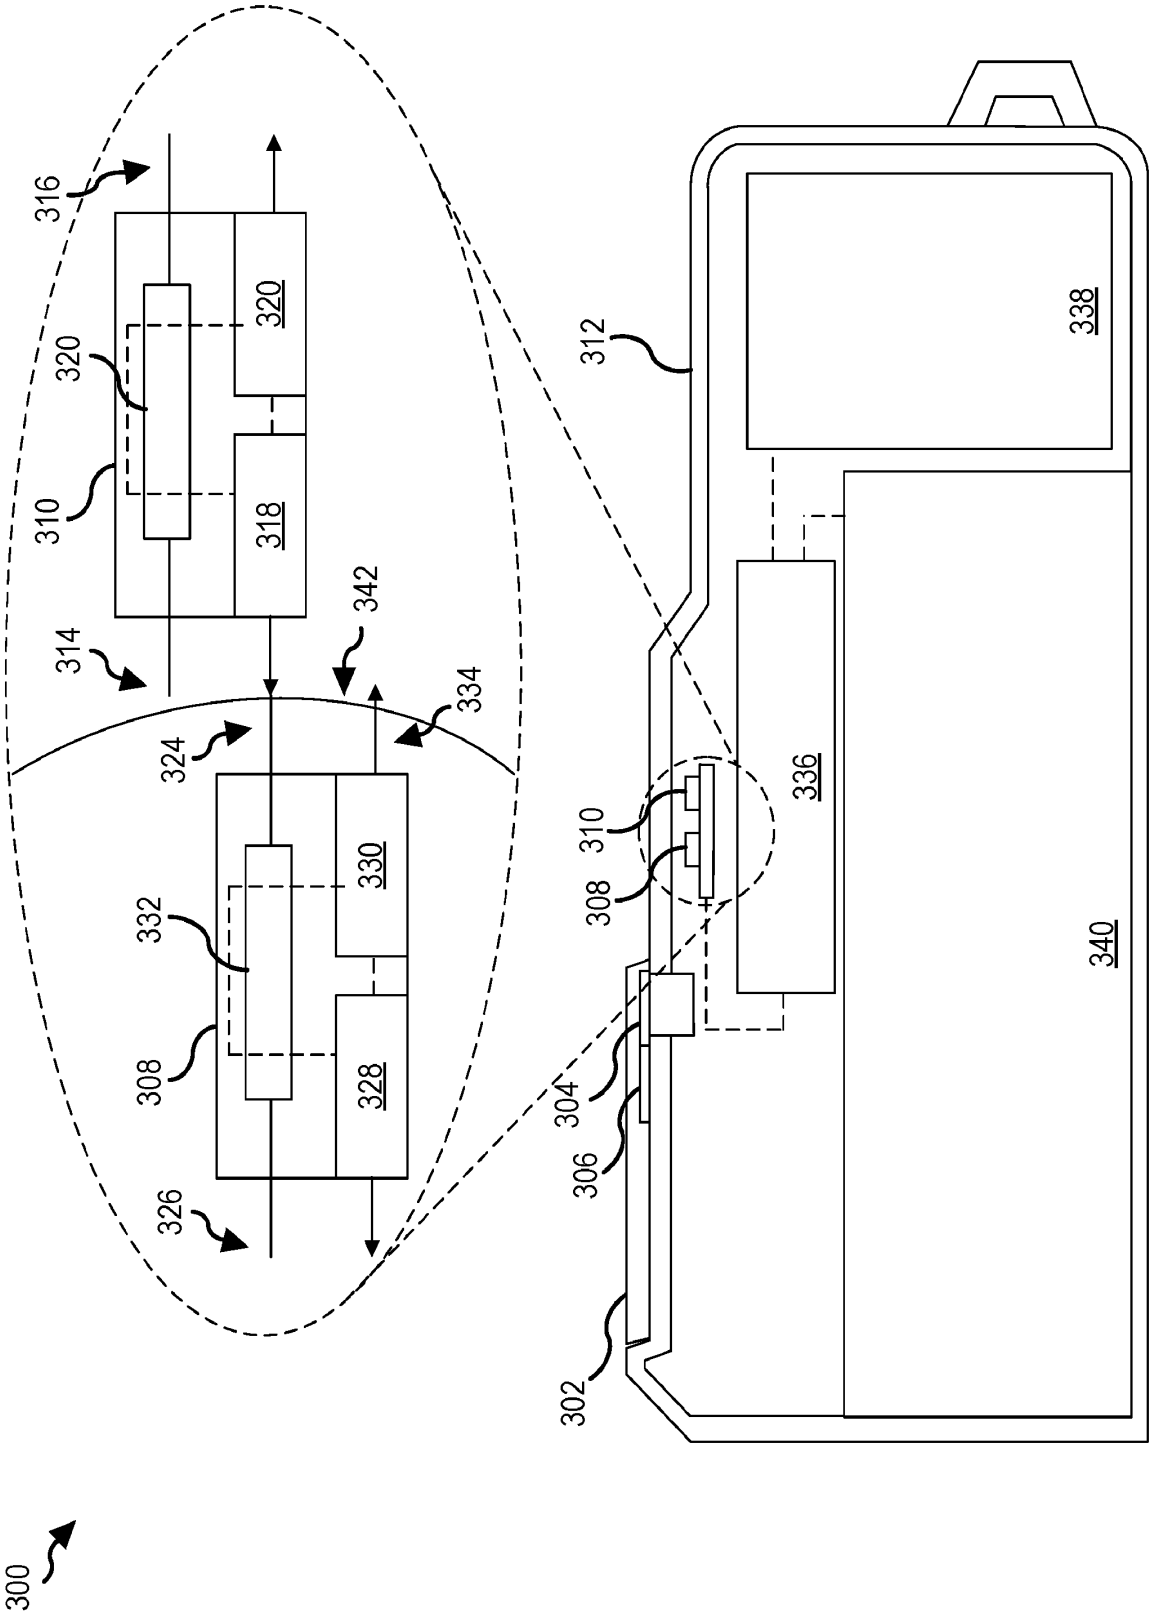

300
302
304
306
308
310
312
314
316
318
320
320
324
326
328
330
332
334
336
338
340
342

FIG. 3A

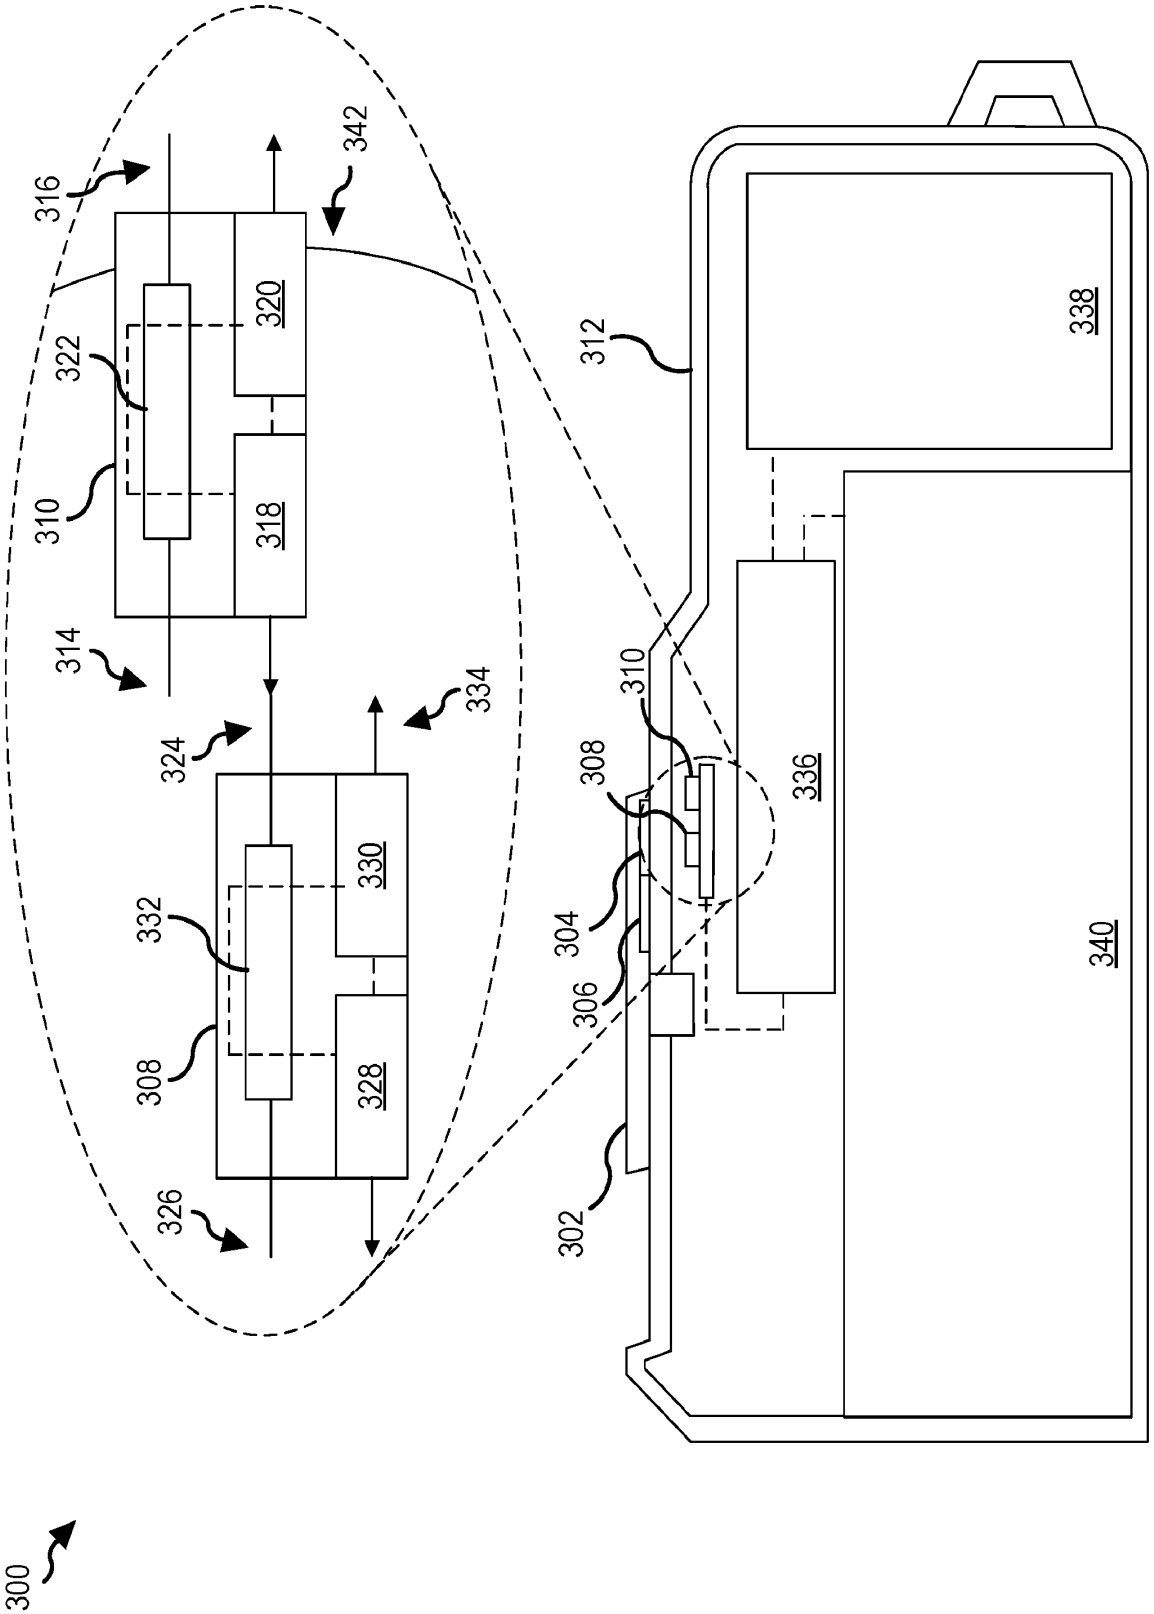

300
302
304
306
308
310
312
314
316
318
320
322
324
326
328
330
332
334
336
338
340
342

FIG. 3B

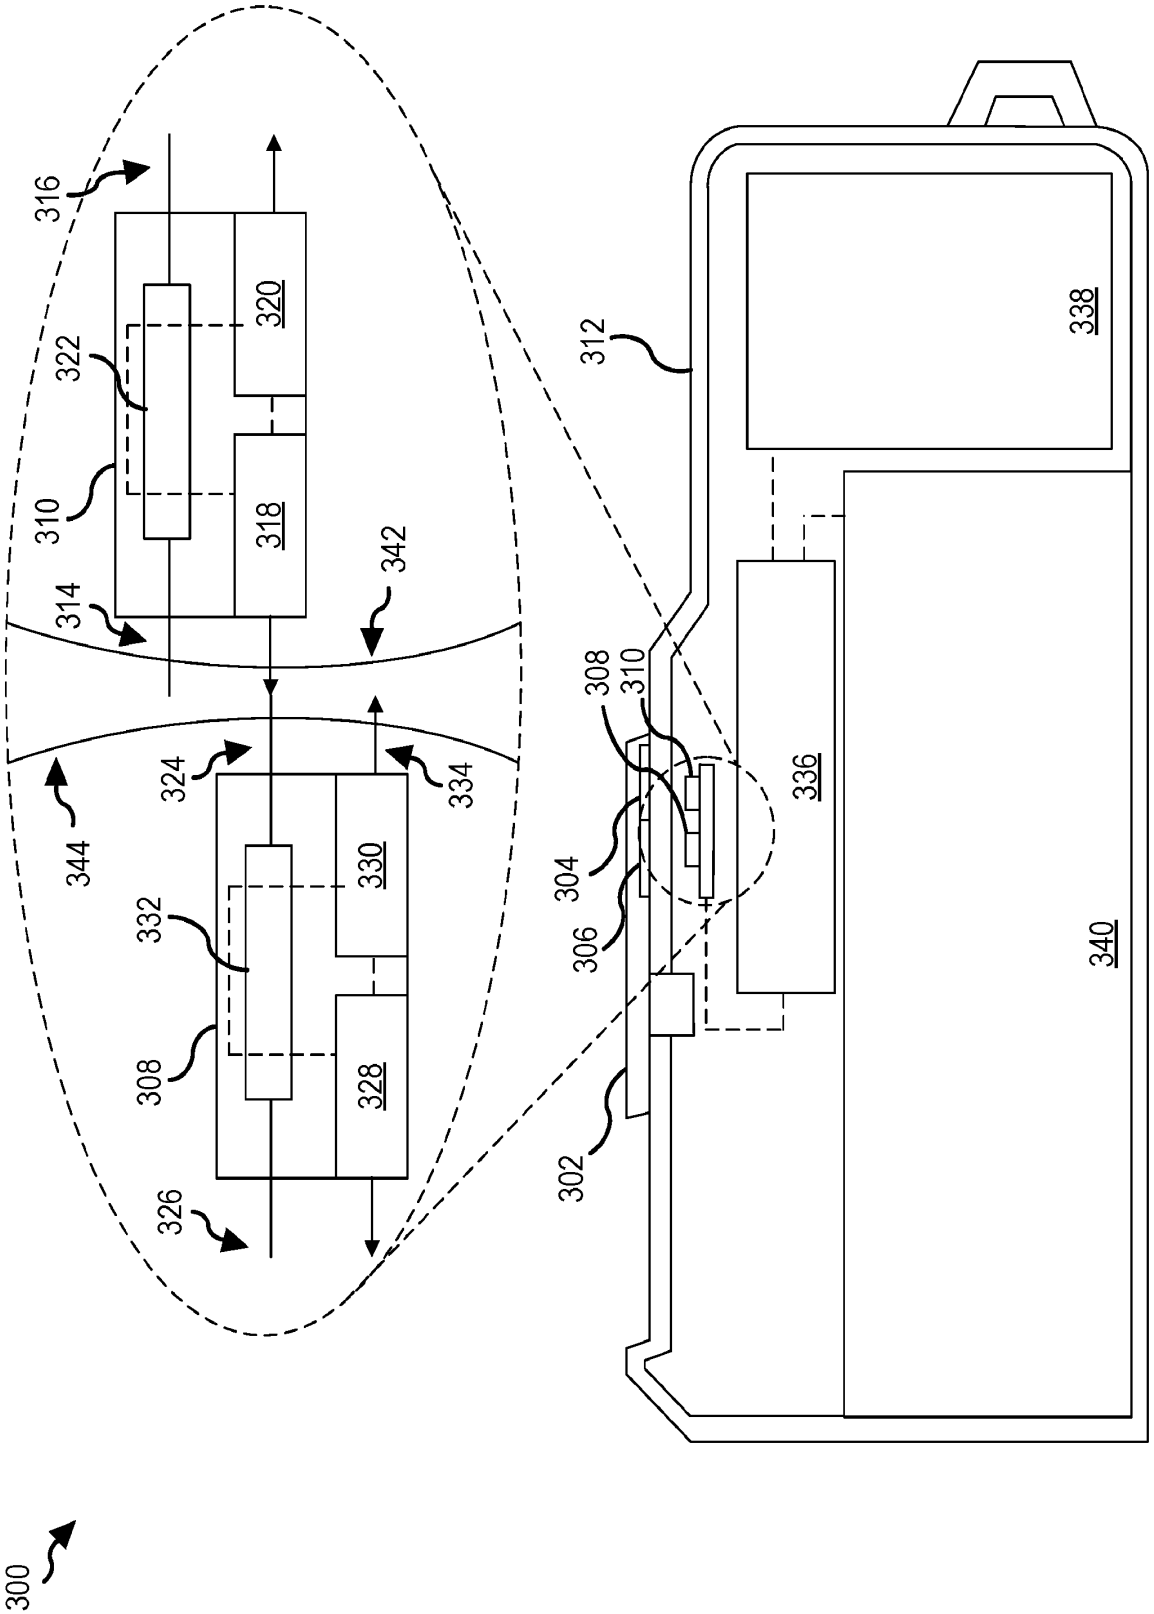

300
302
304
306
308
310
312
316
318
320
322
324
326
328
330
332
334
336
338
340
342
344

FIG. 3C

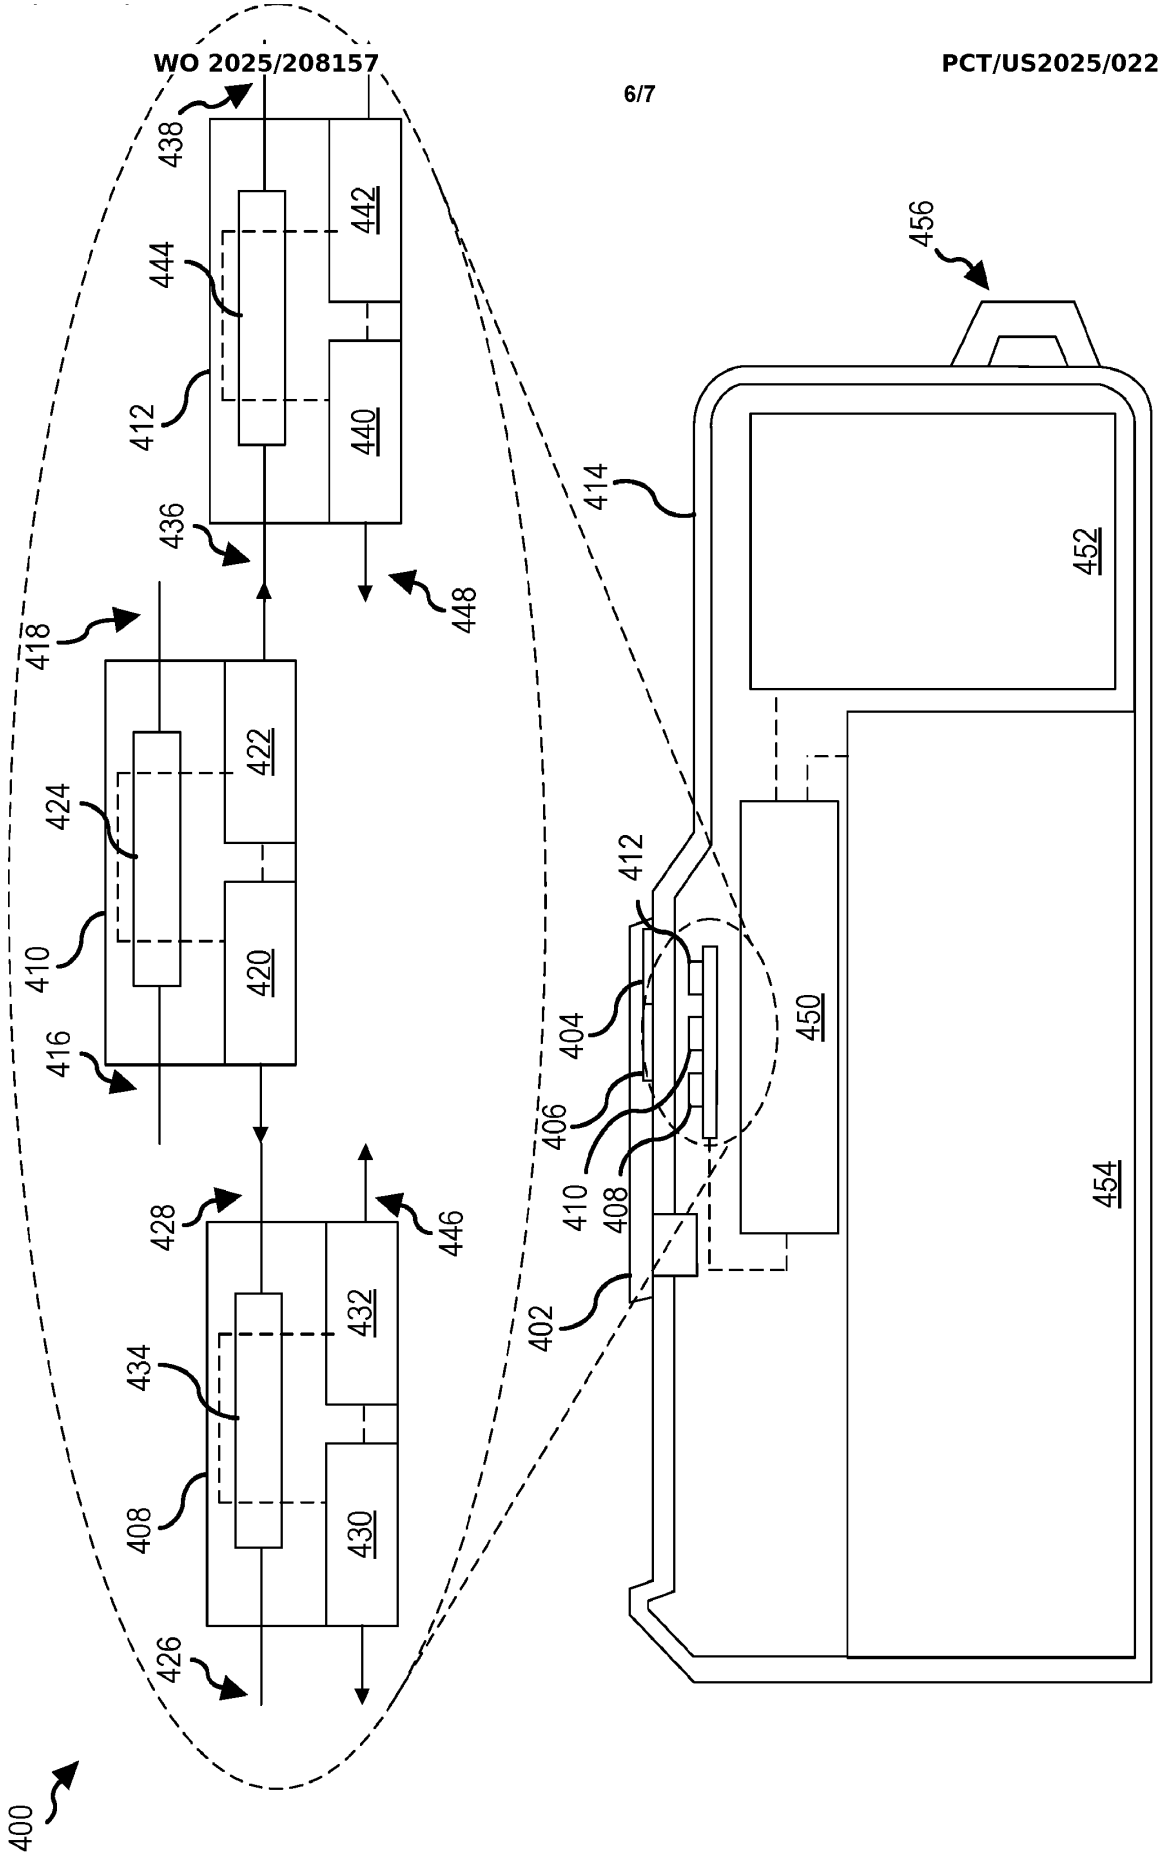

400
402
404
406
408
410
412
414
416
418
420
422
424
426
428
430
432
434
436
438
440
442
444
446
448
450
452
454
456

FIG. 4

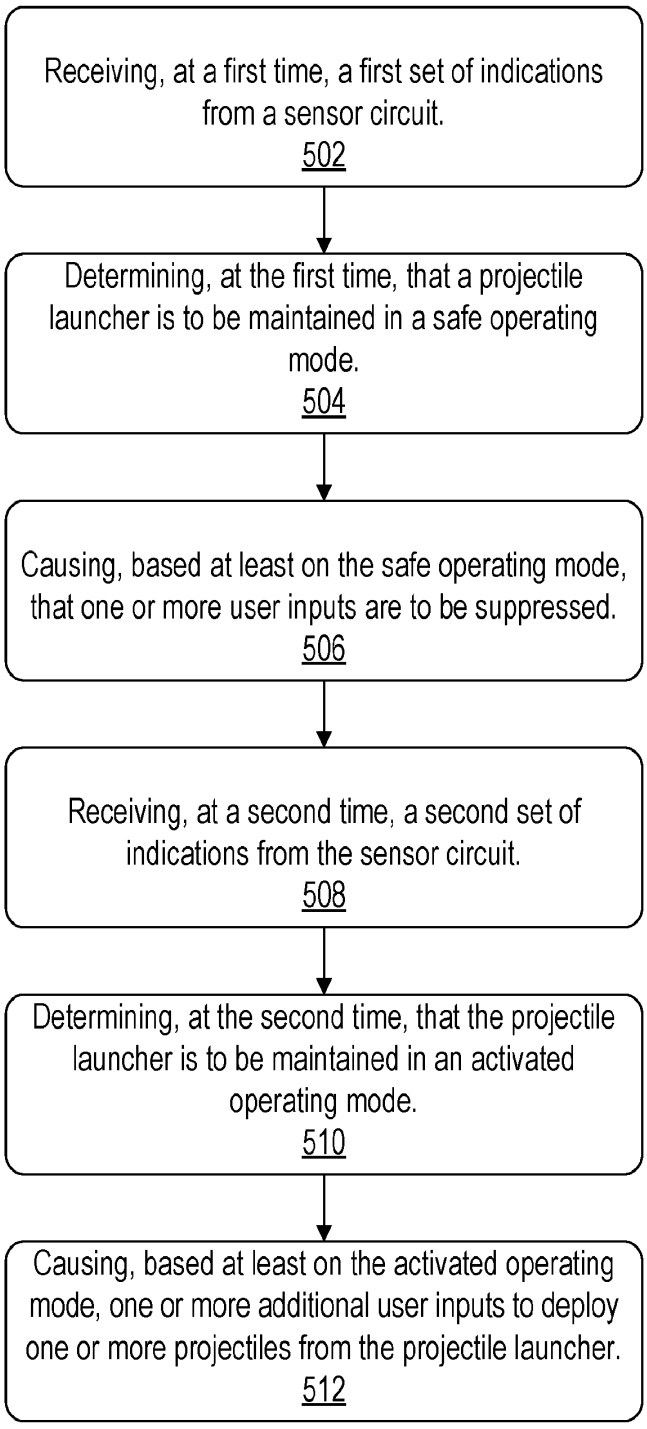

Receiving, at a first time, a first set of indications from a sensor circuit.
502
Determining, at the first time, that a projectile launcher is to be maintained in a safe operating mode.
504
Causing, based at least on the safe operating mode, that one or more user inputs are to be suppressed.
506
Receiving, at a second time, a second set of indications from the sensor circuit.
508
Determining, at the second time, that the projectile launcher is to be maintained in an activated operating mode.
510
Causing, based at least on the activated operating mode, one or more additional user inputs to deploy one or more projectiles from the projectile launcher.
512

FIG. 5