

1/18

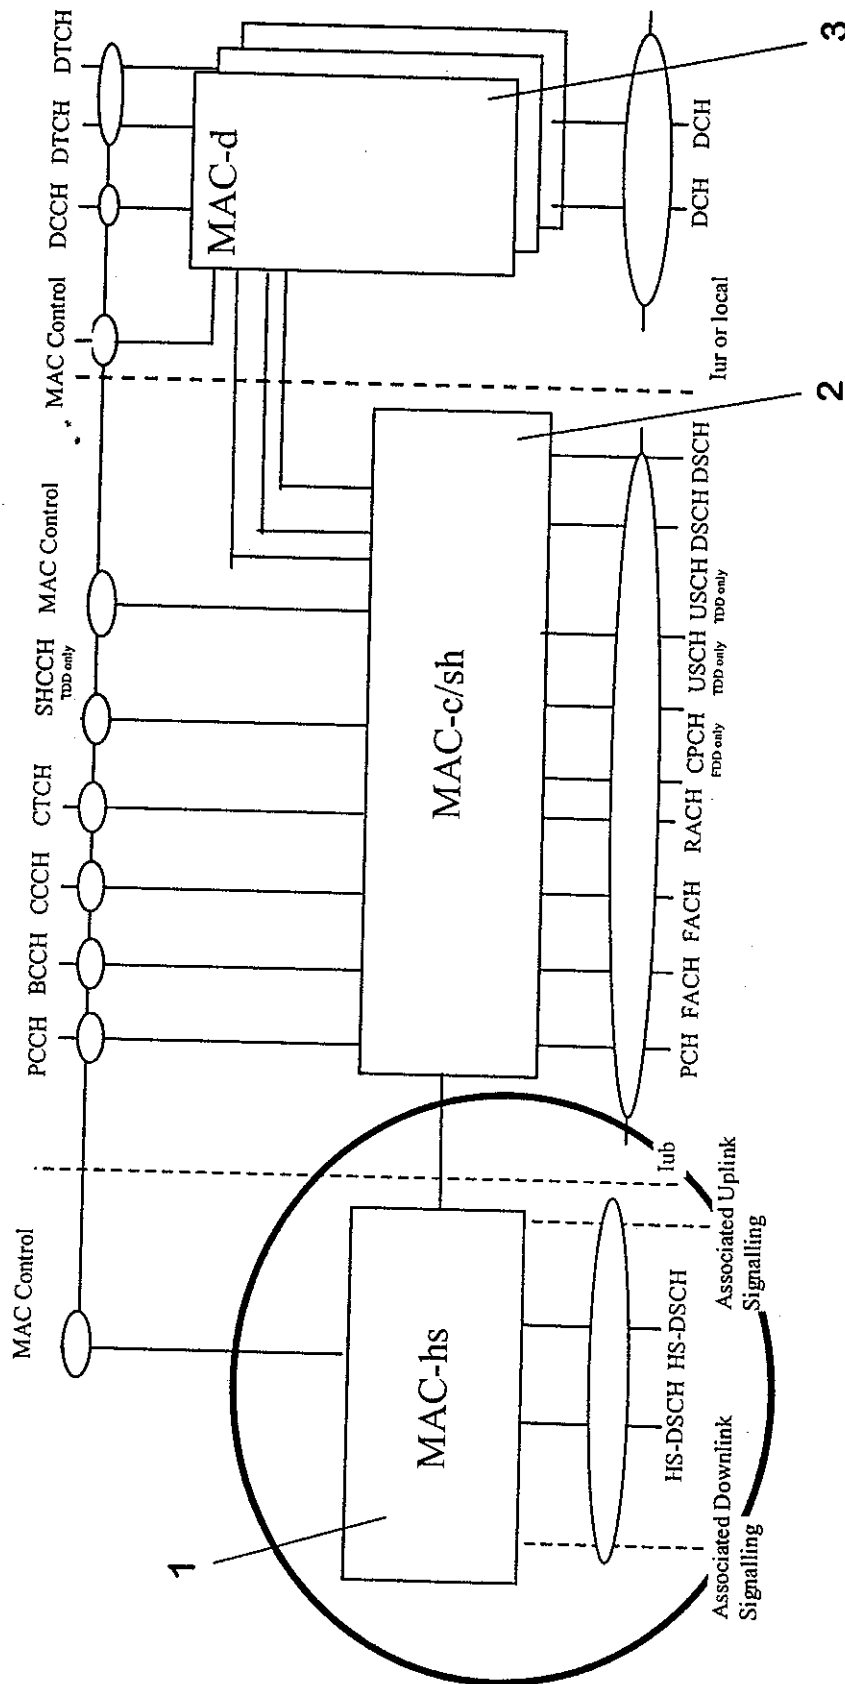


FIG. 1

2/18

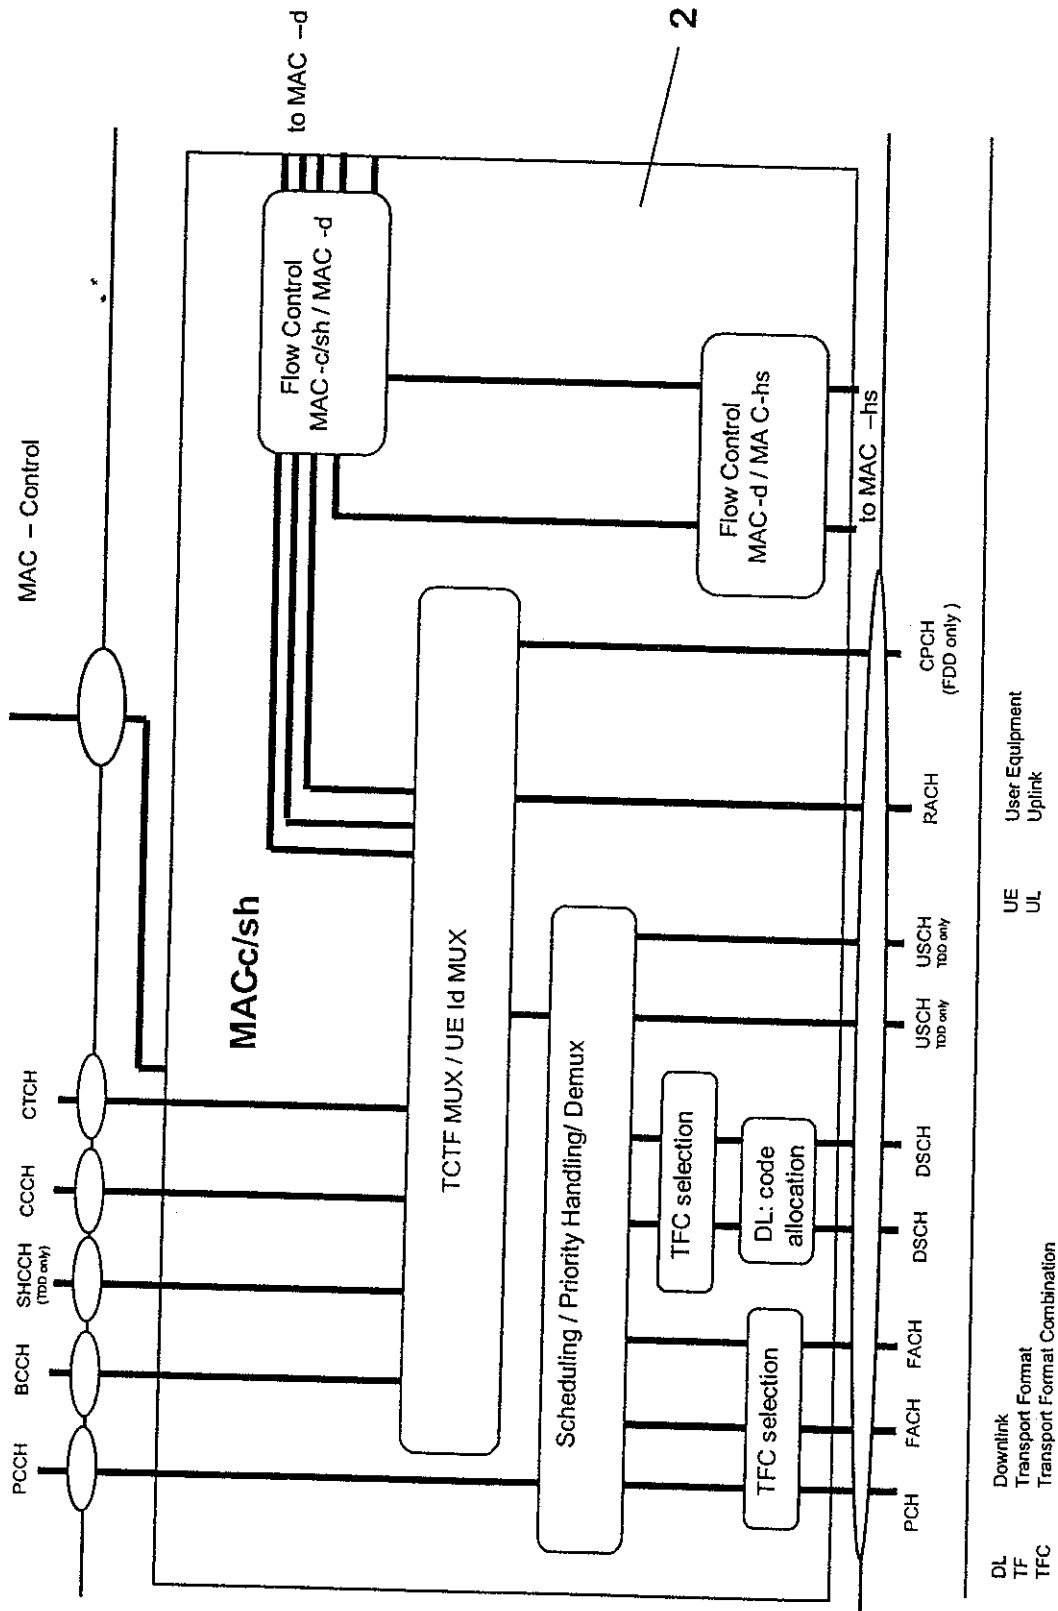


FIG. 2

3/18

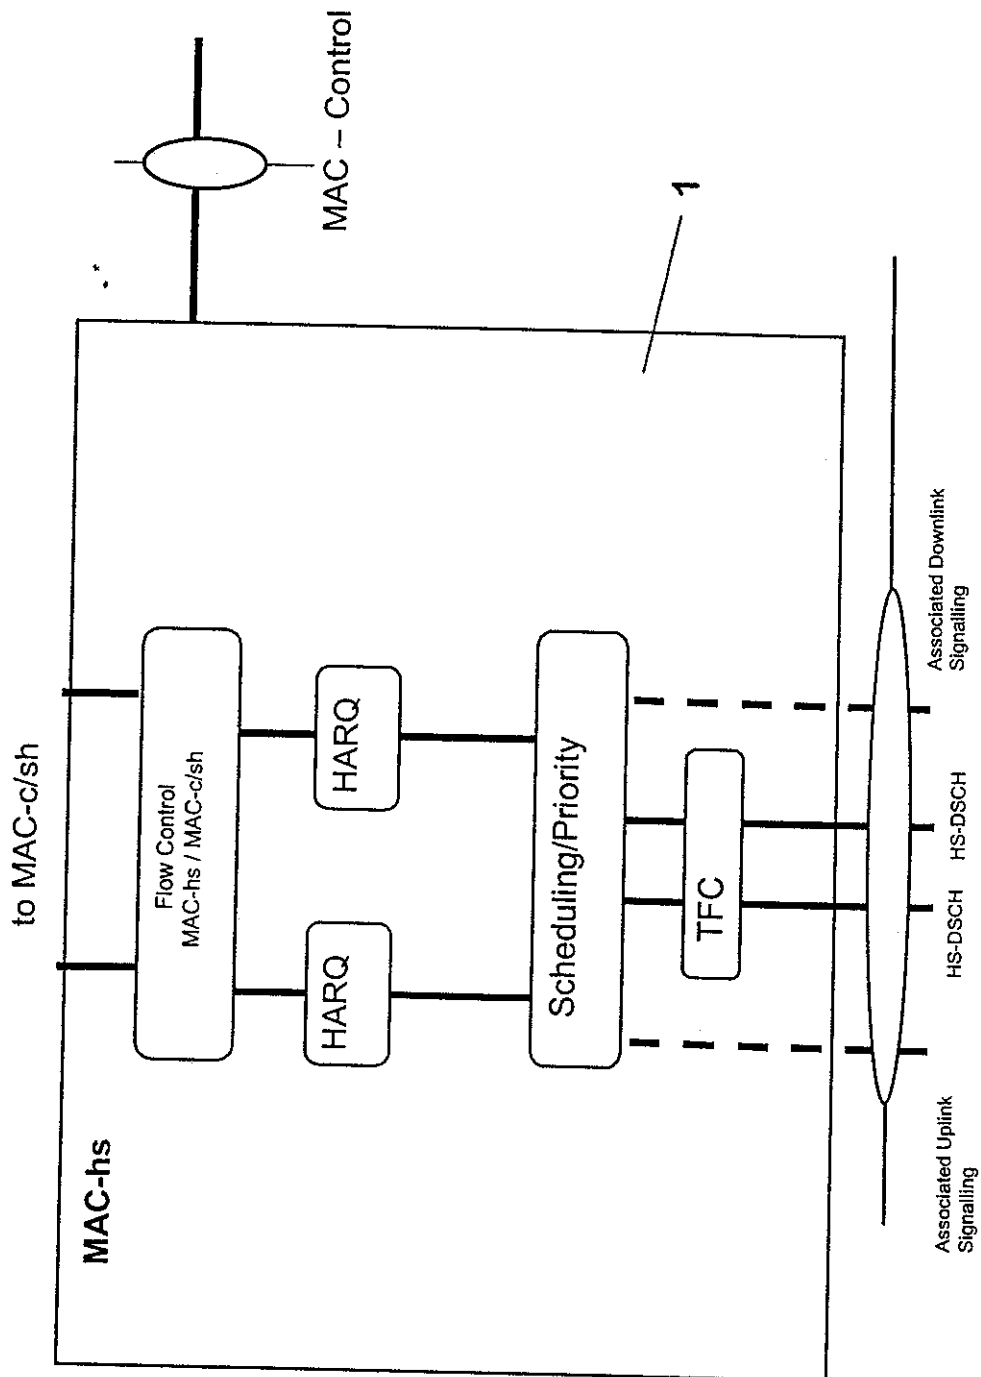


FIG. 3

4/18

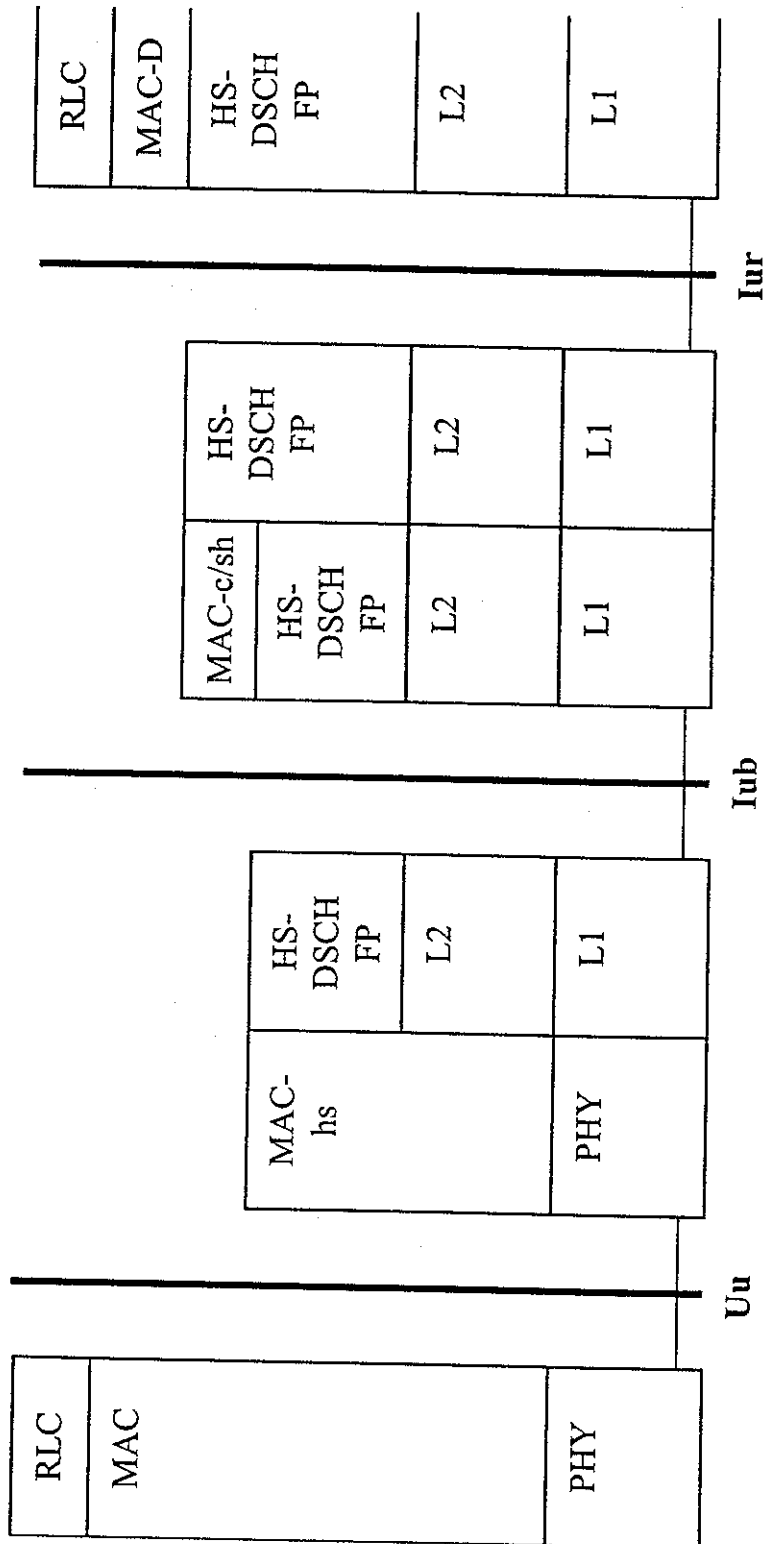


FIG. 4

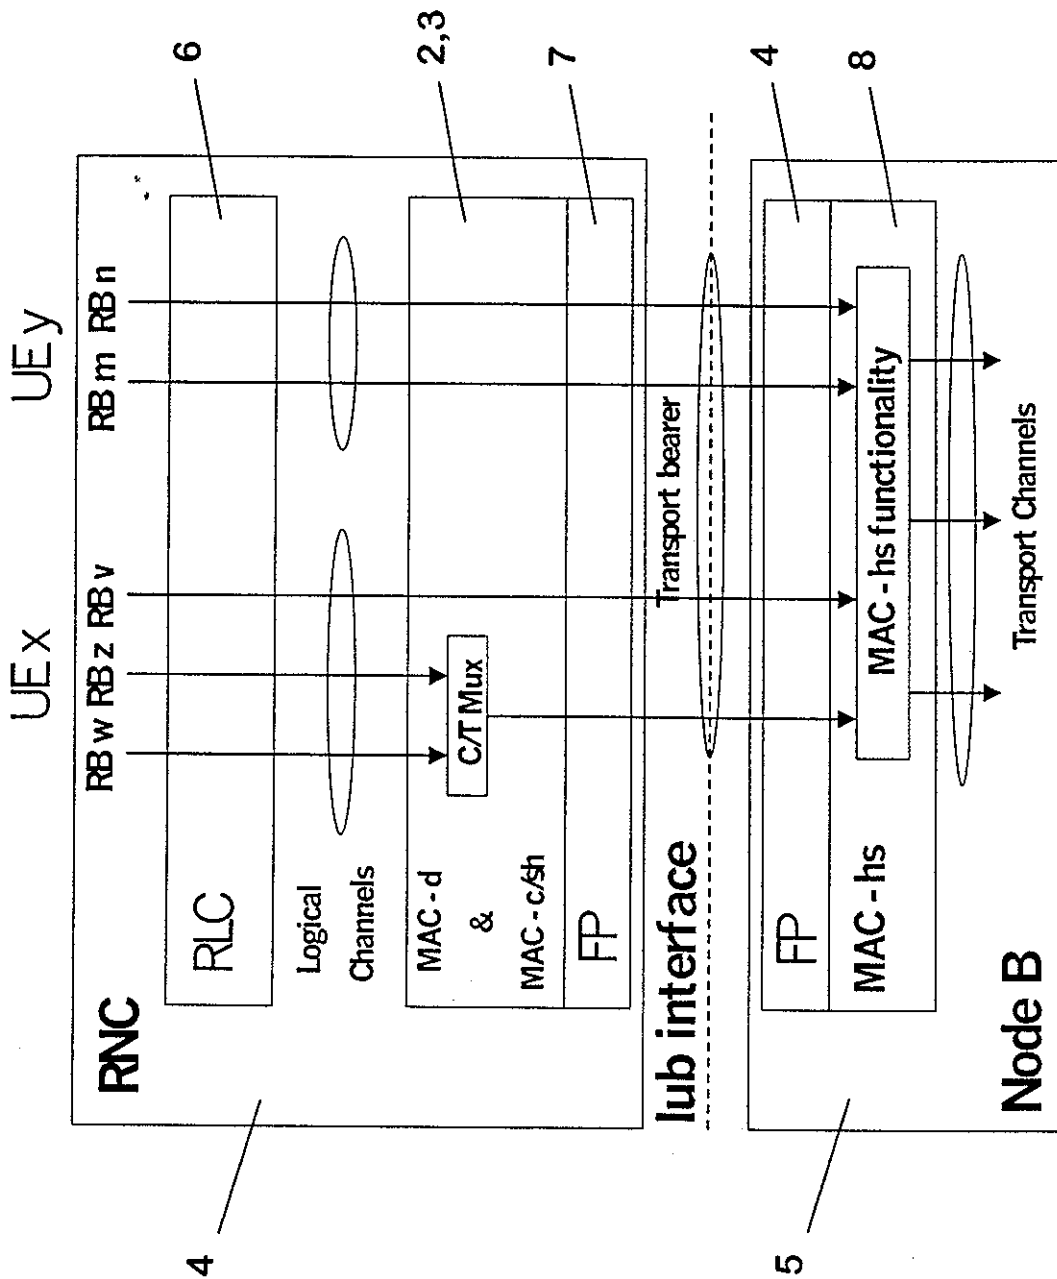


FIG. 5

6/18

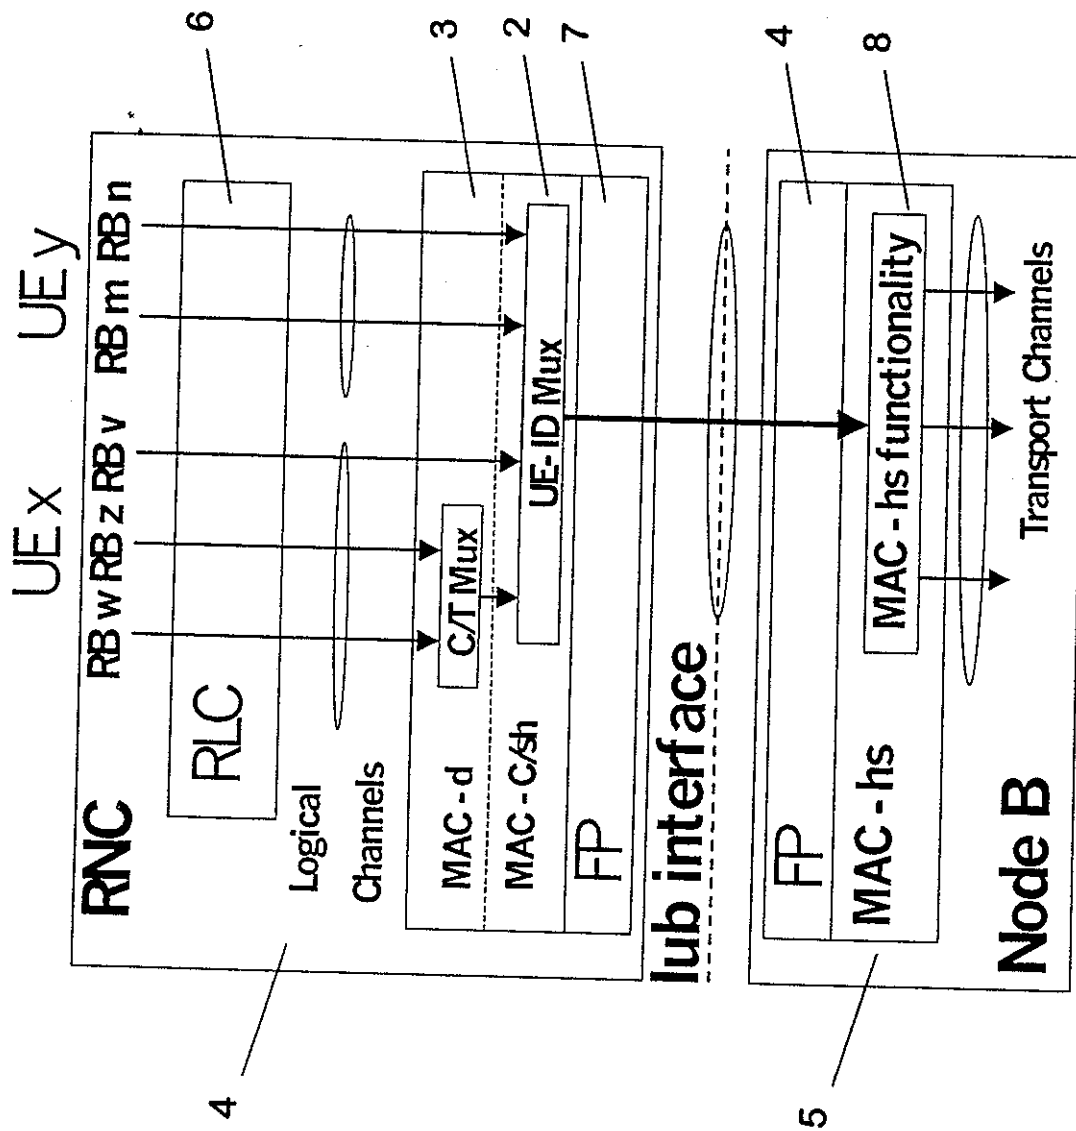


FIG. 6

7/18

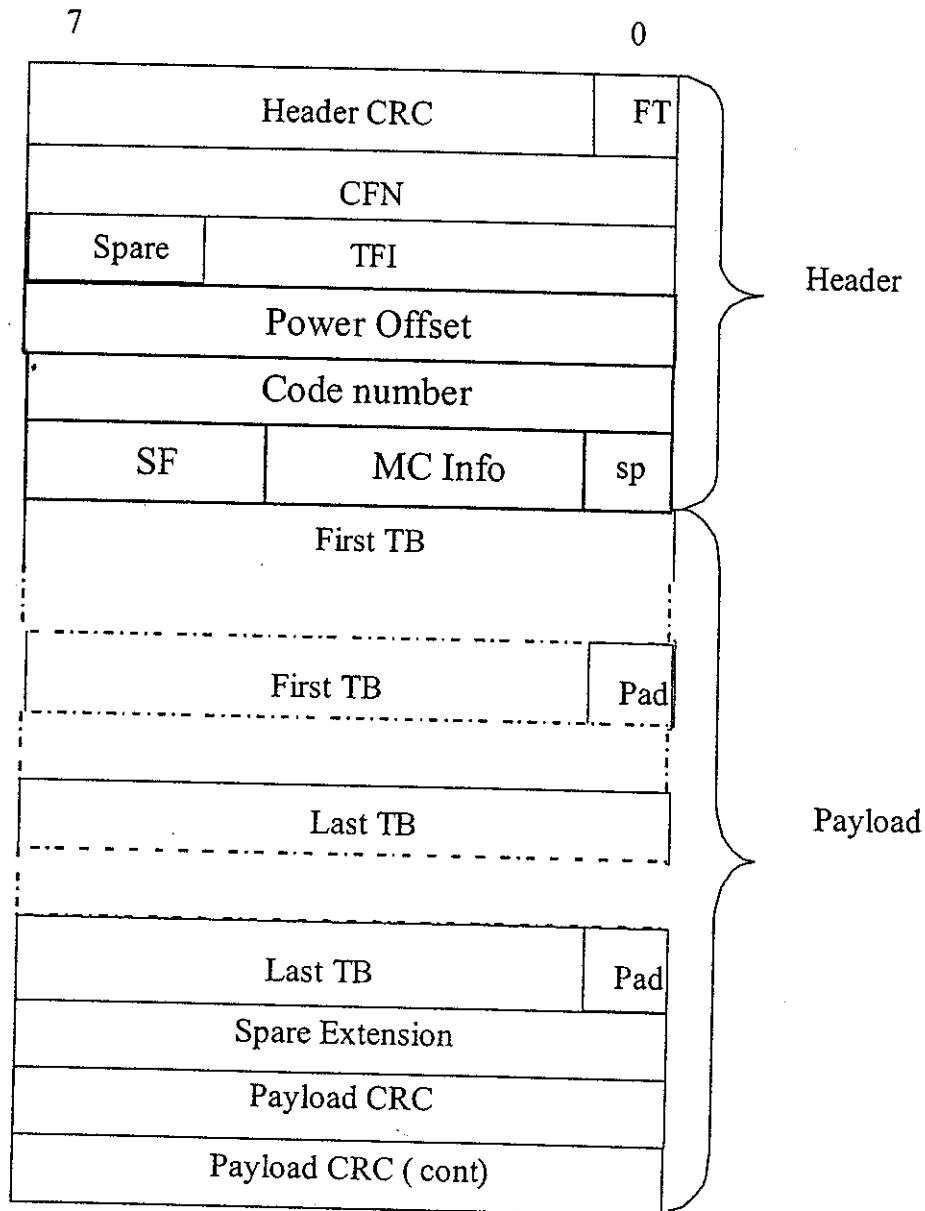


FIG. 7

8/18

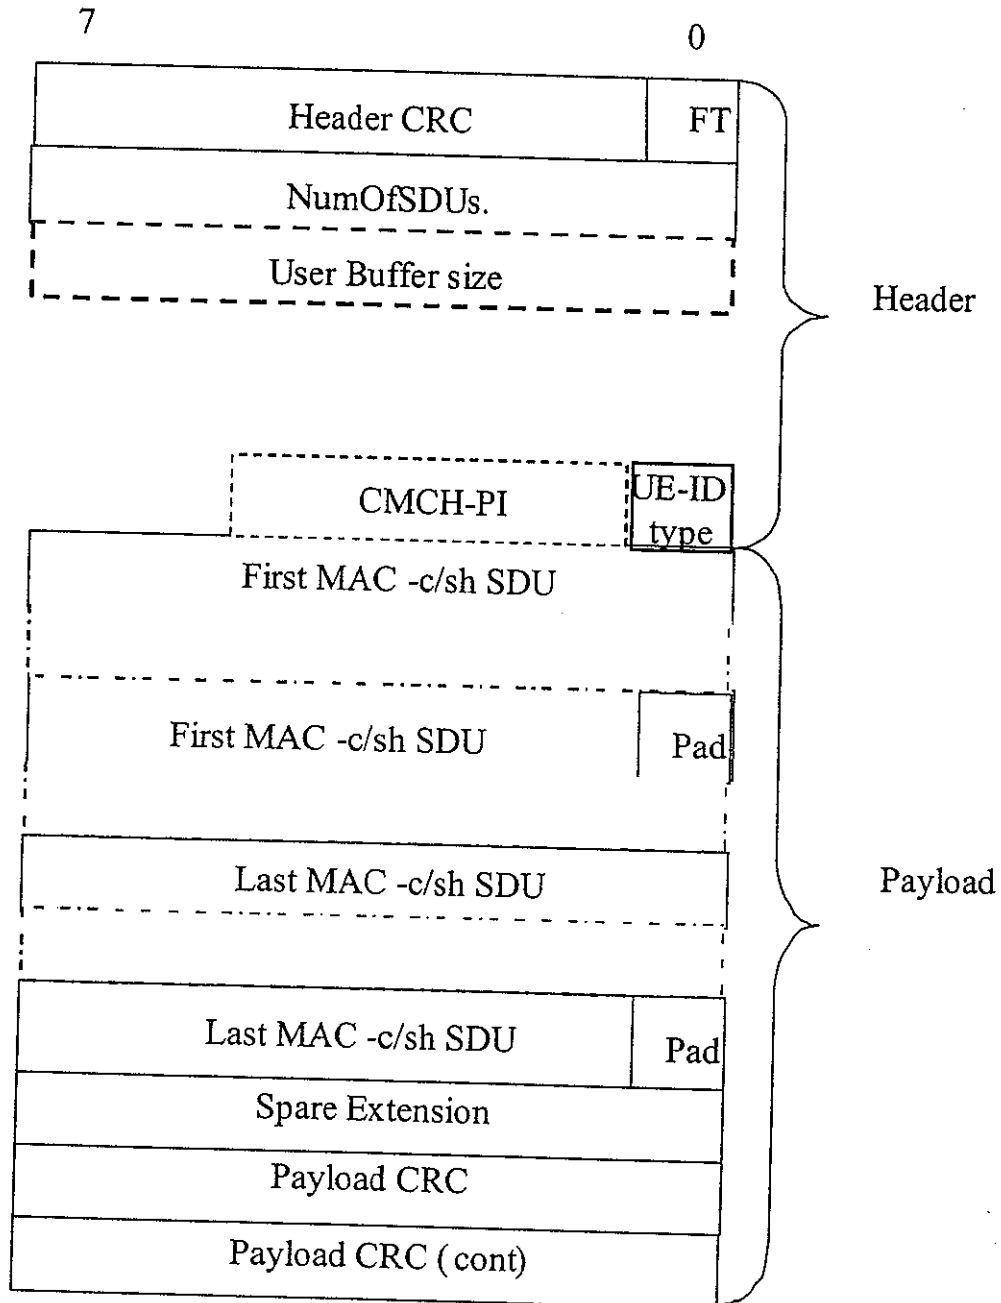


FIG. 8

9/18

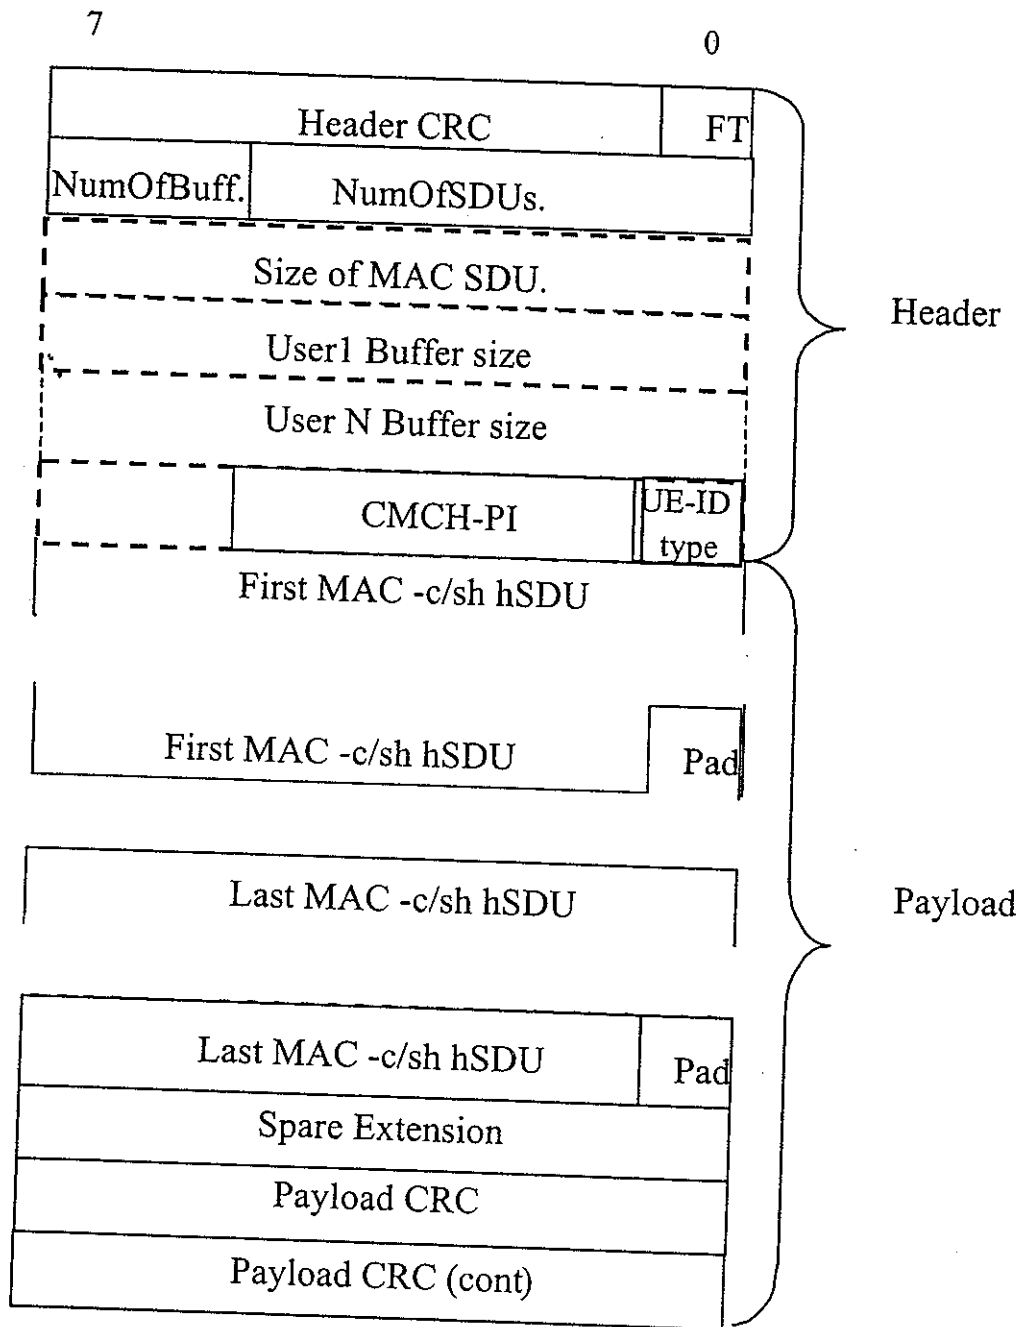


FIG. 9

10/18

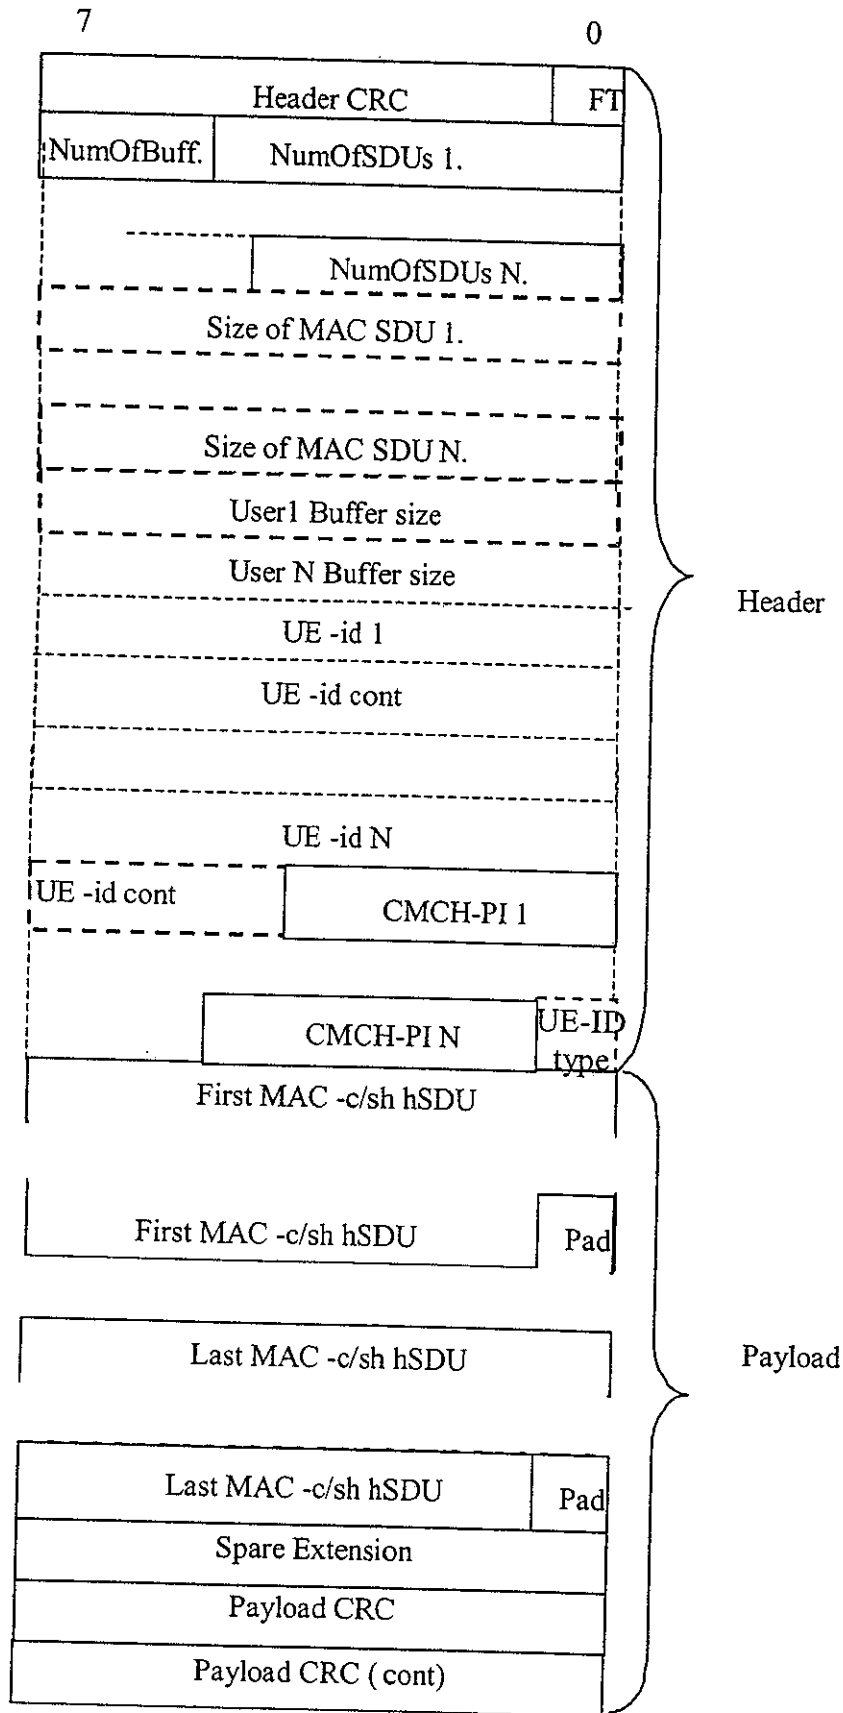


FIG. 10

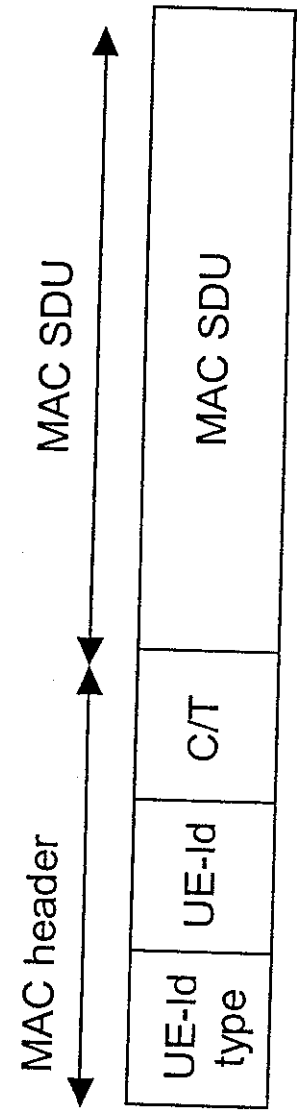


FIG. 11


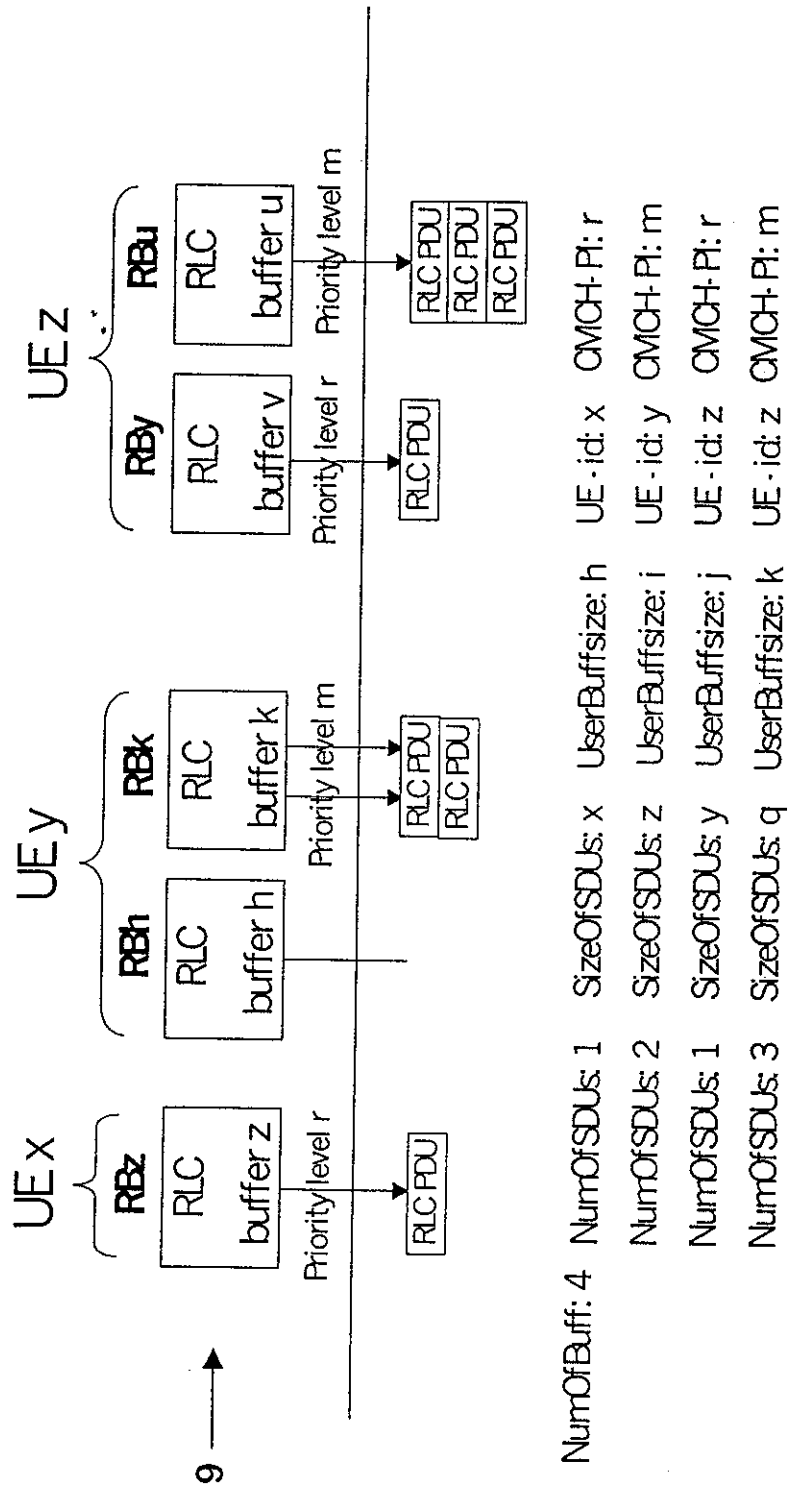


FIG. 12

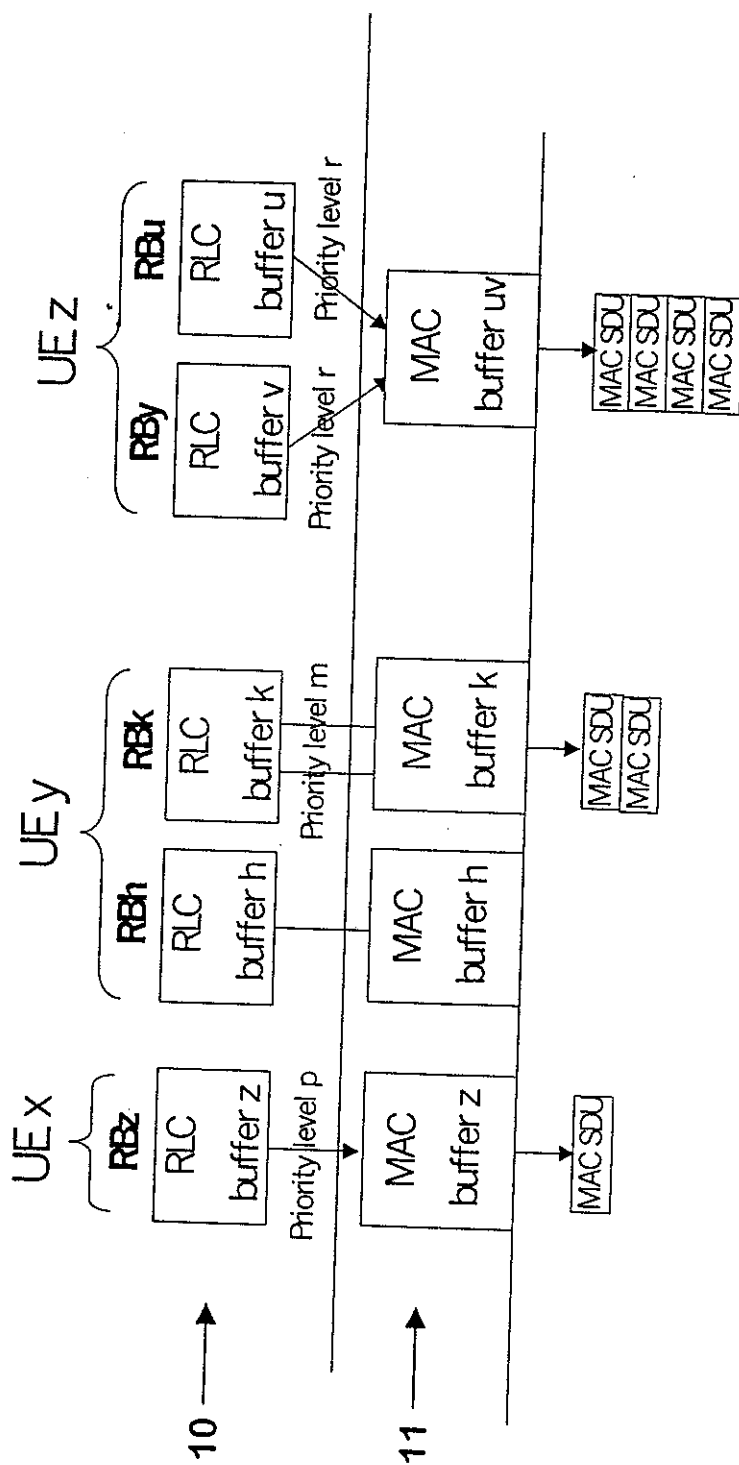

NumOfBuff: 3

NumOfSDUs: 1 SizeOfSDUs: x UserBuffsize: h UE-id: x CMCH-Pi: p

NumOfSDUs: 2 SizeOfSDUs: z UserBuffsize: i UE-id: y CMCH-Pi: m

NumOfSDUs: 4 SizeOfSDUs: y UserBuffsize: j UE-id: z CMCH-Pi: r

FIG. 13

14/18

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description	Criticality	Assigned Criticality
HS_DSCH Information						
>MCS Sets						
>HS_DSCH Power Level						
>NumOf Codes						
>TTI Selection						
>HARQ Information						
>>NumOfChannel						
>>MaxAttempt						
>>Redundancy Ver Domain						

FIG. 14

15/18

IE/Group Name	Presence	Range	IE type and reference	Semantics description
HS_DSCH ID				

FIG. 15

16/18

IE/Group Name	Presence	Range	IE type and reference	Semantics descriptions	Criticality	Assigned Criticality
HS_DSCH Information Response		1 to <Numof HSDSCH>			-	
>HS_DSCH ID	M				-	
>Binding ID	O				-	
>Transport Layer Address	O				-	

Range bound	Explanation
MaxnumHSDSCHs	Maximum number of HS_DSCHs for one UE.

FIG. 16

17/18

IE/Group Name	Presence	Range	IE type and reference	Semantics descriptions	Criticality	Assigned Criticality
HS_DSCH FDD Information		1 to <maxnoof HSDSCHs>			-	
>HS_DSCH ID					-	
>UE ID						
>Transport Format Set					-	
>Allocation/Retention Priority					-	
>Frame Handling Priority					-	
>ToAWS					-	
>ToAWE					-	
>NumOfCodes						
>BufferStatus						
>HARQ Capacity						
>NumOfChannel						
>MaxAttempt						
>RedundancyVer						

Range bound	Explanation
MaxnoofHSDSCHs	Maximum number of HS-DSCHs for one UE.

FIG. 17

18/18

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Dynamic Transport Format Information		1 to <maxTFcount>		The first instance of the parameter corresponds to TFI zero, the second to 1 and so on.
>Number of Transport blocks	M		INTEGER (0..512)	
>Transport Block Size	C – Blocks		INTEGER (0..5000)	Bits
>CHOICE _{mode}	M			
>>TDD				
>>>Transmission Time interval Information	C-TTIdynamic	1 to <maxTTIcount>		
>>>>Transmission time interval	M		Enumerated(10, 20, 40, 80,...)	ms
Semi-static Transport Format Information		1		
>Transmission time interval	M		ENUMERATED (10, 20, 40, 80, dynamic,...,5, 1slot, 3slot, 5slot, 15slot)	ms; Value "dynamic" for TDD only; Value "5" for LCR TDD only, "1slot", "3slot", "5slot" and "15slot" for HS-DSCH only and no other values are applicable to HS-DSCH
>Type of channel coding	M		ENUMERATED (No coding, Convolutional, Turbo,...)	In case HS-DSCH, "Convolutional" shall not be used
>Coding Rate	C – Coding		ENUMERATED (1/2, 1/3,...)	
>Rate matching attribute	M		INTEGER (1..maxRM)	
>CRC size	M		ENUMERATED (0, 8, 12, 16, 24,...)	
>CHOICE _{mode}	M			
>>TDD				
>>>2 nd interleaving mode	M		Enumerated (Frame related, Timeslot related,...)	

FIG. 18