



(51) International Patent Classification:

H03K 3/57 (2006.01) *H03K 17/296* (2006.01)
H02M 7/48 (2007.01) *H03K 17/28* (2006.01)
H03K 17/0412 (2006.01) *H03K 17/284* (2006.01)

(21) International Application Number:

PCT/SE2009/050737

(22) International Filing Date:

15 June 2009 (15.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/144,437 23 June 2008 (23.06.2008) US

(71) Applicant (for all designated States except US): **SCANDINOVA SYSTEMS AB** [SE/SE]; Ultunaallén 2 A, S-756 51 Uppsala (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CREWSON, Walter Frederick John** [US/US]; 74 Hunter Lane, Ridgefield, CT 06877 (US). **LINDHOLM, Mikael Rolf** [SE/SE]; Vårfrukyrka Ål-6, S-745 91 Enköping (SE).

(74) Agent: **AROS PATENT AB**; Box 1544, S-751 45 Uppsala (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: POWER SWITCH GROUPING

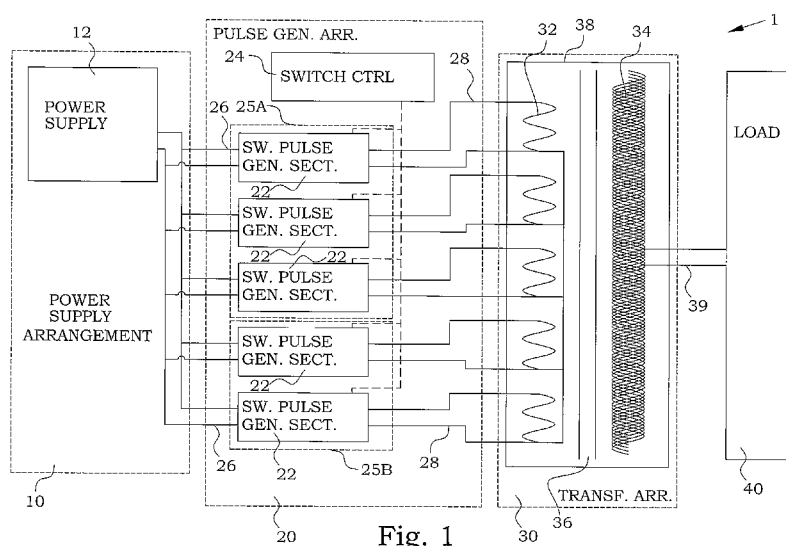


Fig. 1

(57) Abstract: A power modulator comprises a plurality of switched pulse generator sections (22), a power supply arrangement (10), and a transformer arrangement (30). A switch control (24) is connected to said plurality of switched pulse generator sections (22) for providing control signals for turning on and/or turning off them. The switch control (24) is arranged to provide control signals for turning on and/or turning off switched pulse generator sections of a first subset at a first time instant and to provide control signals for turning on and/or turning off switched pulse generator sections of a second subset at a second time instant, different from the first time instant. The second subset is different from the first subset.