

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 January 2002 (24.01.2002)


PCT

(10) International Publication Number
WO 02/06024 A1

- (51) International Patent Classification⁷: **B28C 7/04**,
5/00, 5/46, G05B 15/00, 17/00 [JP/JP]; 2953-36 Onojimachi, Machida-city, Toyko, Tokyo
195-0064 (JP).
- (21) International Application Number: PCT/US01/21352 (74) Agents: **LEON, Craig K.** et al.; W.R. Grace & Co.-Conn.,
62 Whittemore Avenue, Cambridge, MA 02140 (US).
- (22) International Filing Date: 5 July 2001 (05.07.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2000/203445 5 July 2000 (05.07.2000) JP
- (71) Applicant (for all designated States except US): **W.R. GRACE & CO.-CONN.** [US/US]; 1114 Avenue of the Americas, New York, NY 10036 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **NAKAMURA, Seiji**
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONTROLLING READY MIXED CONCRETE SLUDGE WATER

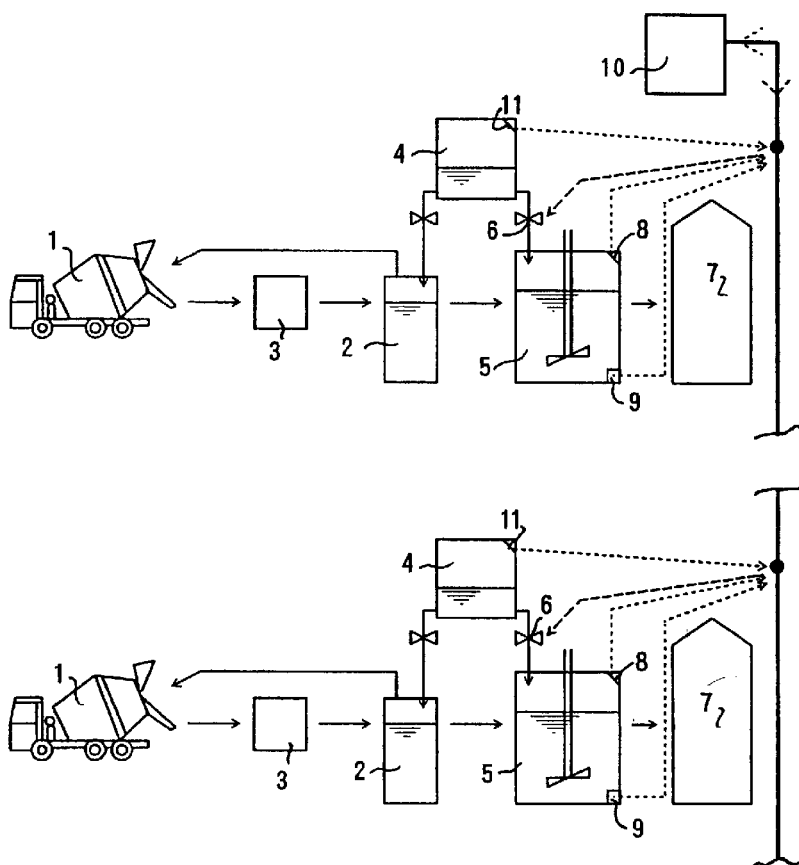

(57) Abstract: Method and system for concrete wash-out water re-use, wherein an apparatus such as a mixing truck (1) is washed out and sludge (2) water re-used. The invention comprises providing sensors (11), in a communication system connected with a control center (10), for determining amount of retarder (4) used and resulting sludge water/concentration. The data is analyzed such that overdoses or insufficient doses of retarder are minimized or prevented. Warnings or corrective signals can then be sent by the control center (10) if needed.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.